




DESIGNER'S KIT KHFC2-086+

Coaxial Cables



DC to 18 GHz, SMA-Male Connectors

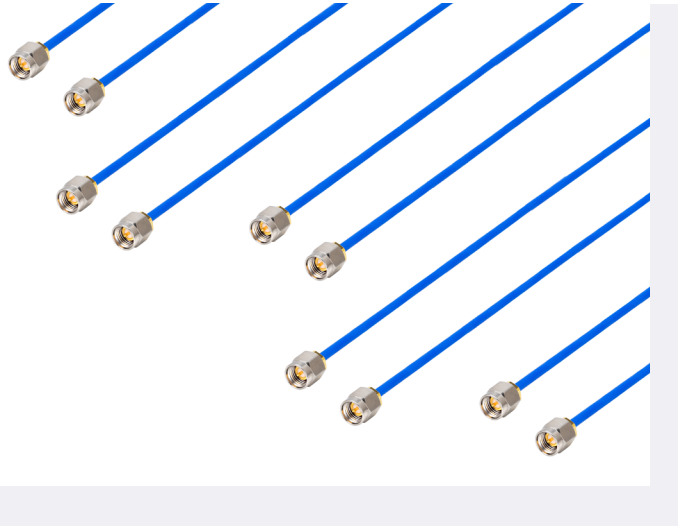

FEATURES

- Hand Formable
- Choice of cable lengths
- Robust
- Tight Bend Radius, 6mm Radius Min.
- Excellent Return Loss
- Excellent Insertion Loss
- Very Low Cost



KHFC2-086+ ELECTRICAL SPECIFICATIONS

(kit includes 5 of each model, total 50 pieces)

Model No. ¹	Freq. (GHz) f_L - f_U	Length ² (Inches)	Insertion loss (dB)				Return Loss (dB)			
			DC - 2 GHz Typ.	2 - 6 GHz Typ.	6 - 10 GHz Typ.	10 - 18 GHz Typ.	DC - 2 GHz Typ.	2 - 6 GHz Typ.	6 - 10 GHz Typ.	10 - 18 GHz Typ.
086-2SM+	DC-18	2	0.10	0.16	0.19	0.33	30	25	25	18
086-3SM+	DC-18	3	0.04	0.14	0.2	0.31	49	37	33	27
086-4SM+	DC-18	4	0.05	0.16	0.23	0.34	46	37	33	26
086-5SM+	DC-18	5	0.06	0.20	0.29	0.41	46	37	33	27
086-6SM+	DC-18	6	0.08	0.26	0.34	0.52	49	40	34	27
086-7SM+	DC-18	7	0.10	0.28	0.42	0.60	47	40	32	26
086-8SM+	DC-18	8	0.10	0.31	0.46	0.69	46	43	36	27
086-9SM+	DC-18	9	0.11	0.36	0.54	0.79	47	39	33	29
086-10SM+	DC-18	10	0.12	0.38	0.58	0.85	45	40	35	27
086-12SM+	DC-18	12	0.14	0.46	0.69	1.01	45	41	36	30

1. Unjacketed cable also available upon request.
 2. Custom sizes available upon request.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)