

# Frequency Mixer WIDE BAND

## SIM-153LH+

Level 10 (LO Power +10 dBm) 3200 to 15000 MHz



Generic photo used for illustration purposes only

CASE STYLE: HV1195

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

For extended temperature range, consult factory.  
Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7


### Outline Drawing

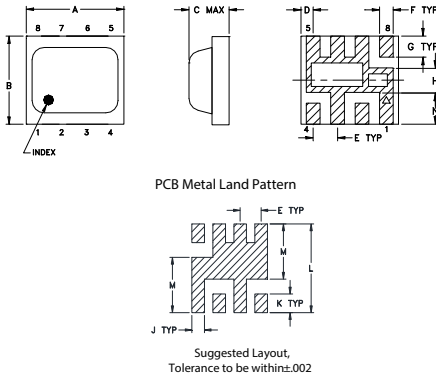

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.200	.180	.087	.025	.050	.028	.043
5.08	4.57	2.2098	0.64	1.27	0.71	1.09
H	J	K	L	M	N	wt
.050	.030	.043	.204	.127	0.065	grams
1.27	0.76	1.09	5.18	3.23	1.65	0.08

### Demo Board MCL P/N: TB-458+ Suggested PCB Layout (PL-517)

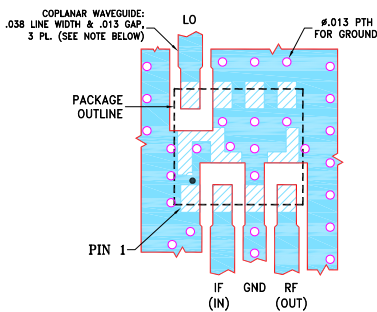

- NOTES:
- TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .0028/.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- 

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)

### Features

- wide bandwidth, 3200 to 15000 MHz
- low conversion loss, 6.1 dB typ.
- high L-R isolation, 36 dB typ.
- excellent IF BW, DC to 4000 MHz
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected by US patent 7,027,795

### Applications

- satellite up and down converters
- defense radar and communications
- line of sight links
- federal fixed service
- WIFI
- blue tooth
- VSAT
- ISM

### Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
	LO/RF $f_c-f_u$	IF		Typ.	Min.	Typ.	Min.	
3200-15000	DC-4000							
3200-4500		Typ.	$\sigma$	Max.	Typ.	Min.	Typ.	Min.
4500-5100		6.4	0.2	8.9	40	32	19	13
5100-14000		6.5	0.2	8.7	38	32	15	10
14000-15000		7.5	0.4	12.4	35	23	15	9
		7.8	0.3	10.3	30	17	28	19


1 dB Compression: +3 dBm typ.









\* Conversion loss at 30 MHz IF.  $\sigma$  is a measure of repeatability from unit to unit.

### Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)		Isolation L-R (dB)		Isolation L-I (dB)		VSWR RF Port (:1)		VSWR LO Port (:1)	
	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm		
3200.00	6.79	40.99	20.99	2.37	13.77					
4000.00	6.14	40.60	18.67	3.17	5.31					
4500.00	6.20	36.96	15.28	2.55	3.13					
5000.00	6.53	39.95	13.46	3.80	1.69					
5600.00	6.82	38.66	14.05	3.82	2.42					
6500.00	5.78	39.33	16.94	2.37	2.99					
7400.00	5.18	35.38	16.21	1.28	3.04					
8000.00	5.34	27.64	11.48	1.59	2.38					
8500.00	5.64	28.80	15.40	2.21	1.70					
9000.00	6.60	41.06	22.55	3.22	1.81					
9500.00	7.58	32.65	20.12	3.61	2.04					
10000.00	8.06	35.87	19.69	4.59	2.89					
11000.00	8.79	42.06	28.67	5.03	2.72					
12000.00	9.65	35.00	41.07	5.08	2.82					
12600.00	9.68	35.75	40.20	5.15	2.00					
13050.00	9.86	38.27	36.10	4.51	1.87					
13500.00	9.68	37.53	33.24	4.42	2.32					
14025.00	8.42	37.98	30.91	2.53	2.74					
14550.00	7.32	32.13	29.55	1.16	2.43					
15075.00	8.42	24.21	30.95	1.92	2.93					

### Electrical Schematic

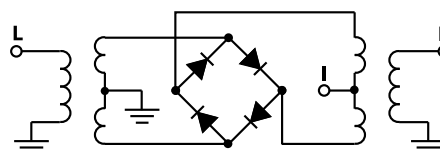

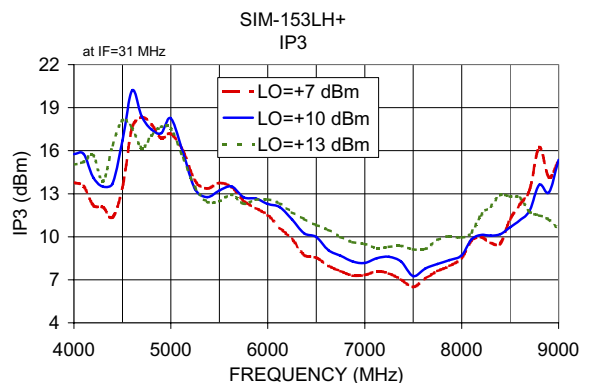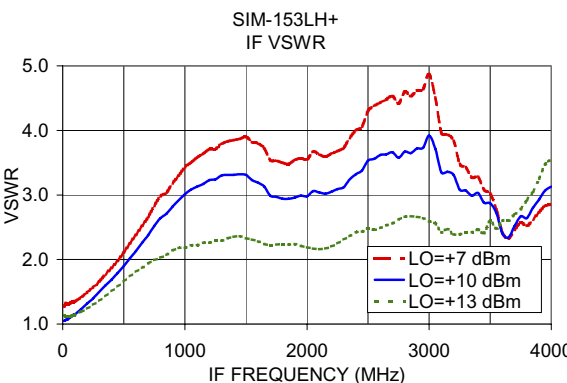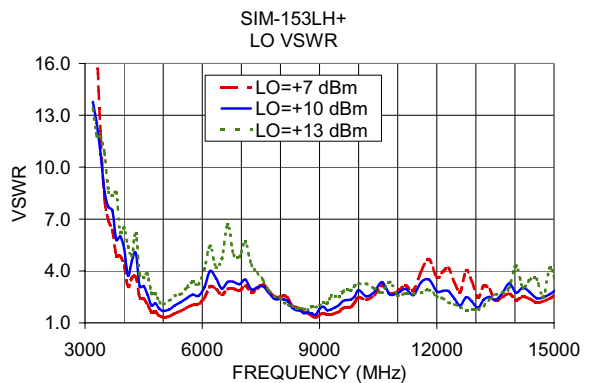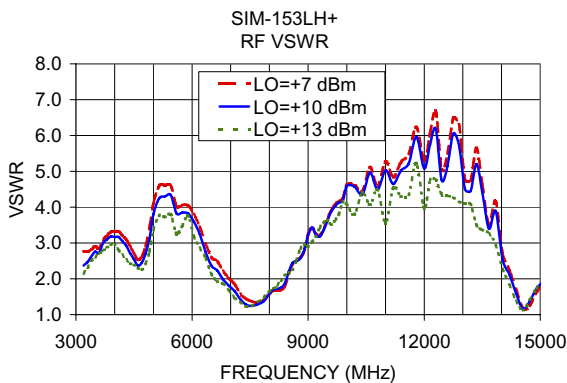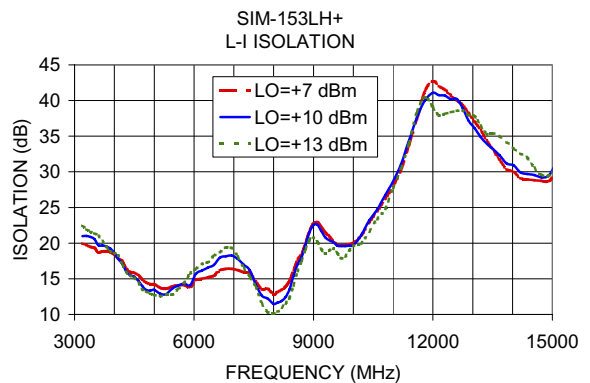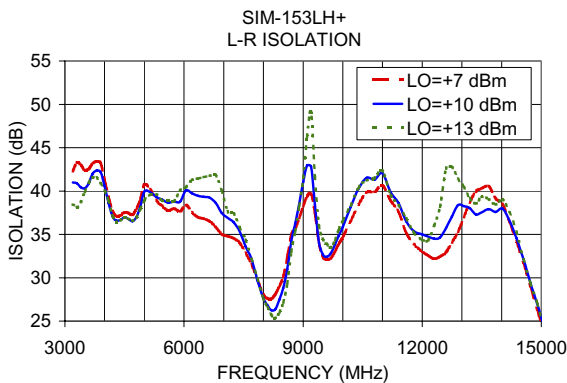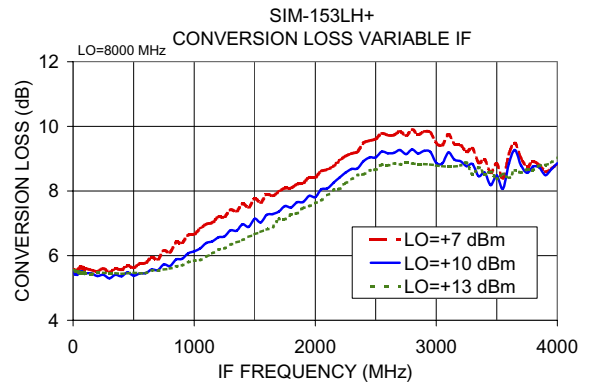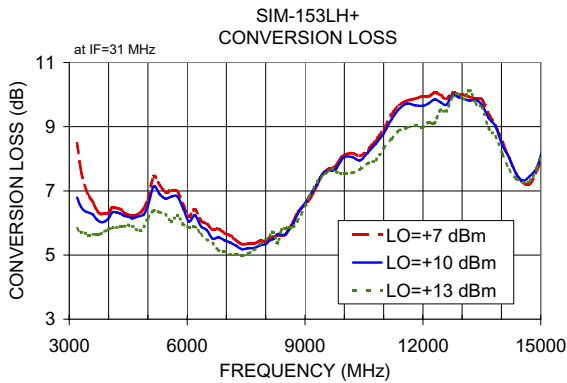

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Mixer](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[HMC337-SX](#) [mamx-009646-23dbm1](#) [MC4507-2](#) [HMC339-SX](#) [CSM5T](#) [CHR3664-QEG](#) [HMC8192-SX](#) [MIQ24MS-2](#) [HMC220BMS8GETR](#)  
[M85C](#) [M74C](#) [MD-174-PIN](#) [HMC554A-SX](#) [HMC521A-SX](#) [HMC521ACHIPS](#) [HMC558A](#) [HMC8191](#) [CMD258](#) [LT5511EFE](#) [MAMX-](#)  
[011023-SMB](#) [HMC399MS8TR](#) [HMC333TR](#) [HMC214MS8TR](#) [HMC175MS8TR](#) [HMC1043LC3TR](#) [MAMXSS0012TR-3000](#) [109728-](#)  
[HMC129LC4](#) [CSM2-13](#) [CSM1-13](#) [HMC785LP4ETR](#) [LT5526EUF#PBF](#) [LT5579IUH#PBF](#) [HMC773ALC3BTR](#) [HMC558ALC3B](#)  
[HMC329ALC3B](#) [MY63H](#) [SMA5101-TL-H](#) [AD8343ARUZ-REEL7](#) [AD608AR](#) [AD608ARZ](#) [AD831APZ-REEL7](#) [AD8342ACPZ-REEL7](#)  
[AD8343ARUZ](#) [AD8344ACPZ-REEL7](#) [ADL5363ACPZ-R7](#) [ADL5365ACPZ-R7](#) [ADL5802ACPZ-R7](#) [HMC1048ALC3B](#) [HMC1056LP4BE](#)  
[HMC1057-SX](#)