

Surface Mount 
RF Transformer

TCM2-672X+

50Ω 1700 to 6700 MHz



CASE STYLE: DB1627

The Big Deal

- Wideband, 1700 to 6700 MHz
- Low insertion loss, 1.1 dB
- Flat insertion loss, ± 0.4 dB typ.
- Good input return loss, 12 to 31 dB typ.
- Low phase and amplitude unbalance, 6° , 0.8 dB

Product Overview

Mini-Circuits' TCM2-672X+ is a surface-mount transmission line core and wire transformer covering a very wide frequency range from 1700 to 6700 MHz. The transformer provides low insertion loss with excellent flatness over its entire frequency range. It achieves low phase and amplitude unbalance and excellent input return loss performance. Featuring core and wire construction on a 6-lead plastic base with tin over nickel termination finish, the unit measures 0.16 x 0.15 x 0.16", accommodating dense circuit board layouts. It also incorporates Mini-Circuits' Top Hat® feature for faster, more accurate pick-and-place assembly and easy visual inspection.

Key Features

Feature	Advantages
Wideband, 1700 to 6700 MHz	Very wide frequency range covers bandwidth requirements for many broadband applications.
Low insertion loss, 1.1 dB	TCM2-672X+ provides excellent signal transmission from input to output with consistent performance across its entire frequency range.
Good input return loss, 12 to 31 dB	Provides good matching with minimal signal reflection.
Small footprint (0.16 x 0.15 x 0.16")	Accommodates tight space requirements for dense PCB layouts.
Top Hat® feature	Improves speed and accuracy of pick and place assembly and provides clear device marking for visual inspection.

Surface Mount RF Transformer

TCM2-672X+

50Ω 1700 to 6700 MHz

Features

- wide bandwidth 1700 to 6700 MHz
- balanced transmission line
- excellent return loss
- aqueous washable

Applications

- PCS
- wideband push-pull amplifiers
- cellular



Generic photo used for illustration purposes only

CASE STYLE: DB1627

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (<i>secondary/primary</i>)			2		
Frequency Range		1700		6700	MHz
Insertion Loss	1700 - 6700	—	1.1	2.5	dB
Amplitude Unbalance	1700 - 6700	—	0.8	—	dB
Phase Unbalance	1700 - 6700	—	6	—	Degree

Electrical Schematic

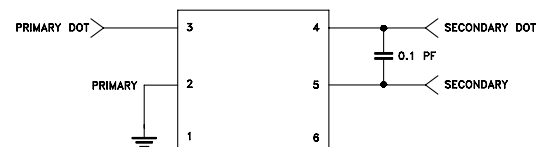

Maximum Ratings


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.4W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

Function	Pin Number
PRIMARY DOT	3
PRIMARY (GND)	2
SECONDARY DOT	4
SECONDARY	5
NOT USED	1,6

Product Marking




Config. G




TCM2-672X+


Outline Drawing

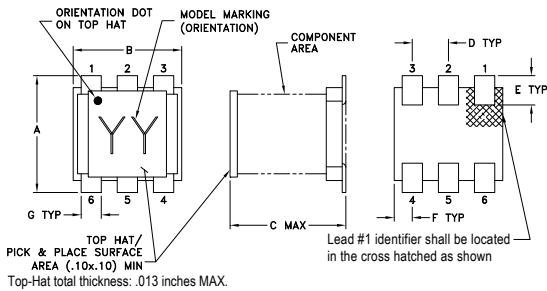

PCB Land Pattern



Demo Board MCL P/N: TB-742+ Suggested PCB Layout (PL-422)

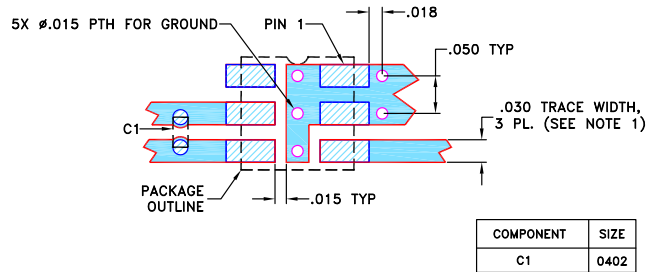

NOTES:





- TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .0133"±.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE.
 - FOR COMPONENT VALUES REFER TO TB-742+.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

Typical Performance Data

Frequency (MHz)	Avg. Insertion Loss (dB)	Input R. Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (Deg.)
1700	0.73	12.81	1.02	2.84
2100	0.68	14.88	0.67	4.96
2500	0.70	16.69	0.42	6.09
3100	0.84	15.62	0.09	6.95
3500	0.95	14.56	0.17	6.87
4100	1.10	13.88	0.35	5.43
4500	1.19	14.52	0.48	4.87
5100	1.22	19.23	0.57	2.98
6100	1.19	22.57	0.39	0.25
6700	1.30	31.04	0.20	0.17

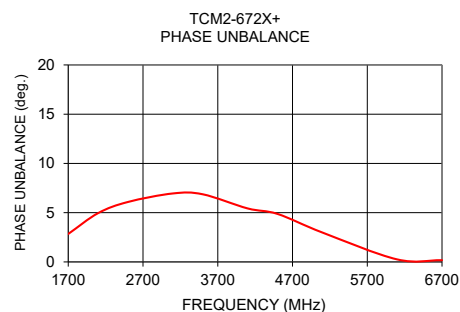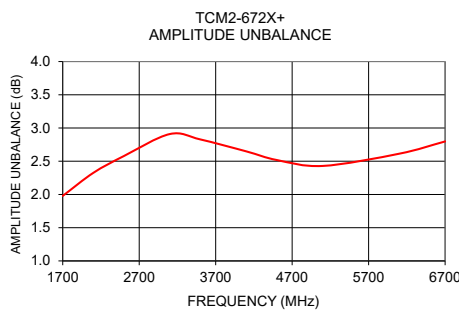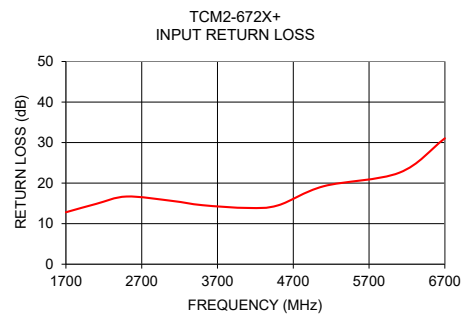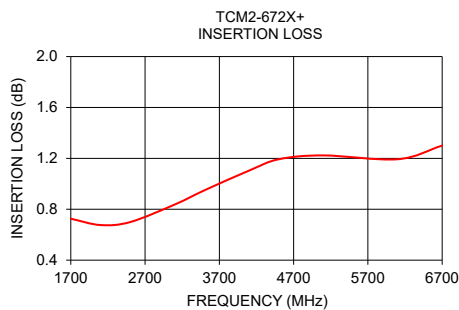

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers / Signal Transformers](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[749023020](#) [CU4S0506AT-2655-H1](#) [MET-58](#) [PE-64961](#) [H5008FNL](#) [H5020FNLT](#) [H5079NLT](#) [1879479-1](#) [1879564-1](#) [PA1277NLT](#)
[PA1528ANL](#) [PA2007NLT](#) [PA4309.154NLT](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#)
[HX1234NLT](#) [HX5008FNLT](#) [100B-1001XNL](#) [PA1282NLT](#) [HX5084FNL](#) [T1108NLT](#) [2-1879391-5](#) [TTC-266-2](#) [3-1879385-4](#) [PA1032NL](#)
[H2009FNLT](#) [PA0801NLT](#) [TTC-266](#) [X-1619](#) [SM51295PEL](#) [T5008NLT](#) [PE-68517T](#) [HX1294NLT](#) [PA4390.151HLT](#) [MGPWT-00339-P](#)
[HX5084FNLT](#) [H5015FNLT](#) [H6080NLT](#) [CX2024NL](#) [HX1294FNLT](#) [TX1473NLT](#) [PE-69011NLT](#) [CX2047LNLT](#) [CX2043LNLT](#) [H5120NLT](#)