

Surface Mount <sup>top hat®</sup>  
**RF Transformer**

**TCM3-452X+**

50Ω

20 to 4500 MHz

### The Big Deal

- Low insertion loss, 1.5 dB typ.
- Low unbalance, 0.2 dB, 2°
- Power handling up to 0.4W



CASE STYLE: DB1627

### Product Overview

Mini-Circuits TCM3-452X+ is a 50Ω surface mount balanced transmission line transformer with a 3:1 secondary/primary impedance ratio covering the 20 to 4500 MHz band. This model handles RF input power up to 0.4W and provides low insertion loss, good return loss, and low amplitude unbalance. Measuring only 0.16 x 0.15 x 0.16", the unit features core and wire, all-welded construction mounted on a six-lead plastic base. The unit also includes Mini-Circuits' Top Hat® feature for faster, more accurate pick-and-place assembly.

### Key Features

Feature	Advantages
Wideband, 20 to 4500 MHz	Supports a variety of applications including PCS, SatCom and more.
Power Handling up to 0.4W	Supports a variety of RF input power requirements.
Low insertion loss, 1.5 dB	Enables excellent signal power transmission from input to output.
Low unbalance <ul style="list-style-type: none"><li>• 0.5 dB amplitude unbalance</li><li>• 4° phase unbalance</li></ul>	Produces nearly equal output signals, ideal for parallel path / multichannel systems.
Small footprint, 0.16 x 0.15"	Accommodates tight space requirements for dense PCB layouts.
Top Hat® feature	Improves speed and accuracy of pick and place assembly and provides clear device marking for visual inspection

Surface Mount  **RF Transformer**

**TCM3-452X+**

50Ω

20 to 4500 MHz



Generic photo used for illustration purposes only

CASE STYLE: DB1627

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

**Features**

- wide bandwidth 20 to 4500 MHz
- balanced transmission line
- good return loss
- aqueous washable


**Applications**

- PCS
- wideband push-pull amplifiers
- cellular

**Electrical Specifications at 25°C**

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
<b>Impedance Ratio</b> (secondary/primary)			3		
<b>Frequency Range</b>		20	—	4500	MHz
<b>Insertion Loss</b>	20 - 4500	—	1.5	3.0	dB
<b>Amplitude Unbalance</b>	20 - 4500	—	0.5	—	dB
<b>Phase Unbalance</b>	20 - 4500	—	4	—	Degree

**Electrical Schematic**

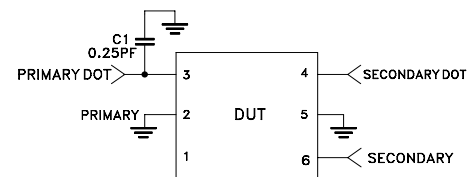

**Maximum Ratings**


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.4W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.


**Pin Connections**

Function	Pin Number
PRIMARY DOT	3
PRIMARY	2
SECONDARY DOT	4
SECONDARY	6
GND	2,5
NOT USED	1


**Internal Optional Product Marking**



**Config. H**




## Outline Drawing

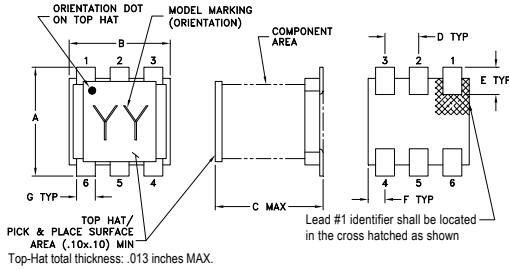


## Outline Dimensions (inch mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

## PCB Land Pattern



## Demo Board MCL P/N: TB-697+ Suggested PCB Layout (PL-381)




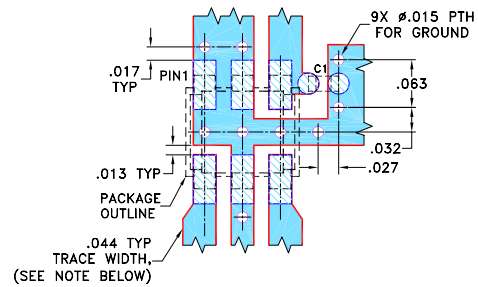


- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
 3. 0402 SIZE CHIP COMPONENT FOOTPRINT IS SHOWN FOR REFERENCE. FOR COMPONENT VALUE REFER TO TB-697+.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Input R. Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (Deg.)
10	1.58	11.11	0.01	0.07
500	1.39	12.51	0.03	3.37
1000	1.32	12.58	0.09	5.92
1500	1.31	12.44	0.14	7.91
2000	1.30	13.27	0.17	9.03
2500	1.30	15.62	0.18	8.53
3000	1.32	17.66	0.21	8.24
3500	1.38	17.99	0.46	6.49
4000	1.56	17.66	0.67	3.78
4500	1.67	18.98	0.76	4.17

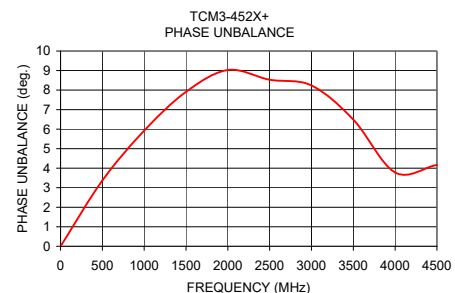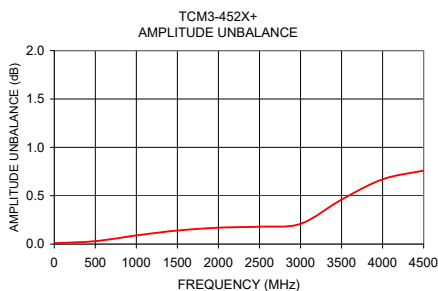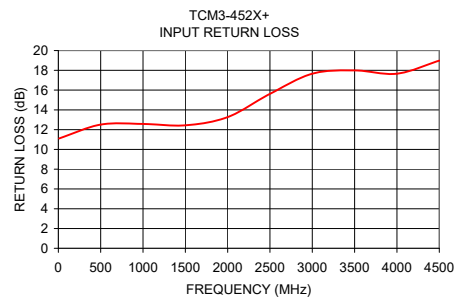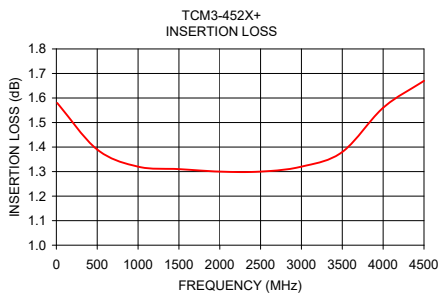

### Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Transformers / Signal Transformers](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)  
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)  
[1879732-1](#) [2-1879391-5](#)