

ASK TRANSMITTER 50 Ω Output

433.92 MHz – 3 V version / Cod. 3-2000554

DESCRIPTION:


ASK Transmitter, with crystal locked oscillator, manufactured in SMT technology on printed circuit. Booster stage to improve output power.

HIGHLIGHTS:


High output power with low supply voltage. Developed according to I-ETS 300 220 and ETS 300 683 European Standard.

APPLICATIONS:

Domestic Security, Surveillance Systems, Data Transmission, perfect for battery supply systems.

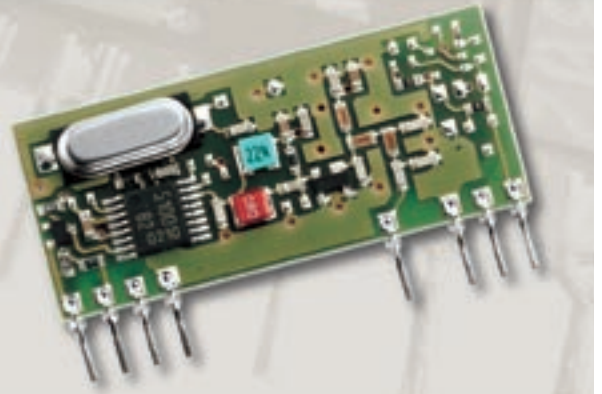

MECHANICAL CHARACTERISTICS

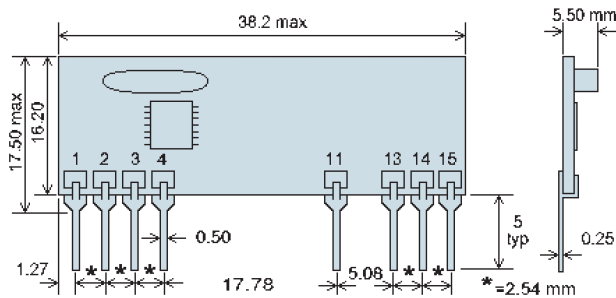

Pin functions

- 1 = GND
- 2 = Tx DATA
- 3 = NOT CONNECTED
- 4 = GND
- 11 = RF OUTPUT (50Ω)
- 13 = GND
- 14 = NON CONNECTED
- 15 = +Vcc

ABS. MAX. RATINGS

Power Supply, +Vcc, pin 15:	+ 4 Volt
Storage Temperature:	- 40 ÷ + 100 °C
Operating Temperature:	- 20 ÷ + 70 °C

ELECTRICAL CHARACTERISTICS AT 25 °C :

Parameter	Min.	Tip.	Max	Unit	Notes
Power Supply (+Vcc)	2.4	3	3.6	Volt	
Supply Current	-	15	-	mA	Note 1
Carrier Frequency	433.42	433.92	434.42	MHz	
Output Power (50Ω load)	+10	+12	-	dBm	Note 1
Second Harmonic Level (load 50Ω)	-	-	-36	dBm	
Start-up Time	-	-	1.5	ms	Note 1
Logic Low	-	0	-	Volt	
Logic High	-	3	-	Volt	
Baud Rate	-	-	38400	Baud	

Note 1: +Vcc = 3V, 1 kHz square wave modulation 0-3 V, duty-cycle 50%

Note 2: power supply versions from 5V to 12V are available on request

MIPOT S.P.A.

Via Corona, n.5

(Zona Ind.)

34701 Cormons (GO)

Italy

Tel. +39 0481 630200 ra.

Fax +39 0481 62387

mipot@mipot.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Transceiver](#) category:

Click to view products by [Mipot](#) manufacturer:

Other Similar products are found below :

[ATA5428C-PLQW-1](#) [ATA8520-GHPW](#) [XR1019-QH-0G0T](#) [AX5043-1-TW30](#) [MAX7043EUI](#) [ATA5428C-PLQW-1](#) [MAX2510EEI+T](#)
[AX5051-1-TW30](#) [ADRV9026-HB/PCBZ](#) [ADRV9026-MB/PCBZ](#) [BGT24LTR22E6327XTSA1](#) [ADL6316ACCZ](#) [ADL6316ACCZ-R7](#)
[ADL6317ACCZ](#) [SX1268DVK1GAS](#) [MC13213R2](#) [CC1260RGZT](#) [NRF51822-CEAA-R \(E0\)](#) [CC2590RGVR](#) [USB3317-GJ-TR](#) [USB3311-GJ-](#)
[TR](#) [MAX7030HATJ+T](#) [MAX2831ETM+](#) [MAX2830ETM+](#) [MAX2829ETN+](#) [MAX2828ETN+](#) [BH1406KV-E2](#) [SX1232BIMLTRT](#) [XBP24-](#)
[API-080](#) [ADF7242BCPZ-RL](#) [MAX2831ETM](#) [S2-LPQTR](#) [MAX7037EGL+](#) [ESP32-D0WDQ6](#) [ESP8266EX](#) [TRF2443IPFP](#) [CC8530RHAR](#)
[ADF7021-NBCPZ-RL](#) [CC1201RHBR](#) [TLE9221SXXUMA2](#) [TC35675XBG-001\(EL\)](#) [DA14585-00000AT2](#) [SX1281IMLTRT](#) [TC35661SBG-](#)
[501,EL](#) [ADS62PF49IRGCT](#) [TC32306FTG,EL](#) [NRF51822-QFAC-R](#) [CC1310F128RHBR](#) [AT86RF215IQ-ZUR](#) [A7108](#)