

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1200390003](#)
Status: **Active**
Overview: [Brad Micro-Change \(M12\) Connectors](#)
Description: Micro-Change DeviceNet Female Terminator, 5 Pole with LEDs

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Field Attachable / Accessories
Series	120039
IP Rating	IP67
Material - Contact	Copper Alloy
Overview	Brad Micro-Change (M12) Connectors
Product Name	DeviceNet, Micro-Change (M12)
Type	Terminator
UPC	78678810658

Physical

Cable Diameter	N/A
Coupling Type	Internal Thread
Diagnostics / LEDs	Yes
Diagnostics Port	No
Gender	Female
Keyway	Single
Material - Connector Body	PVC
Material - Coupling Nut	Black Epoxy Coated Zinc
Material - Plating Mating	Gold
Net Weight	14.000/kg
Orientation	Straight
Poles	5
Temperature Range - Operating	0°C to +60°C
Wire Size AWG	N/A

Electrical


Current - Maximum per Contact	4.0A
Voltage - Maximum	30V DC

Material Info

Engineering Number	DND150L
--------------------	---------

Reference - Drawing Numbers

Sales Drawing	SD-120039-002-001
---------------	-------------------

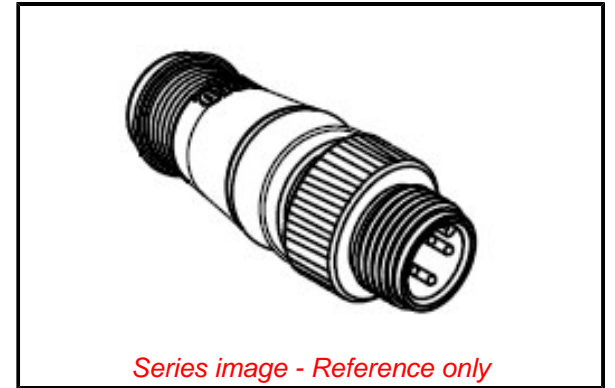

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Not Relevant

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Not Relevant

Compliant

Not Contained

Search Parts in this Series

[120039 Series](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#)
[RF-12P1N8A90DU](#) [41-40011](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-](#)
[00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#)
[8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#)
[XS8A-0441](#)