

1.4



Step drills HSS, CBN ground, spiral fluted with split point

Point cut: work's specification with split point
DIN 1412 C
Point angle: 118°
Step angle: 90°
Ø-Tolerance: work's specification
Surface: bright
Right-hand cutting

The CBN ground and spiral flutes guarantee quiet running and high cutting performance. Especially the chip flow is optimized, so even long, non-breaking chips will be removed easily. The optimized chip flow protects the cutting edges and reduces built-up edges and cold weld marks. The cone makes it easier to withdraw the tool from the material. Step height 2 mm. **Ideal to produce switchboards.**

Packing unit: in plastic tubes of 1

Size no.	Drilling range mm	Total length mm	Steps	Shank-Ø mm	Article no.	Price / each €
0/9k	4,0 - 12,00	48	9	6	101 061	
1k	4,0 - 20,00	58	9	8	101 062	
2k	4,0 - 30,00	72	14	10	101 063	

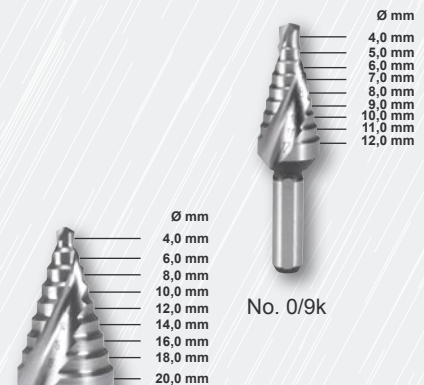



Step drills HSS, CBN ground, spiral fluted with split point for metric cable connections, through holes after DIN/EN 50262

Point cut: work's specification with split point
DIN 1412 C
Point angle: 118°
Step angle: 90°
Ø-Tolerance: work's specification
Surface: bright
Right-hand cutting

The CBN ground and spiral flutes guarantee quiet running and high cutting performance. Especially the chip flow is optimized, so even long, non-breaking chips will be removed easily. The optimized chip flow protects the cutting edges and reduces built-up edges and cold weld marks. The cone makes it easier to withdraw the tool from the material. Step height 4 mm.

Packing unit: in plastic tubes of 1

Size no.	Drilling range mm	Total length mm	Steps	Shank-Ø mm	Article no.	Price / each €
15	6,5 - 32,5	79	9	10	101 092	
17	6,5 - 40,5	96	11	10	101 090	

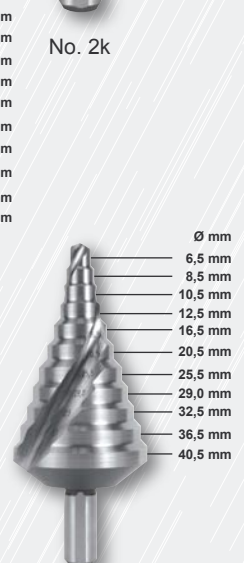


Step drills HSS, CBN ground, spiral fluted with split point for metric cable connections, core holes after DIN/EN 60423

Point cut: work's specification with split point
DIN 1412 C
Point angle: 118°
Step angle: 90°
Ø-Tolerance: work's specification
Surface: bright
Right-hand cutting

The CBN ground and spiral flutes guarantee quiet running and high cutting performance. Especially the chip flow is optimized, so even long, non-breaking chips will be removed easily. The optimized chip flow protects the cutting edges and reduces built-up edges and cold weld marks. The cone makes it easier to withdraw the tool from the material. Step height 4 mm.

Packing unit: in plastic tubes of 1

Size no.	Drilling range mm	Total length mm	Steps	Shank-Ø mm	Article no.	Price / each €
14	5,3 - 30,5	79	9	10	101 093	
16	5,3 - 38,5	96	11	10	101 091	

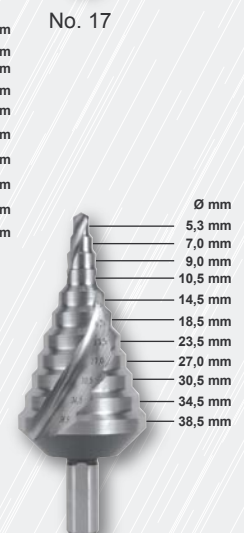

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ruko](#) manufacturer:

Other Similar products are found below :

[208040](#) [217-050](#) [214218](#) [214047](#) [202032E](#) [202040E](#) [102-116](#) [102143](#) [102302E](#) [237020](#) [242-207](#) [106302](#) [A102156](#) [109200](#) [109254](#) [107-010](#) [242-205](#) [237-060](#) [230080](#) [102771](#) [102785](#) [244200](#) [244203](#) [A215215RO](#) [A245058TX](#) [A245040](#) [101001](#) [217-025](#) [214063](#) [205223](#) [202042E](#) [214066](#) [214130](#) [217-040](#) [102111E](#) [102119E](#) [101051](#) [101063](#) [237-030](#) [A101032](#) [231-040](#) [116047](#) [A250214TRO](#) [214215](#) [214805](#) [214214](#) [214061](#) [214058](#) [214059](#) [214217](#)