

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1200710082](#)
Status: **Active**
Overview: Brad Micro-Change (M12) Connectors
Description: Micro-Change (M12) Field Attachable Connector, 8 Poles, Straight, Male, Shielded, Screw Termination, Cable Diameter 6.00-8.00mm

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Field Attachable / Accessories
Series	120071
Approvals	cRUus - UL Recognized
IP Rating	IP67
Material - Contact	Brass
Overview	Brad Micro-Change (M12) Connectors
Product Name	Micro-Change (M12)
Type	Field Attachable Connector
UPC	889056417624

Physical

Cable Diameter	6.00-8.00mm (.236-.315")
Coupling Type	External Thread
Diagnostics / LEDs	No
Diagnostics Port	No
Gender	Male
Keyway	Single
Material - Connector Body	Zinc Die-Cast
Material - Coupling Nut	Brass
Material - Plating Mating	Gold
Net Weight	42.000/g
Orientation	Straight
Poles	8
Temperature Range - Operating	-40°C to +85°C
Wire Size AWG	20

Electrical


Current - Maximum per Contact	2.0A
Voltage - Maximum	30V

Material Info

Engineering Number	8A8S06-32
--------------------	-----------

Reference - Drawing Numbers

Sales Drawing	1200710082-000
---------------	----------------

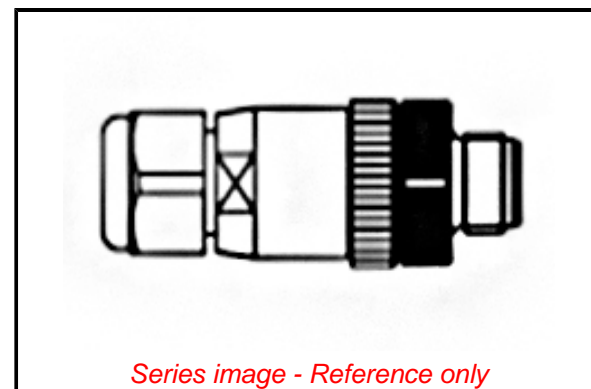

EU ELV

Not Relevant

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

CUST_NOTE	*Product contains part(s) with customer managed
CUST_NOTE1	EHS data. These part(s) are excluded from
CUST_NOTE2	product compliance status evaluation.
China ROHS	50 Image
ELV	Not Relevant
RoHS Phthalates	Not Reviewed

Search Parts in this Series

[120071](#) Series

Mates With

[1200710083](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#)
[RF-12P1N8A90DU](#) [41-40011](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-](#)
[00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#)
[8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#)
[XS8A-0441](#)