

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1200750019](#)  
**Status:** **Active**  
**Overview:** Brad Micro-Change (M12) Connectors  
**Description:** Micro-Change (M12) Dual Keyway with PG7 Cable Fitting, 90° Angle Male, 3 Poles, Cable Diameter 3.30-6.60mm

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Field Attachable / Accessories
Series	<a href="#">120075</a>
Approvals	N/A
IP Rating	IP67
Material - Contact	Brass
Overview	<a href="#">Brad Micro-Change (M12) Connectors</a>
Product Name	Micro-Change (1/2" - 20 UNF)
Type	Field Attachable Connector
UPC	78678830720

**Physical**

Cable Diameter	3.30-6.60mm (.130-.260")
Coupling Type	External Thread
Diagnostics / LEDs	No
Diagnostics Port	No
Gender	Male
Keyway	Dual
Material - Connector Body	PA
Material - Coupling Nut	Nickel-plated Brass
Material - Plating Mating	Gold
Net Weight	24.493/g
Orientation	90° Angle
Poles	3
Temperature Range - Operating	-25°C to +90°C
Wire Size AWG	18

**Electrical**


Current - Maximum per Contact	4.0A
Voltage - Maximum	250V AC / 300V DC

**Material Info**

Engineering Number	7A3007-31
--------------------	-----------

**Reference - Drawing Numbers**

Sales Drawing	SD-120075-006
---------------	---------------

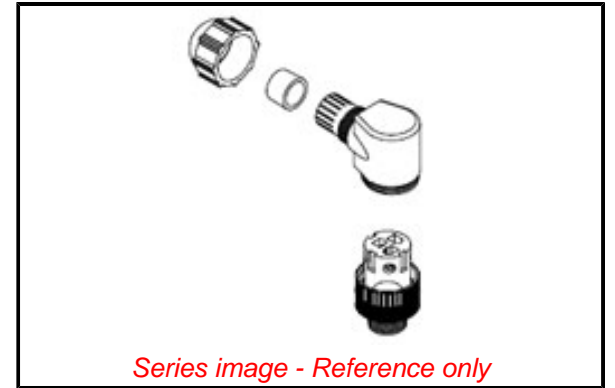

**EU ELV**

**Not Relevant**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Reviewed**

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Relevant

RoHS Phthalates

Not Reviewed

**China RoHS**

**Search Parts in this Series**

[120075 Series](#)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1604232](#)  
[1R3006A20M005](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01088](#) [43-01203](#) [41-](#)  
[40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)  
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#) [XS2RD4265](#)  
[XS2R-D426-1](#)