

- High Efficiency
- 5 in x 3 in / 6 in x 3 in footprint
- No minimum load
- Fits 1U applications
- 400/530 Watts peak power for 10 seconds
- 5 Year Warranty



Scan here for product page

EFE300 / EFE400

300/400 Watts, Ultra High Density AC-DC, digital power solution

Key Market Segments & Applications

Instrumentation	Broadcast
Automation	ATE
Security	Industrial Computing
Network Servers/Routers	Lifesciences/Laboratory

Features and Benefits

Features

- Full Digital Control
- High Efficiency
- Low Profile

Benefits


- Improves Product Performance
- Minimises heat in system
- Fits 1U applications

INPUT			
Input Voltage	90 - 264Vac / 120 - 350Vdc	Input Frequency	45 - 63Hz (440Hz with reduced PFC - consult factory)
Input Harmonics	EN61000-3-2 compliant	Power Factor	0.97 typical
Input Fuse	Dual fuses (Live + Neutral) Fast acting (not user accessible)	Inrush Current at 25°C and 230Vac	<20A for EFE300, <30A for EFE400 (cold start) (meets EN61000-3-3)
Earth Leakage Current	410µA at 120Vac (60Hz), 858µA max at 240Vac (60Hz) Worst case leakage current is less than 1.0mA at 264Vac, 63Hz (normal condition, 1.8mA Single Fault Condition)		

QUICK SELECTOR (Standard models). Additional variants available - see below

Output		Units without fan		Units with end fan
		Open Frame	Cover + Chassis	Cover + Chassis
12V / 25A	Description	EFE300-12-CNMD5	EFE300-12-CCMDS	EFE300-12-ECMDS
	Order code	U2Y002G	U2Y001F	U2Y003H
24V / 12.5A	Description	EFE300-24-CNMD5	EFE300-24-CCMDS	EFE300-24-ECMDS
	Order code	U2Y005K	U2Y004J	U2Y006L
12V / 33.3A	Description	EFE400-12-CNMD5	EFE400-12-CCMDS	EFE400-12-ECMDS
	Order code	U4Y002H	U4Y001G	U4Y003J
24V / 16.7A	Description	EFE400-24-CNMD5	EFE400-24-CCMDS	EFE400-24-ECMDS
	Order code	U4Y005L	U4Y004K	U4Y006M

HOW TO CREATE A PRODUCT DESCRIPTION

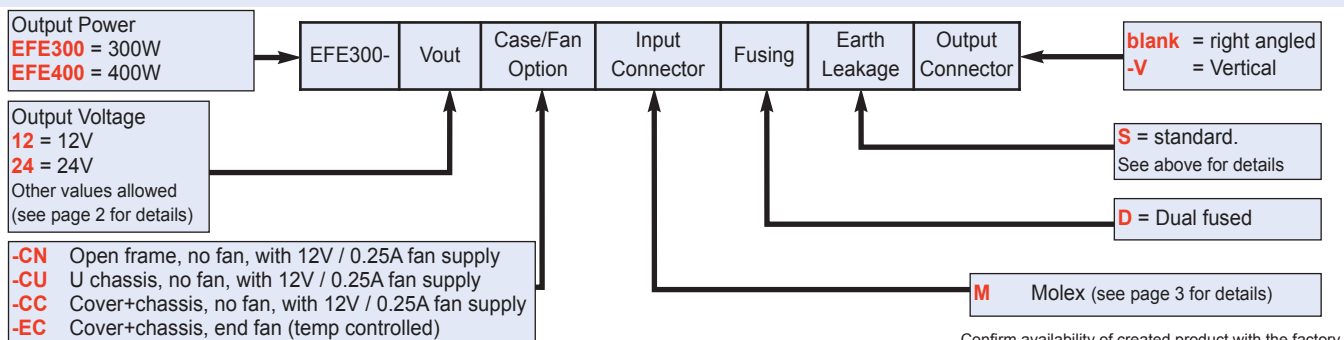

ISOLATION			
Input to Output	Reinforced	3kV (ac), 4.3kV (dc)	
Input to Earth	Basic	1.5kV (ac), 2.3 kV (dc)	Output to Earth 200 V (dc)

OUTPUT SPECIFICATION			
	EFE300	EFE400	
Output Power	300W	400W	Continuous
Peak Power	400W	530W	for 10 seconds (300W RMS for EFE300, 400W RMS for EFE400)
Total Regulation	better than 4% Including Line (for 90-264Vac input change), Load (for 0-100% load change) and temperature (0-50°C)		
Ripple & Noise	1.5% pk-pk, using EIAJ test method & 20MHz bandwidth		
Voltage Setting Range	+10% / -5% To be specified at time of ordering (chosen in 'Output Voltage' part of product code)		
Voltage Setting Accuracy	±1% at 50% load		
Turn on Time	1.5s typical at 90 Vac & 100% rated output power		
Efficiency	90% typical		
Hold up	16ms typical at 90 Vac, 75% load		
Min Load	None		
Transient Response	<5% of set voltage for 50% load change (in 50µs within the range 25 - 100% load)		
Recovery	<1ms for recovery to 2% of set voltage		
Short circuit protection	Yes Auto recovery after removal of short circuit		
Over Temperature protection	Yes Primary - auto recovers, secondary - cycle power to restart		
Over Voltage Protection	Yes Latching, need to cycle ac to restart unit.		
Fan supply	12V / 250mA Available if 'no fan' is specified, otherwise used by PSU fan. No access to connector with -CC (cover + chassis) variant.		

ENVIRONMENT	
Temperature	0°C to 50°C operational, -40°C to 70°C storage (max 12 months). Full load, with 2m/s air blown from input to output (approximately 10CFM)
Derating	50°C to 70°C derate each output by 2.5% per °C
Low Temp Startup	-20°C
Humidity	5 - 95% RH non condensing
Shock	±3 x 30g shocks in each plane, total 18 shocks 30g shock = 11ms (+/-0.5msec), half sine Conforms to EN60068-2-27, EN60068-2-47, IEC68-2-27, IEC68-2-47, JIS C0041-1987. Conforms to MIL-STD-810E/F, Method 516.5, Pro I, IV, VI
Vibration	Single axis 10 - 500 Hz at 2g (sweep and endurance at resonance) in all 3 planes Conforms to EN60068-2-6, IEC68-2-6 Conforms to MIL-STD-810E, Method 514.4, Pro I, Cat 1,9
Altitude	-200 to 3,000 metres operational (-200 to 5000m storage/transportation)
Pollution	Degree 2, Material group IIIb

IMMUNITY EN61000-6-2:2005				Criteria
Electrostatic Discharge	EN61000-4-2	Level 4	Air discharge 15kV Contact discharge 8kV Not applicable to open frame units	A
Electromagnetic Field	EN61000-4-3	Level 3	12V/m	A
Fast / Burst Transient	EN61000-4-4	Level 4	ac input tested to 4.4kV dc output tested to 2.2kV	A
Surge Immunity	EN61000-4-5	Level 3	Common mode - 2.2kV Differential - 1.1kV	A
Conducted RF Immunity	EN61000-4-6	Level 3	12V	A
Power Frequency Magnetic Field	EN61000-4-8	Level 4	30A/m	A
Voltage Dips, Variations, Interruptions	EN61000-4-11	Class 3	Criteria B for 5 sec interruption EFE-300, criteria B for 1 cycle interruption	A
Ring Wave	EN61000-4-12	Level 3	Common mode - 2.2kV Differential - 1.1kV	A
Voltage Fluctuations	EN61000-4-14	Class 3		A

EMISSIONS EN61000-6-3:2007, EN60601-1-2:2001		
Radiated Electric Field	EN55011, EN55022	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B see application note for details
Conducted Emissions	EN55011, EN55022	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B
Conducted Harmonics	EN61000-3-2	Class A Class C (EFE300 at 100W and above, EFE400 at 200W and above)
Flicker	EN61000-3-3	Compliant - d_{max} only

SAFETY APPROVALS					
	Date	Comments		Date	Amendments
EN 60950-1	2006		IEC 60950-1*	2005	
UL 60950-1	2007	File E135494-A31/A33	CSA 22.2 No 60950-1	2007	
EN 61010-1	2001		IEC 61010-1*	2001	
CE Mark	LV Directive 2006/95/EC (EN60950-1)				
* CB certificate and Report available on request			Check with factory for status of approvals		

OUTLINE & CONNECTION DRAWINGS (not -V version)

Note connection details and outline drawings for -V (vertical) connector are different. See handbook for details

EFE-300

NOTE:
A 4 OFF HOLES $\geq 3.5\text{mm}$ CLEARANCE FOR M3 FIXINGS.
B 8 OFF FIXING HOLES FOR M3, MAXIMUM PENETRATION 4.5mm, MAXIMUM TORQUE 0.9Nm.
ALL TOLERANCES $\pm 0.5\text{mm}$.

Connectors are not included with the product. They are available from TDK-Lambda

1 off input connector and 3 crimps are available as part number is 94910.
1 off output connector and 10 crimps are available as part number 94750.

EFE-400

NOTE:
A 4 OFF HOLES $\geq 3.5\text{mm}$ CLEARANCE FOR M3 FIXINGS.
B 8 OFF FIXING HOLES FOR M3, MAXIMUM PENETRATION 4.5mm, MAXIMUM TORQUE 0.9Nm.
ALL TOLERANCES $\pm 0.5\text{mm}$.

Connectors are not included with the product. They are available from TDK-Lambda

1 off input connector and 3 crimps are available as part number is 94910.
1 off output connector and 14 crimps are available as part number 94751.

Notes 1. All customer fixings M3 2. Maximum Penetration 4.5mm 3. Maximum torque 0.9Nm 4. All tolerances $\pm 0.5\text{mm}$

TDK-LAMBDA EMEA

www.emea.tdk-lambda.com



TDK-Lambda France SAS

Route de Grivery
ZAC des Delaches
CS 41077
91978 Courtaboeuf Cedex
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office
Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



Nemic Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@nemic.co.il
www.nemic.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
Tel: +7 (499) 7557732
info@tdk-lambda.ru
www.tdk-lambda.ru

LOCAL DISTRIBUTION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tdk-lambda](#) manufacturer:

Other Similar products are found below :

[CSS500-57/S](#) [CUS200M18](#) [FPST1U](#) [PH150S110-15](#) [PH300S280-3.3](#) [PH50A280-48](#) [PH75A280-5](#) [PV1R5-12-5](#) [PV1R5-5-12](#) [PXA15-24WS3P3NT](#) [PXB15-24D05/N](#) [PXB15-48S12/NT](#) [PXB15-48WD15/N](#) [PXCM1048WD15A](#) [PXD1024WS15](#) [PXD1524D12](#) [PXD1524D15](#) [PXD1524S05](#) [PXD1524S12](#) [PXD1548D12](#) [PXD2024S3P3](#) [PXE2024WS12](#) [PXF4012D12](#) [PXF4024WD12](#) [PXF4048S05](#) [PXF4048T0515](#) [PXF4048WS15](#) [PXF6048S05](#) [GWS500-48](#) [HFE2500-S1U-TB](#) [DRJ30-12-1](#) [DRJ50-12-1](#) [DT100PW120C](#) [DT150PW480C](#) [DTM165PW150C](#) [1500-FAN-01](#) [MWS6515](#) [NL200](#) [HWS1000-12](#) [HWS1000-24](#) [HWS1000-48](#) [HWS1000-60](#) [HWS100A-24/A](#) [HWS100A3HD](#) [HWS100A48HD](#) [HWS100A-5](#) [HWS150036ME](#) [HWS150-12/ME](#) [HWS150A48HD](#) [HWS15A-3/A](#)