


Ferrules INSULATED (INDUSTRIAL STANDARD)

French Code <Polypropylene insulated and tin-plated electrolytic copper>

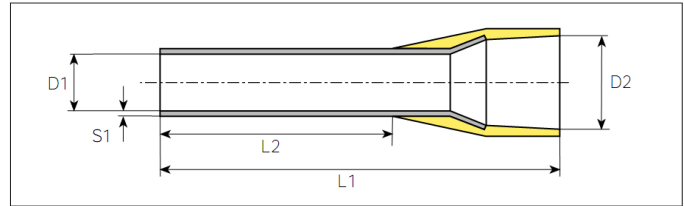

DIN 46228, part 4, except #


| Model No. | Applicable wire | | Style | Colour Code | Dimensions (mm) | | | | |
|-------------|-----------------|-----|-------|-------------|-----------------|----|------|------|------|
| | mm2 | AWG | | | L1 | L2 | D1 | S1 | D2 |
| FWE0.25-6 | 0.25 | 24 | II | Violet | 11 | 6 | 0.8 | 0.15 | 1.9 |
| FTR0.5-8 | 0.50 | 20 | II | White | 14 | 8 | 1 | 0.15 | 2.6 |
| FTR0.75-8 # | 0.75 | 18 | I | Light Blue | 14 | 8 | 1.2 | 0.15 | 3.2 |
| FTR1.0-8 # | 1.00 | 18 | I | Red | 14 | 8 | 1.4 | 0.15 | 3.4 |
| FTR1.5-8 # | 1.50 | 16 | I | Black | 14 | 8 | 1.7 | 0.15 | 3.8 |
| FWE2.5-8 | 2.50 | 14 | I | Grey | 14 | 8 | 2.2 | 0.15 | 4.2 |
| FWE4-10 | 4.00 | 12 | I | Orange | 17 | 10 | 2.8 | 0.2 | 4.8 |
| FWE6-12 | 6.00 | 10 | I | Green | 20 | 12 | 3.5 | 0.2 | 6.3 |
| FWE10-12 | 10.0 | 8 | I | Brown | 22 | 12 | 4.5 | 0.2 | 7.6 |
| FWE16-12 | 16.0 | 6 | II | White | 24 | 12 | 5.8 | 0.2 | 8.8 |
| FWE25-16 | 25.0 | 4 | I | Black | 30 | 16 | 7.3 | 0.2 | 11.2 |
| FWE35-16 | 35.0 | 2 | I | Red | 30 | 16 | 8.3 | 0.2 | 12.7 |
| FWE50-20 | 50.0 | 1 | I | Blue | 36 | 20 | 10.3 | 0.3 | 15 |

Note: 1) Style I - Suitable for Tri-rated cable, Style II - Standard

2) Maximum operating temperature: + 105°C

3) Delivery lead times may vary depending on the product. These products are **ONLY** available from the following JST affiliates; J.S.T. (U.K.) Ltd, J.S.T. Belgium N.V., J.S.T. India Liaison Office, and JST-SouthAfrica.com.

German Code <Polypropylene insulated and tin-plated electrolytic copper>

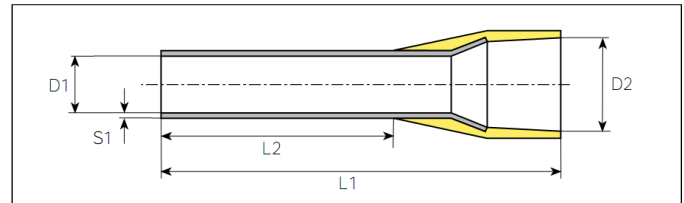

DIN 46228, part 4, except #

| Model No. | Applicable Wire | | Style | Colour Code | Dimensions | | | | |
|-------------|-----------------|-----|-------|-------------|------------|----|------|------|------|
| | mm2 | AWG | | | L1 | L2 | D1 | S1 | D2 |
| GWE0.25-6 | 0.25 | 24 | II | Light Blue | 11 | 6 | 0.8 | 0.15 | 1.9 |
| GTR0.5-8 | 0.50 | 20 | II | Orange | 14 | 8 | 1 | 0.15 | 2.6 |
| GTR0.75-8 # | 0.75 | 18 | I | White | 14 | 8 | 1.2 | 0.15 | 3.2 |
| GTR1.0-8 # | 1.00 | 18 | I | Yellow | 14 | 8 | 1.4 | 0.15 | 3.4 |
| GTR1.5-8 # | 1.50 | 16 | I | Red | 14 | 8 | 1.7 | 0.15 | 3.8 |
| GWE2.5-8 | 2.50 | 14 | I | Blue | 14 | 8 | 2.2 | 0.15 | 4.2 |
| GWE4-10 | 4.00 | 12 | I | Grey | 17 | 10 | 2.8 | 0.2 | 4.8 |
| GWE6-12 | 6.00 | 10 | I | Black | 20 | 12 | 3.5 | 0.2 | 6.3 |
| GWE10-12 | 10.0 | 8 | I | Ivory | 22 | 12 | 4.5 | 0.2 | 7.6 |
| GWE16-12 | 16.0 | 6 | II | Green | 24 | 12 | 5.8 | 0.2 | 8.8 |
| GWE25-16 | 25.0 | 4 | I | Brown | 30 | 16 | 7.3 | 0.2 | 11.2 |
| GWE35-16 | 35.0 | 2 | I | Beige | 30 | 16 | 8.3 | 0.2 | 12.7 |
| GWE50-20 | 50.0 | 1 | I | Olive | 36 | 20 | 10.3 | 0.3 | 15 |

Note: 1) Style I - Suitable for Tri-rated cable, Style II - Standard

2) Maximum operating temperature: + 105°C

3) Delivery lead times may vary depending on the product. These products are **ONLY** available from the following JST affiliates; J.S.T. (U.K.) Ltd, J.S.T. Belgium N.V., J.S.T. India Liaison Office, and JST-SouthAfrica.com.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [jst manufacturer](#):

Other Similar products are found below :

[GS3-0.5](#) [GS8-6](#) [B3B-ZR](#) [B4B-ZR](#) [B5B-XH-A](#) [B5B-ZR](#) [B6B-ZR-SM4-TF](#) [B7B-XH-A](#) [B8B-ZR](#) [BM02B-SRSS-TB](#) [BM06B-SRSS-TB](#)
[BM10B-SRSS-TB](#) [FVGS5-6](#) [B2B-ZR-SM4-TF](#) [B34B-PHDSS-B\(LF\)\(SN\)](#) [B3B-ZR-SM4-TF](#) [B5B-ZR-SM4-TF](#) [B6B-XH-A](#) [B7B-ZR-SM4-TF](#) [B8B-ZR-SM4-TF](#) [B8PS-VH](#) [BM04B-SRSS-TB](#) [BM05B-SRSS-TB](#) [IDH-KR-12](#) [10HR-4K](#) [WC-ZE2426](#) [WC-691](#) [WC-122](#) [FVDDF5.5-375A \(LF\)](#) [FVGS12-6 \(LF\)](#) [FVWS2-S3.3 \(LF\)](#) [FVWS5.5-5 \(LF\)](#) [B6PS-VH\(LF\)\(SN\)](#) [FNGS12-6](#) [TWE0.5-8](#) [FVGS4-1 \(LF\)](#) [WC-GVH2630](#)
[WC-PUD2](#) [S10B-PH-SM4-TB\(LF\)\(SN\)](#) [B2B-EH-A-TW \(LF\)\(SN\)](#) [B4B-EH-A-TW \(LF\)\(SN\)](#) [B4B-XH-TW \(LF\)\(SN\)](#) [B9B-XH-A](#) [BM02B-GHS-TBT](#) [BM03B-GHS-TBT](#) [BM04B-GHS-TBT](#) [BM06B-GHS-TBT](#) [BM08B-GHS-TBT](#) [BM10B-GHS-TBT](#) [10FPZ-SM-TF\(LF\)\(SN\)](#)