

cell type: NiMH
cell size: E-block

nominal voltage: 8.4 V
max. charge voltage: 10.5 V

capacity
 nominal: 200 mAh
 minimum: 200 mAh
 180 mAh

Conditions
 at standard charge (0.1C / 20°C)
 discharge at 0.2C
 discharge at 0.2C
 discharge at 1C
 7.0V end discharge voltage
 ta: 20°C

max. continuous discharge current: 400 mA
 ta: 0...45°C

charge
 standard charge: 20 mA 14...16hrs
 quick charge: 60 mA 4hrs
 fast charge: 200 mA 1.2hrs

recommended charge termination control parameters:
 15...35 mV - delta V
 120 % of nominal input
 by timer cut off

trickle charge current: 2...10 mA (recommended)

continuous overcharge: ≤ 20 mA
 (less than 1 year) no conspicuous deformation
 no leakage

internal resistance: ≤ 0.8 Ω
 (impedance) at 1KHz
 battery fully charged

life expectancy: ≥ 500 cycles acc. IEC standard

self discharge
 charge retention: ≥ 85 % after 6 months storage
 (at ≤ 20°C ambient) ≥ 80 % after 12 months storage

initial capacity: ≥140 mAh within 30 days after delivery
 discharge at 0.2C


ambient temperature range:

0...45 °C	standard charge
10...40 °C	fast charge
0...45 °C	discharge (≥1C)
- 20...65 °C	discharge (<1C)
- 20...50 °C	storage (≤3months)
- 20...40 °C	storage (≤6months)
- 20...30 °C	storage (≤24months)





QCT1: 20/180/750
QCT2: 30/170/800

mechanical specifications
 cell dimensions (incl. label)

Length L1:	26.5 - 2.0	mm
Length L2:	17.5 - 2.0	mm
Length L3:	12.7 ± 0.25	mm
height h1:	48.5 - 1.0	mm
weight:	41 ± 4	g
blister card dimensions:	123 x 85	mm
blister card weight (incl. batteries):	50	g

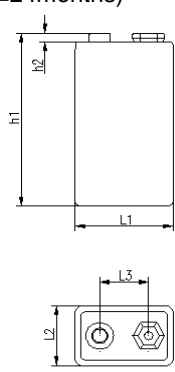

Diagrams

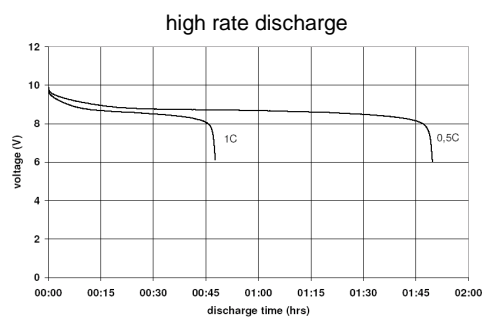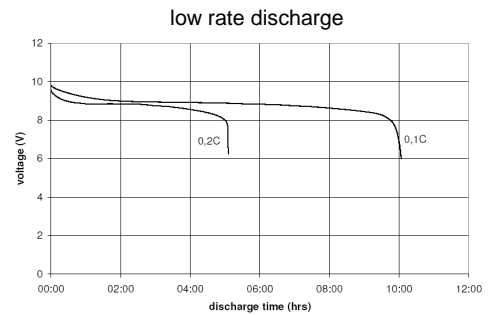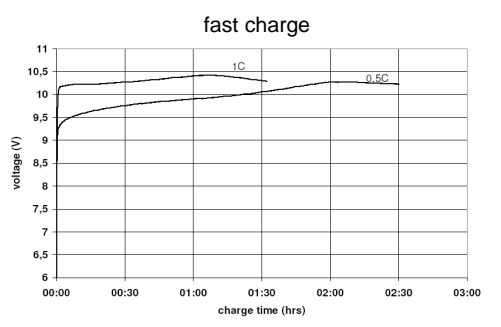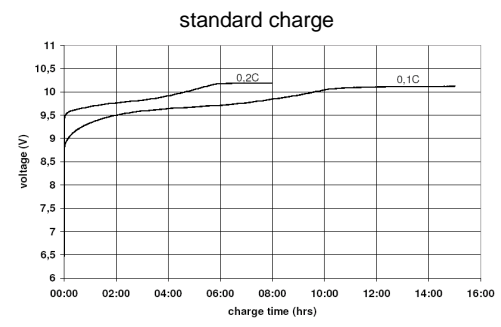

	ANSMANN Specifications for model:	9V-E-block 200mAh low self discharge 1pc blister package
	data sheet no. / part no.	5035342
	supplier no.	702069
	author / date	Gramlich / 03.03.2012

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ansmann](#) manufacturer:

Other Similar products are found below :

[5020012](#) [1000-0003](#) [5013233](#) [5030992](#) [1520-0004](#) [1501-0004-1](#) [1001-0020-UK](#) [2312-3003](#) [1250-0013](#) [1600-0199](#) [5030902](#) [1900-0019](#)
[1001-0014-UK](#) [5035362](#) [5013243](#) [5707173](#) [1600-0137](#) [5035391](#) [5000023](#) [5311113 / APS 1000](#) [1600-0138](#) [1250-0014](#) [BCA120-350](#) [1600-0145](#) [5015293](#) [5030982](#) [2311-3003](#) [5030802](#) [10950964/01](#) [5030912](#) [5016243](#) [5035222](#) [2310-3001](#) [5030641](#) [5001183](#) [1600-0154](#) [5035352](#)
[5035342](#) [ACS310](#) [5035202](#) [5015332](#) [5035201](#) [5015303](#) [2311-3002](#)