

MSKSEMI

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT





PLED

Product data sheet

200 mW SOD-882 Surface Mount

This series of Zener diodes is packaged in a SOD-882 surface mount package. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.



SOD-882

Specification Features:

- Standard Zener Breakdown Voltage Range – 2.4 V to 24 V
- Steady State Power Rating of 200 mW
- ESD Rating of Class 3 (>16 kV) per Human Body Model
- We declare that the material of product compliance with RoHS requirements and Halogen free.

Mechanical Characteristics:

CASE: Void-free, transfer-molded, thermosetting plastic
Epoxy Meets UL 94 V-0

LEAD FINISH: 100% Matte Sn (Tin)

MOUNTING POSITION: Any

QUALIFIED MAX REFLOW TEMPERATURE: 260°C

Device Meets MSL 1 Requirements

MAXIMUM RATINGS


Rating	Symbol	Max	Unit
Total Device Dissipation FR-5 Board, @ $T_A = 25^\circ\text{C}$	P_D	200	mW
Junction and Storage Temperature Range	T_J, T_{stg}	-65 to +150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

ELECTRICAL CHARACTERISTICS

($T_A = 25^\circ\text{C}$ unless otherwise noted,
 $V_F = 0.9\text{ V Max. @ } I_F = 10\text{ mA}$ for all types)

Symbol	Parameter
V_Z	Reverse Zener Voltage @ I_{ZT}
I_{ZT}	Reverse Current
Z_{ZT}	Maximum Zener Impedance @ I_{ZT}
I_{ZK}	Reverse Current
Z_{ZK}	Maximum Zener Impedance @ I_{ZK}
I_R	Reverse Leakage Current @ V_R
V_R	Reverse Voltage
I_F	Forward Current
V_F	Forward Voltage @ I_F
CV_Z	Maximum Temperature Coefficient of V_Z
C	Max. Capacitance @ $V_R = 0$ and $f = 1\text{ MHz}$

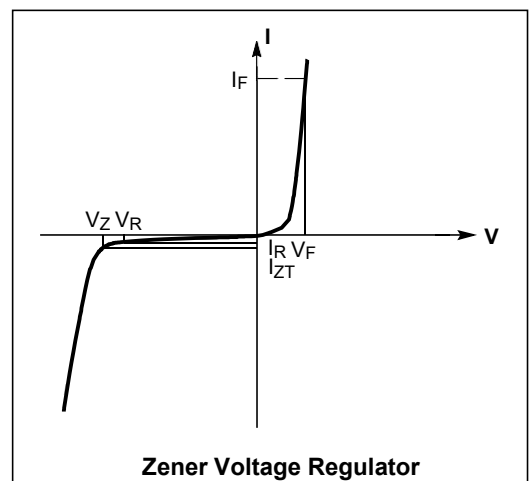

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 0.9\text{ V Max.}$ @ $I_F = 10\text{ mA}$ for all types)


P/N	Device Marking	Zener Voltage (Note 1)			Zener Impedance			Leakage Current		@V _Z (mV/k) @ I _{ZT}		C @ V _R = 0 f = 1 MHz pF
		V _Z (Volts)		@ I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}		I _R @ V _R		Min	Max	
		Min	Max	mA	f _i	f _i	mA	μA	Volts	Min	Max	
LNZ8F2V4T5G-MS	J*	2.28	2.52	5	100	1000	1	50	1	-3.5	0	210
LNZ8F2V7T5G-MS	E*	2.57	2.84	5	100	1000	1	20	1	-3.5	0	210
LNZ8F3V0T5G-MS	T*	2.85	3.15	5	100	1000	1	10	1	-3.5	0	210
LNZ8F3V3T5G-MS	Q*	3.14	3.47	5	100	1000	1	10	1	-3.5	0	210
LNZ8F3V6T5G-MS	3*	3.42	3.78	5	100	1000	1	10	1	-3.5	0	210
LNZ8F3V9T5G-MS	V*	3.71	4.10	5	100	1000	1	5	1	-3.5	-2.5	210
LNZ8F4V3T5G-MS	Y*	4.09	4.52	5	100	1000	1	5	1	-3.5	0	210
LNZ8F4V7T5G-MS	7*	4.47	4.94	5	100	800	0.5	2	1	-3.5	0.2	150
LNZ8F5V1T5G-MS	4*	4.85	5.36	5	80	500	0.5	2	1.5	-2.7	1.2	130
LNZ8F5V6T5G-MS	5*	5.32	5.88	5	60	200	0.5	1	2.5	-2.0	2.5	115
LNZ8F6V2T5G-MS	6*	5.89	6.51	5	60	100	0.5	1	3	0.4	3.7	110
LNZ8F6V8T5G-MS	A*	6.46	7.14	5	40	60	0.5	0.5	3.5	1.2	4.5	105
LNZ8F7V5T5G-MS	D*	7.13	7.88	5	30	60	0.5	0.5	4	2.5	5.3	100
LNZ8F8V2T5G-MS	E*	7.79	8.61	5	30	60	0.5	0.5	5	3.2	6.2	90
LNZ8F9V1T5G-MS	F*	8.65	9.56	5	30	60	0.5	0.5	6	3.8	7	80
LNZ8F10VT5G-MS	J*	9.50	10.50	5	30	60	0.5	0.1	7	4.5	8	80
LNZ8F11VT5G-MS	K*	10.45	11.55	5	30	60	0.5	0.1	8	5.4	9	80
LNZ8F12VT5G-MS	L*	11.40	12.60	5	30	80	0.5	0.1	9	6	10	80
LNZ8F13VT5G-MS	P*	12.35	13.65	5	37	80	0.5	0.1	10	7	11	75
LNZ8F15VT5G-MS	Q*	14.25	15.75	5	42	80	0.5	0.1	11	9.2	13	70
LNZ8F16VT5G-MS	R*	15.20	16.80	5	50	80	0.5	0.1	12	10.4	14	65
LNZ8F18VT5G-MS	T*	17.10	18.90	5	50	80	0.5	0.1	14	12.4	16	60
LNZ8F20VT5G-MS	V*	19.00	21.00	5	55	100	0.5	0.1	15.4	14.4	18	55
LNZ8F22VT5G-MS	Y*	20.90	23.10	5	55	100	0.5	0.1	16.8	15.4	20	55
LNZ8F24VT5G-MS	S*	22.80	25.20	5	70	120	0.5	0.1	18.9	16.8	22	50

*Rotated 90°.

**Rotated 270°.


1. Zener voltage is measured with a pulse test current I_Z at an ambient temperature of 25°C .

PACKAGE MECHANICAL DATA

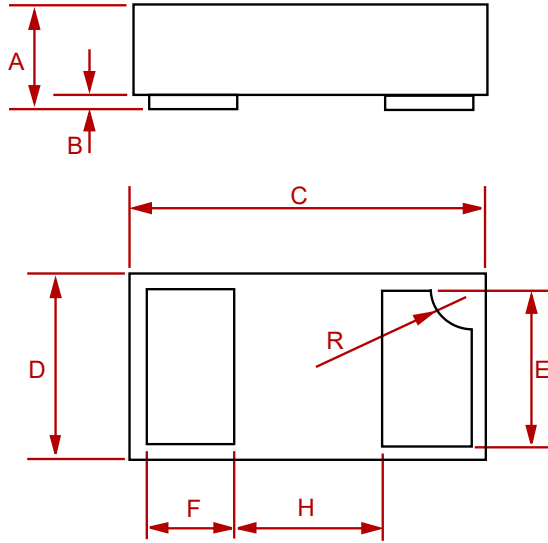

Dim	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.0125	0.02	0.32	0.52
B	0.000	0.002	0.00	0.05
C	0.037	0.043	0.95	1.080
D	0.022	0.027	0.55	0.680
E	0.016	0.024	0.40	0.60
F	0.008	0.012	0.20	0.30
H	0.015Typ.		0.40Typ.	
R	0.001	0.005	0.05	0.15

Suggested Pad Layout

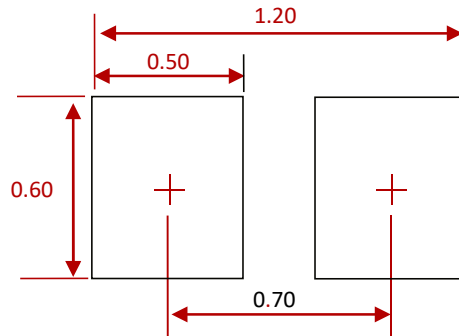

NOTES:

1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
2. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY. CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR COMPANY'S MANUFACTURING GUIDELINES ARE MET.

REEL SPECIFICATION

P/N	PKG	QTY
LNZ8FXXXT5G-MS	S0D-882	10000

Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringement of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [MSKSEMI](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [EDZTE6113B](#) [1N4682](#) [1N4691](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#)
[1N5369B](#) [1N747A](#) [1N959B](#) [1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [NTE5121A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5164A](#)
[JANS1N4974US](#) [1N4692](#) [1N4700](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4737A](#) [1N4745ARL](#) [1N4752A](#) [1N4752ARL](#) [1N4760ARL](#)
[1N5221B](#) [1N5236B](#) [1N5241BTR](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#) [3SMAJ5946B-TP](#)
[3SMAJ5950B-TP](#) [3SMBJ5925B-TP](#) [441774C](#) [BZX84C3V9](#)