



LFD212G45DP3A188

In Production Recommended RoHS REACH

Appearance & Shape



(1)(2)(3)(5)(7): GND
(4): P1(*2)
(6): P3(*3)
(8): P2(*1)

(*1) Lower Frequency Port
(*2) Higher Frequency Port
(*3) Common Port
Terminal of *NC* should be fixed to the no connected pattern.

All the technical data and information contained herein are subject to change without prior notice. (in mm)

Features

Adioplexer branching low and high band.

1. Low insertion loss.
2. Small size, low-profiled and light weight.
3. Absolutely no adjustment required.
4. Reflow solderable.

Packaging Information

Packaging	Specifications	Minimum Order Quantity
-	180mm Embossed Tape	4000

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

LFD212G45DP3A188



Specifications

Applications	WLAN BT	Thickness(max.)	1.0mm
Center Frequency{P1}(f1)	5375.00MHz		
Frequency Range{P1}(f1)	4900.00MHz to 5850.00MHz		
Center Frequency{P2}(f2)	2450.00MHz		
Frequency Range{P2}(f2)	2400.00MHz to 2500.00MHz		
Insertion Loss I){P1-P3 in f1}	0.75dB max. (at 25°C)		
Insertion Loss II){P1-P3 in f1}	0.85dB max. (-40 to +85°C)		
Insertion Loss I){P2-P3 in f2}	0.50dB max. (at 25°C)		
Insertion Loss II){P2-P3 in f2}	0.60dB max. (-40 to +85°C)		
Attenuation{P1-P3}(in f2)	21.0dB min.		
Attenuation{P2-P3}(in f1)	17.0dB min.		
VSWR{P1}(in f1)	1.80 max.		
VSWR{P2}(in f2)	1.70 max.		
VSWR{P3}(in f1,f2)	(f1)1.80 max., (f2)1.70 max.		
Power Capacity	3W		
Operating Temperature Range	-40°C to 85°C		
L x W (size)	2.00x1.25mm		

Attention


1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

LFD212G45DP3A188


Product Data

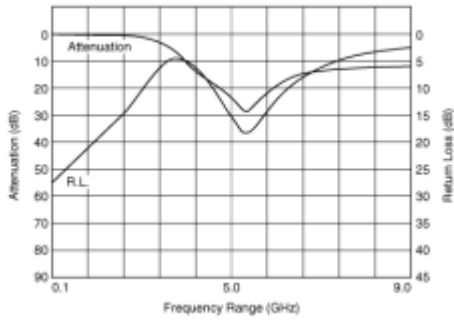


Attenuation(P2-P3), VSWR(P3)

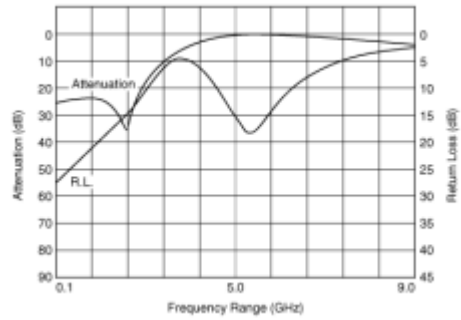

Attenuation(P1-P3), VSWR(P3)

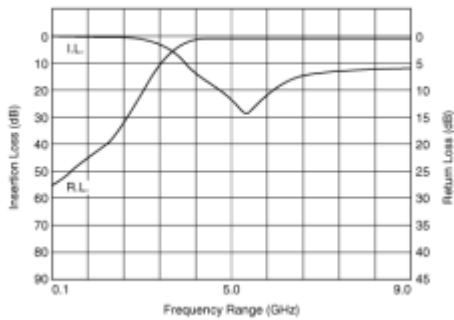

Insertion Loss(P2-P3), VSWR(P2)

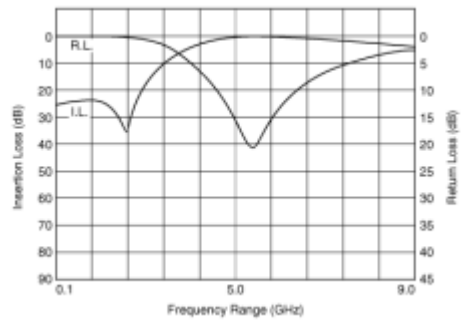

Insertion Loss(P1-P3), VSWR(P1)

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Murata](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)