


UMAL361421B024TA01

Discontinued

RoHS

REACH

Appearance & Shape



(in mm)

Features

Murata has developed a miniature device with a high energy storage capacity, low ESR, fast charging and discharging and the ability to withstand load fluctuations. It may be used as a secondary battery in the same way as a capacitor. This energy device achieves better charge/discharge characteristics and has an extended service life superior to conventional batteries. Well suited as a power supply for wearable devices or sensor nodes for wireless sensor networks, this device maintains flat voltage characteristics while accommodating a wide range of load characteristics.

1. High-rate charge/discharge*
Max. charge/discharge rate (current): 10 C (240 mA)
2. High safety
The highly safe design: Thermal runaway does not occur because of its small capacity and the use of chemically stable materials.
3. Extended service cycle life
Charge (capacity) recovery rate of 90% or higher after 5,000 cycles

*High-rate charge/discharge characteristics: The current rate at which the battery capacity is charged or discharged in one hour is defined as 1 C. As a description of battery performance, "high-rate charge/discharge characteristics" means that a large current relative to 1 C can be charged or discharged.

Packaging Information

| Packaging | Specifications | Standard Packing Quantity |
|-----------|----------------|---------------------------|
| T | Box | 500 |

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

UMAL361421B024TA01

Specifications


| | |
|-----------------------------|-----------------------|
| Nominal Voltage | 2.3V |
| Charge Voltage | 2.7V |
| Cut-off Voltage | 1.8V |
| Nominal Capacity | 24mAh |
| Max. Discharge Current | 240mA(10C) |
| ESR | 100mΩ |
| Operating Temperature Range | -20°C to 70°C |
| Size | 21mm×14mm×3.6mm(typ.) |

Attention


- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

UMAL361421B024TA01


Product Data

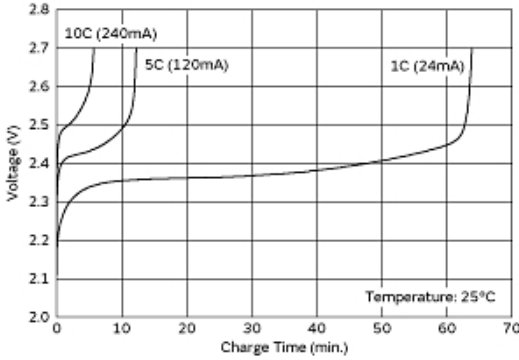


Charge Characteristic

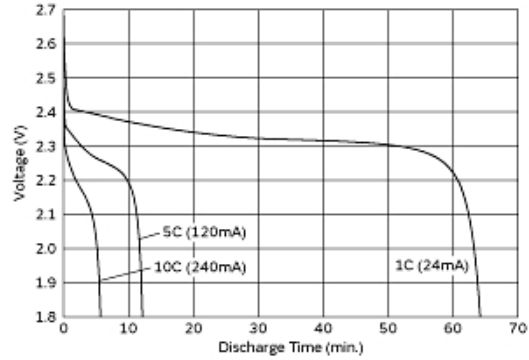

Discharge Characteristic

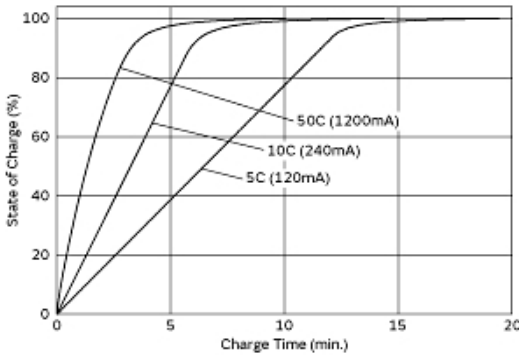

SoC/Charge Current Dependence

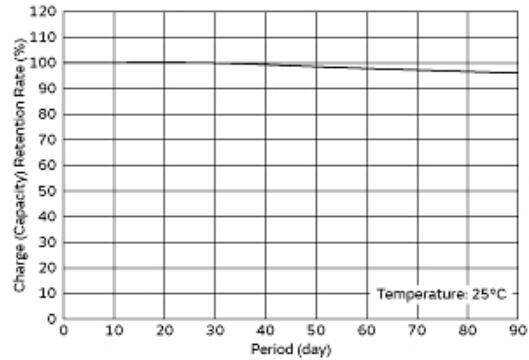

Charge(capacity) retention

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Electronic Battery](#) category:

Click to view products by [Murata](#) manufacturer:

Other Similar products are found below :

[R88A-BAT02W](#) [TL5902/T](#) [TL-5104/SBP](#) [E300781900](#) [E300782100](#) [1200297](#) [BR-435/BN](#) [B73180A0101M199](#) [13299-0001](#) [R88A-BAT01G](#) [R88A-BAT01W](#) [G4BATT32](#) [M4T32-BR12SH6](#) [LR03AD/4P](#) [13331-0001](#) [ER14505](#) [ER14250](#) [3G2A9BAT08](#) [LR03AD/B](#)
[LR20AD/B](#) [036506R](#) [BR-2/3ASSPN](#)