

Mico Pro electronic circuit protection, 4 channels

IN: 24 V DC OUT: 24 V DC / 1-2-3-4-5-6-7-8-9-10A

Mico Pro® flex 4.10

4 channels


1, 2, 3, 4, 5, 6, 7, 8, 9, 10 A

Build your own Mico Pro® online:

<https://micopro.murrelektronik.com>

Link to Product

Illustration

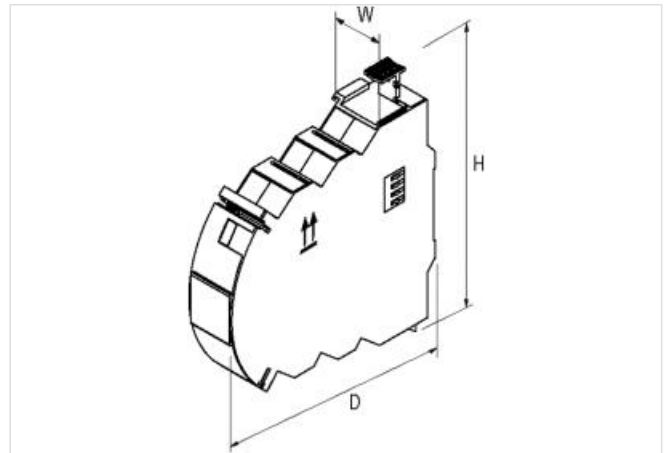

Product may differ from Image



Input

Operating voltage	12 V DC; 24 V DC (9...30 V DC)
Total current	max. 40 A

Output

Parallel usage/serial usage	-/Selectivity in 2 levels
No. of channels	4
Inrush capacity	max. 30 mF
Tolerance	0...+20%
Current adjustment	1, 2, 3, 4, 5, 6, 7, 8, 9, 10 A

Control inputs

Input voltage (ON)	9...30 V DC
Impulse length (CTRL)	OFF "high" 40/400 ms, ON "high" 20/200 ms
Input voltage (CTRL)	9...30 V DC
Impulse length (ON)	"high" 120 ms

Control outputs

Early warning (90%)	like operating voltage - max. 20 mA, via power module
Group alarm output	via power module

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
-----------------	------------------------------------

Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20
Dimensions H×W×D	130×24×114 mm
Bridging concept	Bridge set (max. 40 A)

Connections (IN)

Connection	Bridge system
------------	---------------

Connections (OUT)

Cross section (flex)	0.2...4 mm ² (AWG 24...12)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.2...2.5 mm ² (AWG 24...14)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circuit Breakers](#) category:

Click to view products by [Murr Elektronik](#) manufacturer:

Other Similar products are found below :

[LUGZX66-1-61-20.0-44](#) [M39019/01-221](#) [M39019/01-323](#) [M39019/01-336](#) [M39019/02-248](#) [M39019/02-311](#) [M39019/02-316](#) [M39019/04-249S](#) [M39019/05-246S](#) [M39019/06-254S](#) [M55629/1-016](#) [M55629/1-018](#) [M55629/1-021](#) [M55629/1-033](#) [M55629/1-036](#) [M55629/1-046](#) [M55629/1-048](#) [M55629/1-058](#) [M55629/1-067](#) [M55629/1-070](#) [M55629/1-079](#) [M55629/1-084](#) [M55629/1-085](#) [M55629/1-101](#) [M55629/1-109](#) [M55629/11-102](#) [M55629/1-120](#) [M55629/12-045](#) [M55629/12-046](#) [M55629/1-330](#) [M55629/1-366](#) [M55629/1-387](#) [M55629/1-401](#) [M55629/2-022](#) [M55629/2-030](#) [M55629/2-072](#) [M55629/2-082](#) [M55629/2-099](#) [M55629/2-101](#) [M55629/2-102](#) [M55629/21-BM-BM](#) [M55629/21-HM-HM](#) [M55629/21-NS-NS](#) [M55629/22-NR-NR-NR](#) [M55629/22-RS-RS-RS](#) [M55629/2-347](#) [M55629/2-401](#) [M55629/2-413](#) [M55629/3-030](#) [M55629/3-050](#)