

Actuators for safety switches NZ.VZ, NZ.VZ.VS and TZ

- ► Two stainless safety screws per actuator
- Increased overtravel optional
- Packaging unit 25 pieces optional

Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 1000 mm. Safety screws prevent unscrewing of the actuator. The safety screws included can be inserted with a normal tool, but cannot be removed again.


Actuator with overtravel

- 4 mm for doors with normal play
- 16 mm for doors with large play (optional)


Actuator Z-G straight Overtravel 4 mm


Dimension drawings


Actuator Z-GME straight Overtravel 4 mm, solid stainless steel



Actuator Z-GN straight Overtravel 16 mm



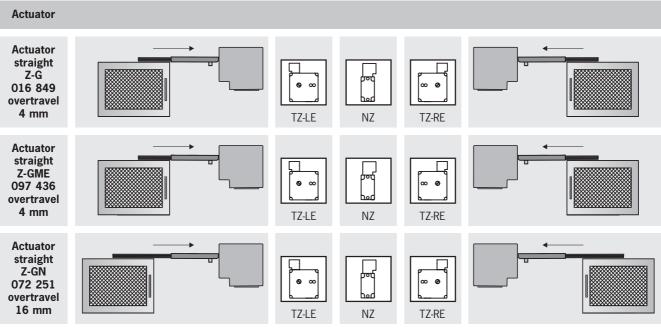

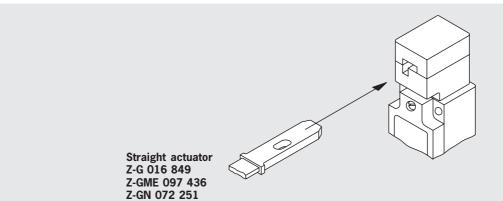

Ordering table

Designation	Version	Min. door radius r [mm]	Packaging unit	Order No.
Actuator straight	Z-G	≥ 1000	1 ea.	016 849 ACTUATOR-Z-G
	4 mm overtravel incl. 2 safety screws M5 x 10		25 ea.	074 411 ACTUATOR-Z-G/V25
	Z-GME 4 mm overtravel, made of solid stainless steel incl. 2 safety screws M5x10	≥ 1000	1 ea.	097 436 ACTUATOR-Z-GME
	Z-GN 16 mm overtravel incl. 2 safety screws M5x10	≥ 1000	1 ea.	072 251 ACTUATOR-Z-GN

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Hardware category:

Click to view products by Euchner manufacturer:

Other Similar products are found below:

893102000 LZZ1A 0098.9234 61-9707.7 61-9771.0 M2PA-5011 635401 6PA104 6PA113 6PA147-E6 6PA148-E6 6PA32 6PA9 700106
700109 700201A56 700303A56 700701264 700C1GRY 700C2GRN 704-6001 704.960.4 704.960.9 704.965.1 704.965.2 704.965.6
704.966.0 7089-3 71M1048 757200264 778000A56 79215938 MHU35 MHU37 825.003.011 825.005.011 825.053.011 825.055.011
826.000.071 827.020.011 827.400.021 835.900.023 MML52C10C MML52E10C MML72EEK MML92HGH MML93K 84211M02CNNS
84211M02LGRS 84211M02LNNX3