


## In-Line PC1 and In-Line Sealed to IP66, PC1

### IN-LINE



**FX0180, FX0280, FX0380**

- Protection Category PC1
- Fuse Sizes 5 x 20mm, 6.3 x 25mm and 6.3 x 32mm
- Screw Terminal (Solder to order)
- 10A, 50V (250V Inaccessible)
- UL Approved
- Clear or black




List No.	DIM A
FX0180	60.3
FX0280	54.5
FX0380	48.6

### IN-LINE



**FX0185, FX0285, FX0385**

- Sealed to IP66
- Protection Category PC1
- Fuse Sizes 5 x 20mm, 6.3 x 25mm and 6.3 x 32mm
- Screw Terminal (Solder to order)
- 10A, 50V (250V Inaccessible)
- UL Approved
- Clear or black

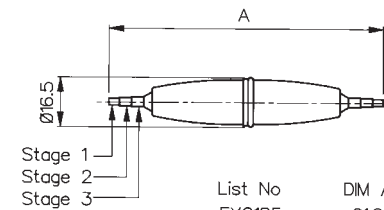

List No.	DIM A
FX0185	91.0
FX0285	85.2
FX0385	79.2

Specification	FX0180, FX0280, FX0380/Colour	FX0185, FX0285, FX0385/Colour
Fuse Size:	5 x 20mm FX0380 6.3 x 25mm FX0280 6.3 x 32mm FX0180	5 x 20mm FX0385 6.3 x 25mm FX0285 6.3 x 32mm FX0185
Cable Acceptance:	1 mm <sup>2</sup> conductor (max.)	1 mm <sup>2</sup> conductor (max.) 1 mm to 2.64mm overall diameter Stepped grommet: Stage 1: 1.00mm to 1.40mm Stage 2: 1.50mm to 1.90mm Stage 3: 2.0mm to 2.64mm
Terminations:	Screw terminal (solder to order)	Screw Terminal (solder to order)
Max. Rating:	10A, 50V (250V where inaccessible inside equipment)	10A, 50V (250V where inaccessible inside equipment)
Insulation Resistance:	>10 <sup>5</sup> MΩ @ 500V d.c.	>10 <sup>5</sup> MΩ @ 500V d.c.
High Voltage Proof Test:	2kV (50Hz for 1 minute)	2kV (50Hz for 1 minute)
Contact Resistance:	<10mΩ	<10mΩ
Operating Temp.:	-20°C to +90°C	-20°C to +70°C
Sealing:		Protection Classification IP66 BS60529: 1992
Mouldings:		
Body - Clear:	Polybutene UL94HB rated	Polybutene UL94HB rated
Body - Black:	Nylon 6 UL94V-0 rated	Nylon 6 UL94V-0 rated
Grommet:		PVC
O Ring:		Nitrile
Contacts:		
Terminals:	Brass, Nickel Plated	Brass, Nickel Plated
Grub Screw:	Stainless Steel	Stainless Steel
Approvals:		
Colour:	Clear - no suffix, /BK - Black	Clear - no suffix, /BK - Black

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [bulgin manufacturer](#):*

Other Similar products are found below :

[EXP-0931/03/P](#) [EXP-0931/04/P](#) [EXP-0941/02/P](#) [FX0296/1](#) [FX0359](#) [PX0410/10S/5560](#) [PX0580PC7](#) [PX0742/P/50OHM](#) [PX0921/10/P](#)  
[PXM6010/03S/ST/0507/SN](#) [DX1116/RD](#) [BEP01SGT0](#) [BZV01/Z0000/10](#) [EXP-0991](#) [EXP-A921/07/P](#) [PX041106S6570](#) [PX041108S5560](#)  
[PX091104S01](#) [PXP7010/03S/ST/1113](#) [PXP7011/02P/ST/0709](#) [BVA01/Z0000/10](#) [BVA01/Z0000/11](#) [13826](#) [SX0780](#) [PXM6033TP](#) [KX0372](#)  
[14025](#) [PXM6010/03S/ST/0507](#) [PXP7011/02S/ST/1113](#) [BVB01/Z0000/02](#) [A1048OAAAC](#) [C1353ATMBR3](#) [X8650VBBB076W](#)  
[C1553PBMBR3](#) [C6053ALBG21197W](#) [H8600VBBR076W](#) [PXMBNI12RPF04DPCPG9](#) [PXMBNI12RPF05APCM16](#)  
[PXPPAM12RAM05ASTPG9](#) [PXMBNI23FBBF19ASC](#) [PXP4010/04S/4550](#) [PXPPVC08RAF05BCL010PVC](#) [H3141AAKAA](#)  
[H8550VBBBEN551W](#) [PXMBNI08FBBF03AFL003](#) [LH1050B](#) [C1353ARBG2-602AW-B](#) [PXMBNI12FBBF08XSCPG9](#) [C6053ALBG31197W](#)  
[H8550VBBB](#)