


Dimensions: dimensions are in mm

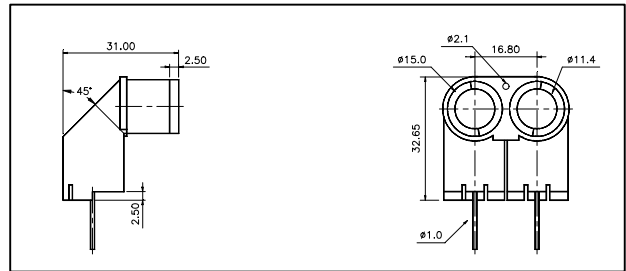


Specification

500MB120	Dual Transducer
Center Frequency	50.0±1.0Khz
Bandwidth (-6dB)	3Khz
Transmitting Sound Pressure Level at 50.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	113dB min.
Receiving Sensitivity at 50.0Khz 0dB = 1 volt/μbar	-67dB min.
Sensitivity/Cross Talk Ratio	15 dB
Nominal Impedance (Trans.)	1000 Ohm
Capacitance at 1Khz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	30°
Operation Temperature	-20 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.


Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level
 Transmitter Impedance ————
 Transmitter Phase
 Receiver Impedance ————
 Receiver Phase

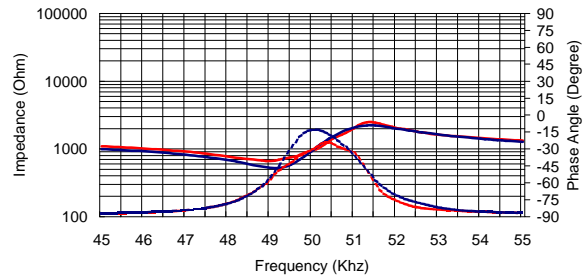


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

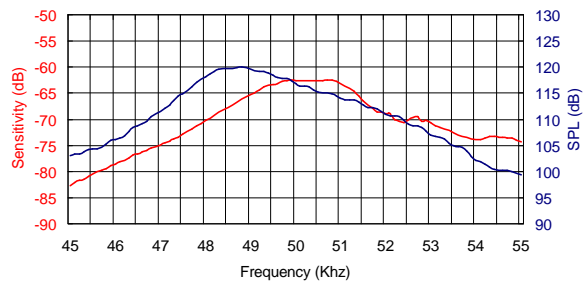

Beam Angle: Tested at 50.0Khz frequency

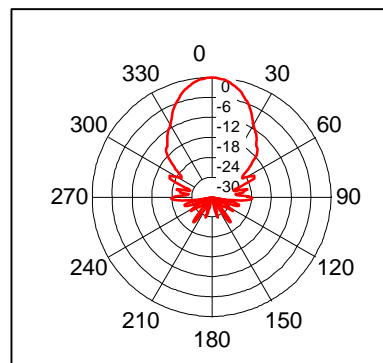

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [prowave](#) manufacturer:

Other Similar products are found below :

[400SR120](#) [400ST100](#) [FS-2513P](#) [328ER250](#) [M165D25](#) [400SR10B](#) [K4000001](#) [400ST120](#) [400SR160](#) [400EP18A](#) [500MB120](#) [K4000005](#)
[K4000004](#) [400PT160](#)