
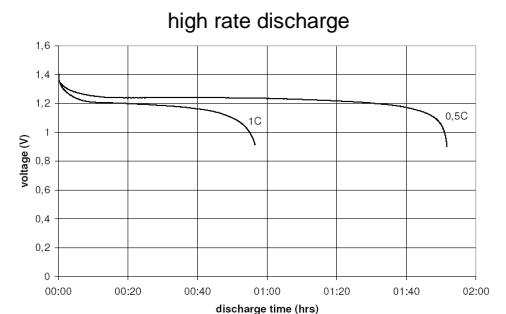
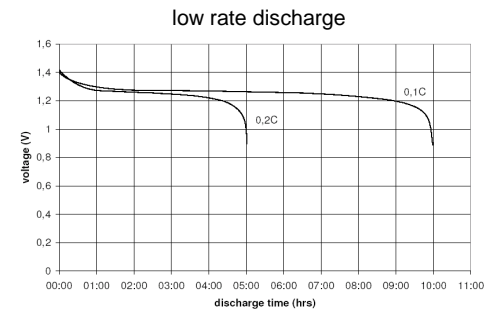
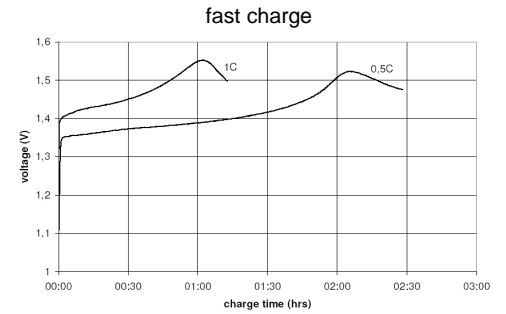


		Conditions	
cell type:		NiMH	
cell size:		AA	
nominal voltage:	1.2	V	
max. charge voltage:	1.5	V	at standard charge (0.1C / 20°C)
capacity			
nominal:	2100	mAh	discharge at 0.2C
minimum:	1900	mAh	discharge at 0.2C
	1750	mAh	discharge at 1C
			1.0V end discharge voltage
			ta: 20°C
max. continuous discharge current:	4000	mA	ta: 0...45°C
charge			
standard charge:	210	mA	14....16hrs
quick charge:	600	mA	4hrs
fast charge:	2100	mA	1.1hrs
recommended charge termination control parameters:	0...5	mV	- ΔV (-deltaV)
	0.8...1	°C	temperature rise per minute
	45...50	°C	TCO (temperature cut off)
trickle charge current:	10...40	mA	(recommended)
continuous overcharge: (less than 1 year)	≤ 200	mA	no conspicuous deformation no leakage
internal resistance: (impedance)	≤ 35	mΩ	at 1KHz battery fully charged
life expectancy:	≥ 500	cycles	acc. IEC standard
self discharge			
charge retention: (at ≤ 20°C ambient)	≥ 85	%	after 6 months storage
	≥ 80	%	after 12 months storage
initial capacity:	≥ 1400	mAh	within 30 days after delivery discharge at 0.2C
ambient temperature range:	0...45	°C	standard charge
	10...40	°C	fast charge
	- 20...55	°C	discharge
	- 20...50	°C	storage (≤3months)
	- 20...40	°C	storage (≤6months)
	- 20...30	°C	storage (≤24months)

Diagrams

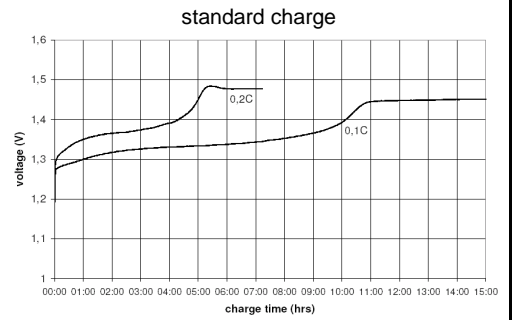


QCT1: 20/1800/35
QCT2: 30/1700/40

mechanical specifications

cell dimensions

diameter d1:	approx.	14.5 - 1.0	mm
diameter d2:		7.0	mm
height h1:		49.5 - 1.5	mm
height h2:		0.5 - 0.5	mm
weight:		28 ± 2	g



	ANSMANN Specifications for model:	AA2100mAh FLAT TOP
		low self discharge bulk package
	data sheet no. / part no.	2312-3003
	version no.	0
	author / date	TG / 23.09.2013

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ansmann](#) manufacturer:

Other Similar products are found below :

[5020012](#) [1000-0003](#) [5013233](#) [5030992](#) [1520-0004](#) [1501-0004-1](#) [1001-0020-UK](#) [2312-3003](#) [1250-0013](#) [1600-0199](#) [5030902](#) [1900-0019](#)
[1001-0014-UK](#) [5035362](#) [5013243](#) [5707173](#) [1600-0137](#) [5035391](#) [5000023](#) [5311113 / APS 1000](#) [1600-0138](#) [1250-0014](#) [BCA120-350](#) [1600-](#)
[0145](#) [5015293](#) [5030982](#) [2311-3003](#) [5030802](#) [10950964/01](#) [5030912](#) [5016243](#) [5035222](#) [2310-3001](#) [5030641](#) [5001183](#) [1600-0154](#) [5035352](#)
[5035342](#) [ACS310](#) [5035202](#) [5015332](#) [5035201](#) [5015303](#) [2311-3002](#)