
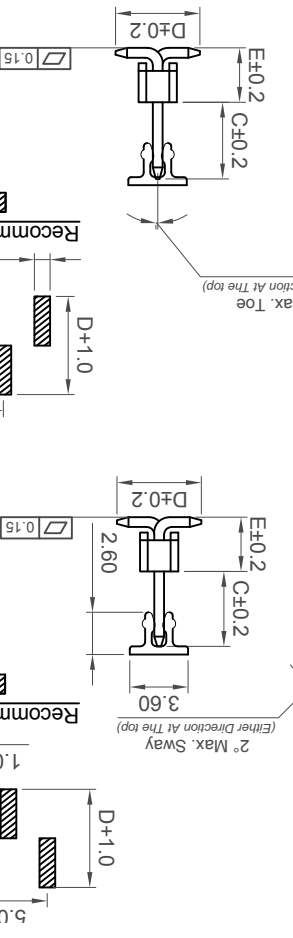


Dielectric Withstand Voltage 赛耐电压: 600 V AC
 Insulation Resistance 绝缘电阻值: 20 mΩ min.
 Contact Resistance 接触电阻值: 20 mΩ max.
 Current Rating 电流额定值: 3 Amp


Electrical 电气
 Plating 电镀
 Contact 接触: See Ordering Grid
 Contact 接触: Copper Alloy
 Option 可选: Polyester, LCP, UL94V-0
 Standard 标准: Polyamide, Nylon 6T, UL94V-0
 Insulator 绝缘体:
 Material 材料:
 Specifications 规格
 Soldering Process 可焊性
 Operating Temperature 工作温度: -40°C to +105°C
 Mechanical & Environmental 机械 & 环境

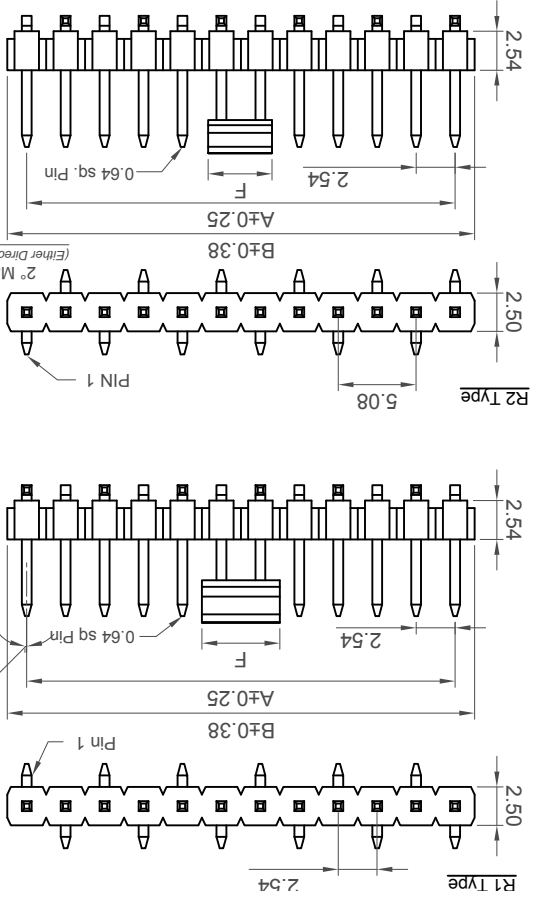

Mates with 配套之母座
 (Subject to Pin Length in 端子长度适合的条件下)
 BG205
 BG115
 BG090
 BG125
 BG130
 BG100
 BG096
 BG105
 BG145
 BG110

Part Number	Product Description		
BG055	2.54mm Pitch Pin Header, Single Row, Surface Mount, Vertical		
30th October 2006	Drawing Date		
By	AJO		
Detail	ECON B28		
Revision	G1		
Date	16/01/15		
Tolerances (Except as Noted)	X ± 0.30		
Length	X ± 0.20		
Angle	X ± 5°		
Radius	X ± 0.15		
Units:	Metric (mm)		
3rd Angle Projection	DISASSEMBLY COMPLIANT 2011/REUSE		
© This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE			
Not to Scale	LXH		
Sheet No.	1/1		

GCT
 Global Connector Technology
 www.gct.co

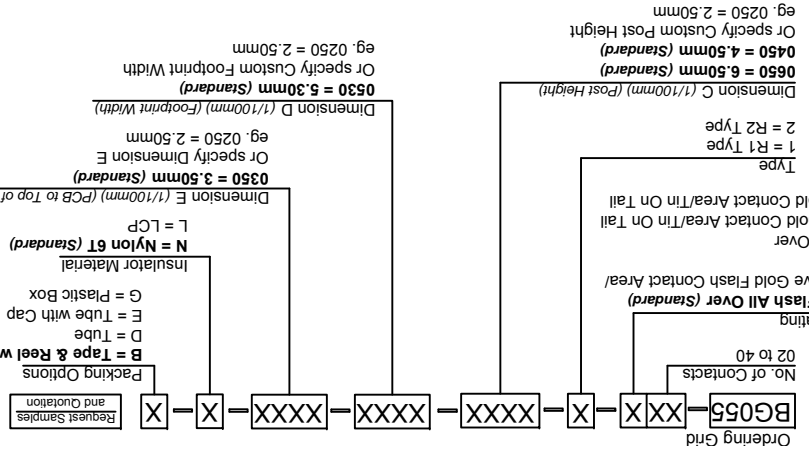

Number of Contacts	A	B	F
21	50.80	53.34	53.34
22	53.34	55.88	58.42
23	55.88	58.42	60.96
24	58.42	60.96	63.50
25	60.96	63.50	66.04
26	63.50	66.04	68.58
27	66.04	68.58	71.12
28	68.58	71.12	73.66
29	71.12	73.66	76.20
30	73.66	76.20	78.74
31	76.20	78.74	81.28
32	78.74	81.28	83.82
33	81.28	83.82	86.36
34	83.82	86.36	88.90
35	86.36	88.90	91.44
36	88.90	91.44	93.98
37	91.44	93.98	96.52
38	93.98	96.52	99.06
39	96.52	99.06	101.60
40	99.06	101.60	

Number of Contacts	A	B	F
2	2.54	5.08	5.00
3	5.08	7.62	7.62
4	7.62	10.16	10.16
5	10.16	12.70	12.70
6	12.70	15.24	15.24
7	15.24	17.78	17.78
8	17.78	20.32	20.32
9	20.32	22.86	22.86
10	22.86	25.40	25.40
11	25.40	27.94	27.94
12	27.94	30.48	30.48
13	30.48	33.02	33.02
14	33.02	35.56	35.56
15	35.56	38.10	38.10
16	38.10	40.64	40.64
17	40.64	43.18	43.18
18	43.18	45.72	45.72
19	45.72	48.26	48.26
20	48.26	50.80	50.80

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [GCT manufacturer](#):

Other Similar products are found below :

[HFW11R-1STE1H1LF](#) [FH29B-100S-0.2SHW\(99\)](#) [FA5S008HP1](#) [FH29B-120S-0.2SHW\(99\)](#) [FH29B-80S-0.2SHW\(99\)](#) [FHS-16](#) [FPH-2022G](#)
[52610-1075](#) [52610-1275](#) [52610-1934](#) [XF3M\(1\)-1415-1B-R100](#) [501864-3091-TR225](#) [0525594033](#) [086210010340800](#) [086222026001800](#)
[52271-2869-CUT-TAPE](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52610-1675](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [6-520415-9](#)
[BD021-09A-A1-0350-0200-0550-LD](#) [SFV6R-1STE9HLF](#) [XF3M-2915-1B-R100](#) [1658549-1](#) [62674-221121ALF](#) [46214008010800](#)
[046298003000883](#) [151660622](#) [842-816-2630-035](#) [AYF530665TA](#) [AYF351525](#) [046296011930846+](#) [AYF352325A](#) [046254020000800+](#)
[FH19C-13S-0.5SH\(99\)](#) [FH39J-51S-0.3SHW\(99\)](#) [AYF355125A](#) [AYF530365TA](#) [FH29B-44S-0.2SHW\(99\)](#) [SFW5R-2STAE9LF](#) [AYF351125A](#)
[AYF350725A](#) [62684-502100AHLF](#) [FH39-61S-0.3SHW\(99\)](#) [AYF414035A](#) [10064555-172520HLF](#) [AYF212335A](#) [504754-2500](#)