

SERIES 5000 - ROUND PUSHBUTTON SWITCHES

FOR AT LEAST 200 000 MECHANICAL SWITCHING CYCLES






PRODUCT FEATURES

- ◆ Attractive, round pushbutton switch
- ◆ Efficient contact system at least 200 000 mechanical switching cycles
- ◆ Variants with sealing cap for IP 54 dust and water protection
- ◆ Appliance cut-out with diameter 16 mm, alternatively with fixing pin

ON REQUEST

- ◆ Other colors
- ◆ Actuator printing
- ◆ Snap-on for greater wall thickness
- ◆ Cable assembly

Mechanical life endurance	20E4
Proof tracking	250 PTI
Protection type	IP 40 IP 54 (in variants with sealing cap)
Ambient temperature	terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C
Flammability	UL 94 V-2
Glow wire test temperature	850 °C
Material	actuator PA glass fiber-reinforced housing PA glass fiber-reinforced terminals silver plated
Plug force of the terminals	≤ 64 N
Approval marks	 /  / 
Suitable for appliances of protection class II	



ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

FACT AND KEY SWITCHES




















SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


SERIES 5000 - ROUND PUSHBUTTON SWITCHES

FOR AT LEAST 200 000 MECHANICAL SWITCHING CYCLES


 single-pole	Actuator color / printing	Housing color	4 (2) A 250 V AC 5E4	4 A 125 V AC 1/10 HP	2 A 250 V AC 1/10 HP	Terminal type	Terminal description	Contact distance in mm	Contact material	Pretravel max. in mm	Total travel / stroke in mm	Miscellaneous	Stock version
Normally open contact (SPNO)													
5000.0101			●	●	●		2.8	≈ 3	Ag	2.0 ± 0.4	4.0		●
5000.0103			●	●	●		2.8	≈ 3	Ag	2.0 ± 0.4	4.0		●
5000.0104			●	●	●		2.8	≈ 3	Ag	2.0 ± 0.4	4.0		●
5000.0211			●	●	●		2.8	≈ 3	Ag	2.0 ± 0.4	4.0	fixing pin	●
5000.0212			●	●	●		2.8	≈ 3	Ag	2.0 ± 0.4	4.0	fixing pin	
5000.0501			●	●	●		2.8	≈ 3	Ag	2.0 ± 0.4	4.0	fixing pin with IP 54 sealing cap	




Basic type 5000

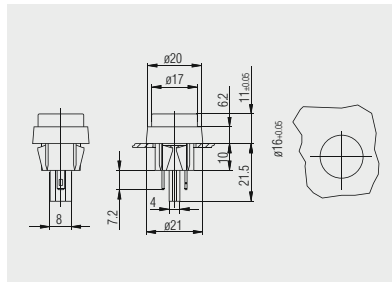

Quick-connect terminal 2.8 x 0.8

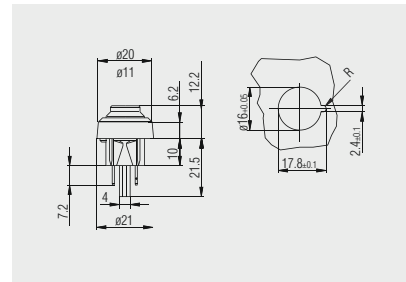


Quick-connect terminal 2.8 x 0.8 (with fixing pin and IP 54 sealing cap) 5000.0501



X = wall thickness

X	Ø
1.4 ... 1-7	16.0 +0.05

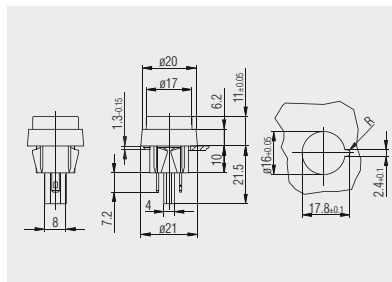

Quick-connect terminal 2.8 x 0.8 (with fixing pin) 5000.0211 and 5000.0212

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [marquardt](#) manufacturer:

Other Similar products are found below :

[1661.0201-00](#) [2420.0101](#) [01050.5305-00](#) [01802.1108-02](#) [1264.3501](#) [1921.1101](#) [1045.2702](#) [1050.0151](#) [3250.0590](#) [1800.1108](#) [0320.0302](#)
[01050.3102](#) [01835.3102-01](#) [2709.5101](#) [1552.3112](#) [1804.1102](#) [1839.1407](#) [840.000.071](#) [1824.1101](#) [1805.7109-03](#) [1263.0201](#) [1251.0106](#)
[6425.3111](#) [1363.0101](#) [1808.6302-00](#) [01805.7104](#) [1352.0101](#) [828.000.021](#) [1269.0201](#) [02410.0401-02](#) [1010.0101](#) [1837.1118](#) [02410.0301-02](#)
[02420.0101-00](#) [1005.0101](#) [2410.1001](#) [1552.4606](#) [2410.0301](#) [2410.0101](#) [1832.8112](#) [1838.1509-01](#) [1010.7254](#) [01004.1002-02](#) [825.003.011](#)
[1230.0501](#) [5000.0103](#) [09033.0400-00](#) [0100.1201](#) [0132.0101](#) [1807.1108](#)