

# SINGLE SUPPLY QUAD OPERATIONAL AMPLIFIER

## ■ GENERAL DESCRIPTION


The NJM13403 is single-supply quad operational amplifier, which can operate from 2V supply. The features are low offset voltage, low bias current, high slew-rate, and free crossover distortion through the AB class output stage.

The package lineup is DIP, DMP and others compact, so that the NJM13403 is suitable for audio for low voltage operation and any other kind of signal amplifier.

## ■ FEATURES

- Operating Voltage                    (+2V~+14V)
- Slew Rate                            ( 1.2V/ $\mu$ s typ. )
- Operating Current                 ( 3.0mA typ. )
- Bipolar Technology
- Package Outline                  DIP14,DMP14,SSOP14

## ■ PIN CONFIGURATION

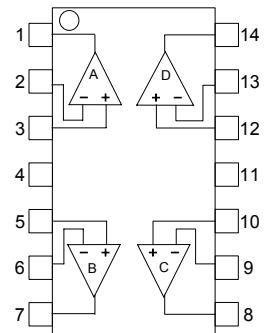


NJM13403D1, NJM13403M

NJM13403V

### PIN FUNCTION

1.A OUTPUT	8.C OUTPUT
2.A -INPUT	9.C +INPUT
3.A +INPUT	10.C +INPUT
4.V <sup>+</sup>	11.GND
5.B +INPUT	12.D +INPUT
6.B -INPUT	13.D -INPUT
7.B OUTPUT	14.D OUTPUT

## ■ EQUIVALENT CIRCUIT ( 1/4 Shown )

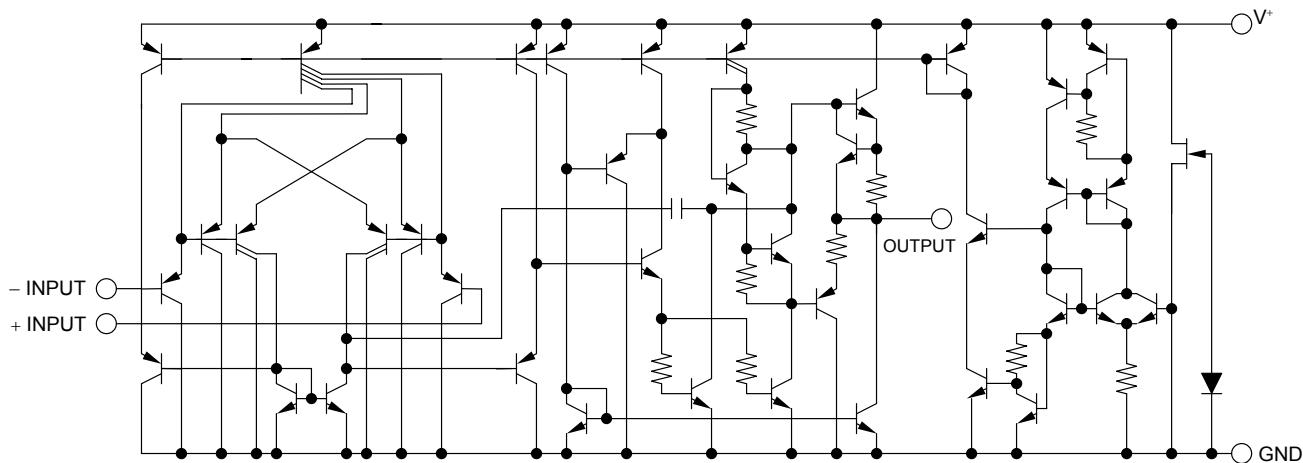

# NJM13403

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )







PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	15	V
Differential Input Voltage	V <sub>ID</sub>	14	V
Input Voltage	V <sub>IC</sub>	-0.3~+14	V
Power Dissipation	P <sub>D</sub>	( DIP14 ) 700 ( DMP14 ) 300 ( SSOP14 ) 300	mW
Operating Temperature Range	T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range	T <sub>stg</sub>	-40~+125	°C

## ■ ELECTRICAL CHARACTERISTICS

( V<sup>+</sup>=5V, Ta=25°C )







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V <sub>opr</sub>		2	-	14	V
Input Offset Voltage	V <sub>IO</sub>	R <sub>S</sub> =0Ω	-	0.5	4	mV
Input Offset Current	I <sub>IO</sub>		-	5	50	nA
Input Bias Current	I <sub>B</sub>		-	25	150	nA
Large Signal Voltage Gain	A <sub>V</sub>	R <sub>L</sub> ≥2kΩ	88	100	-	dB
Maximum Output Voltage Swing	V <sub>OM</sub>	R <sub>L</sub> =2kΩ	4.0	4.2	-	V
Input Common Mode Voltage Range	V <sub>ICM</sub>		0~3.5	-	-	V
Common Mode Rejection Ratio	CMR		70	90	-	dB
Supply Voltage Rejection Ratio	SVR		80	94	-	dB
Output Source Current	I <sub>SOURCE</sub>	V <sub>IN</sub> <sup>+</sup> =1V, V <sub>IN</sub> <sup>-</sup> =0V	20	35	-	mA
Output Sink Current	I <sub>SINK</sub>	V <sub>IN</sub> <sup>+</sup> =0V, V <sub>IN</sub> <sup>-</sup> =1V	10	30	-	mA
Operating Current	I <sub>CC</sub>	R <sub>L</sub> =∞	-	3.0	5.0	mA
Slew Rate	SR	V <sup>+</sup> /V <sup>-</sup> =±2.5V, R <sub>L</sub> =2kΩ, A <sub>V</sub> =0dB, f=1kHz	-	1.2	-	V/μs
Unity Gain Bandwidth	f <sub>T</sub>	R <sub>L</sub> =2kΩ	-	2.0	-	MHz
Total Harmonic Distortion	THD	R <sub>L</sub> =2kΩ, A <sub>V</sub> =40dB, f=20kHz, V <sub>O</sub> =1.0Vrms	-	0.2	-	%

## ■ TYPICAL CHARACTERISTICS

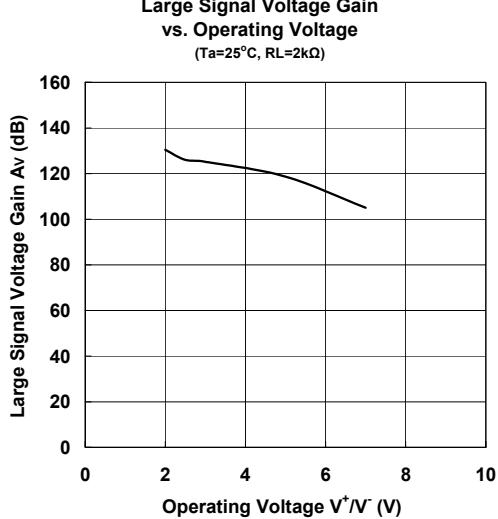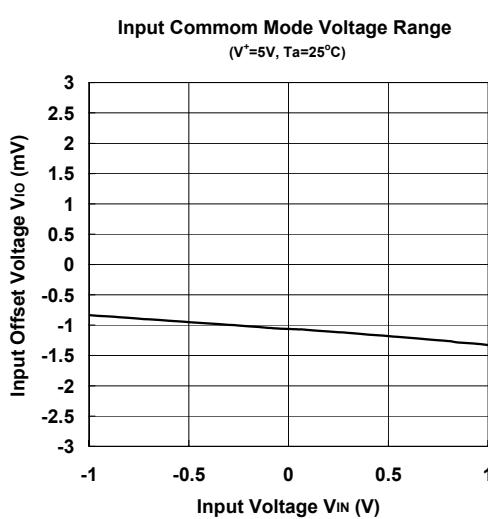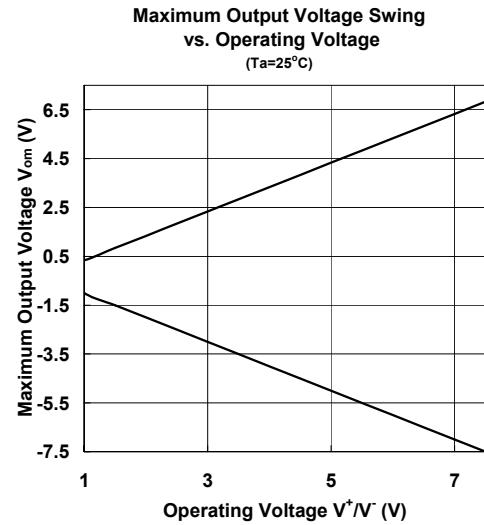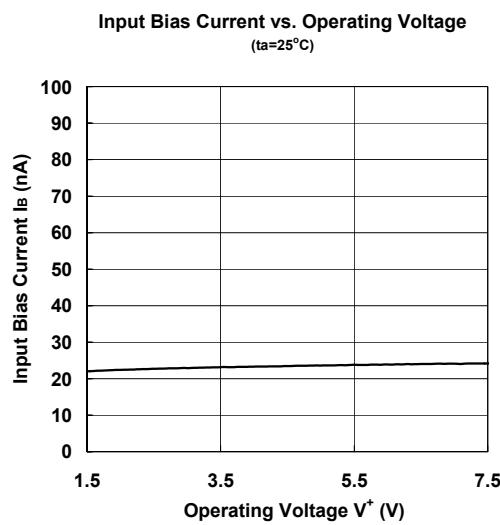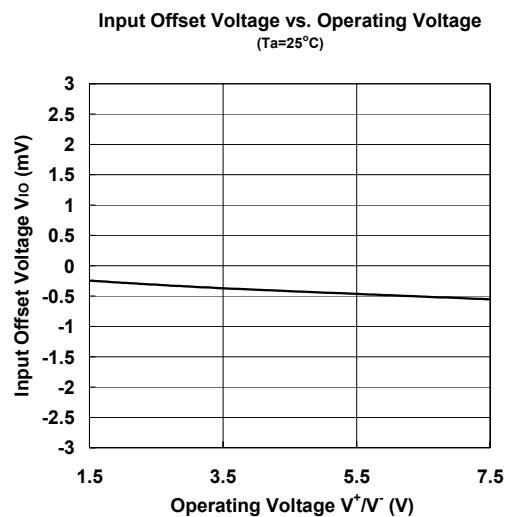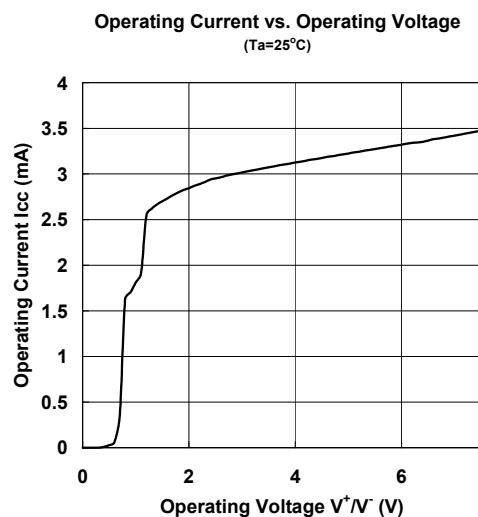


# NJM13403

## ■ TYPICAL CHARACTERISTICS

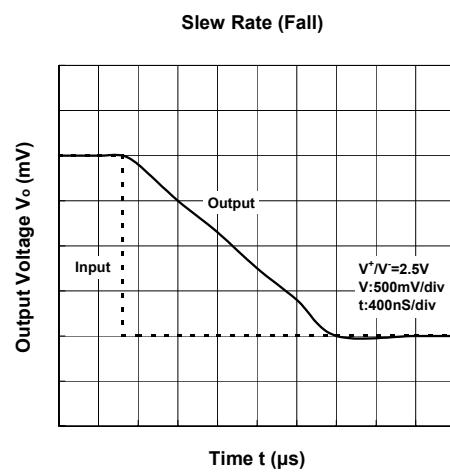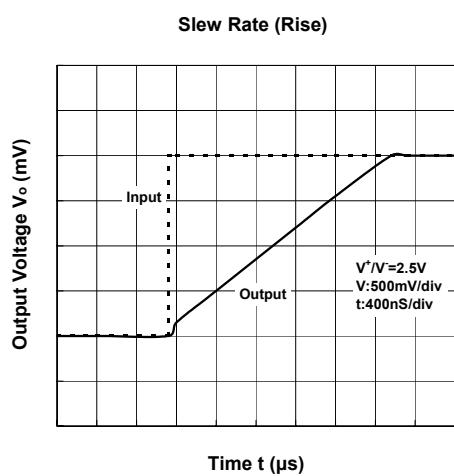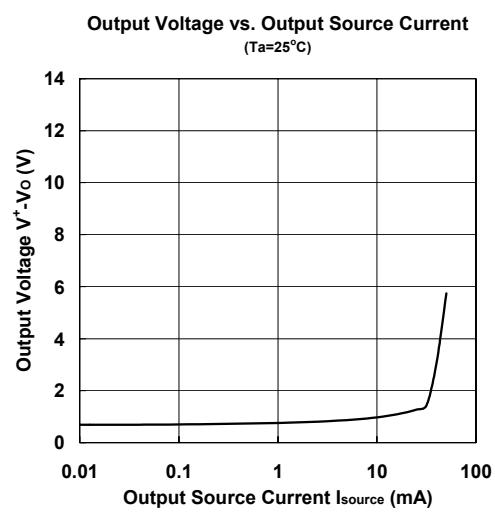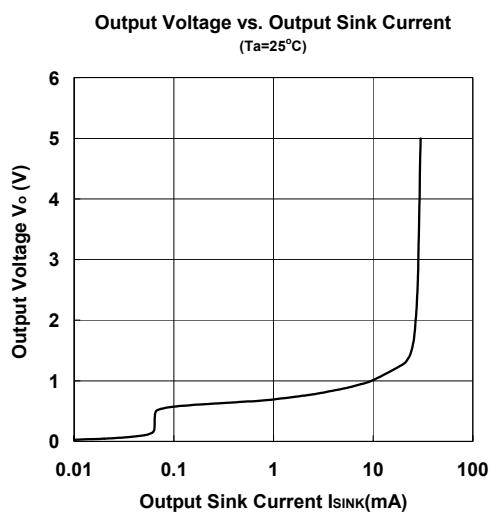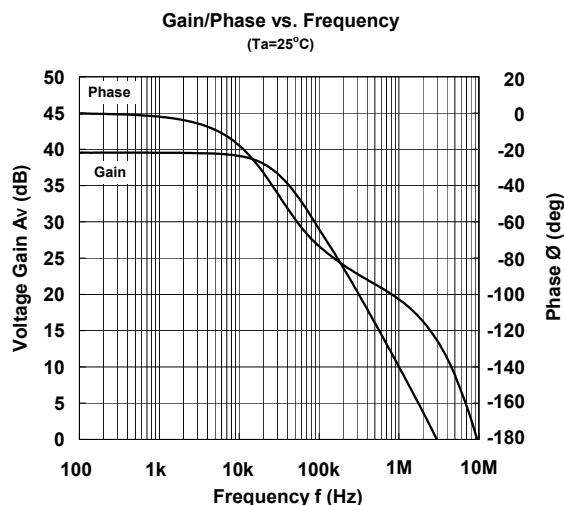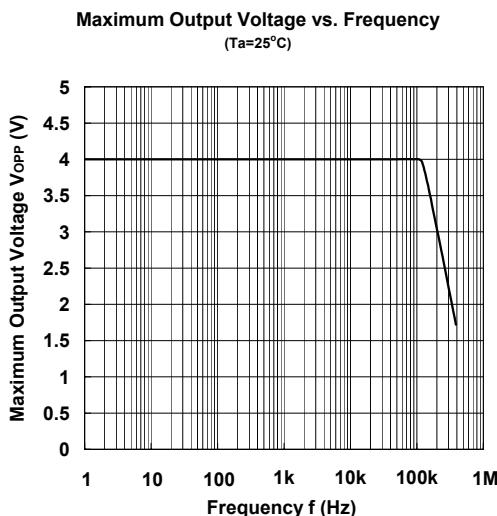


## ■ TYPICAL CHARACTERISTICS


Maximum Output Voltage  
vs. Load Resistance  
( $T_a=25^\circ\text{C}$ )

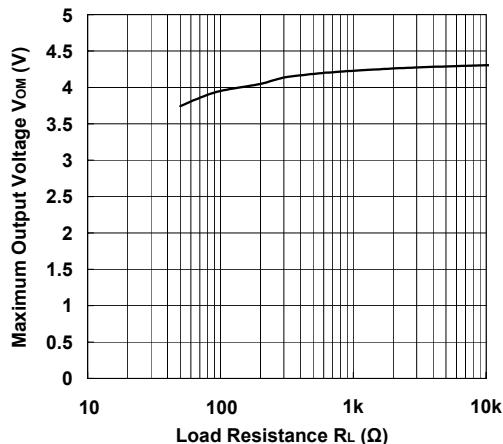


Total Harmonic Distortion

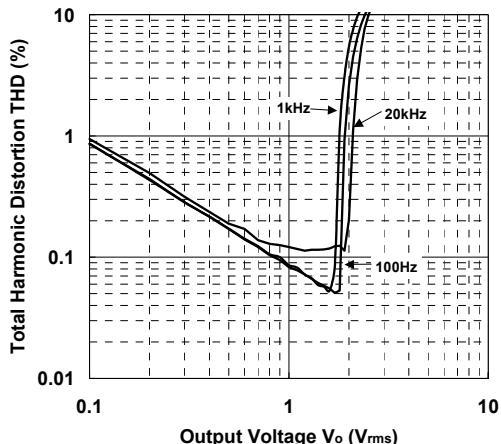


Equivalent Noise Voltage vs. Frequency

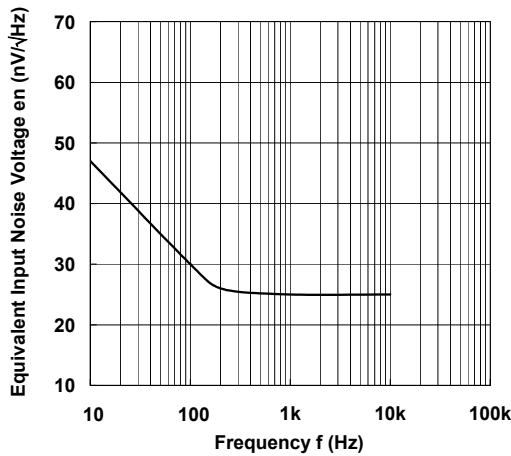


Operating Voltage vs. Ambient Temperature

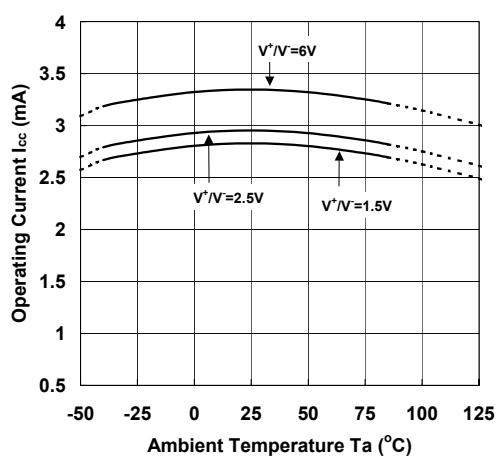

Input Offset Voltage  
vs. Ambient Temperature






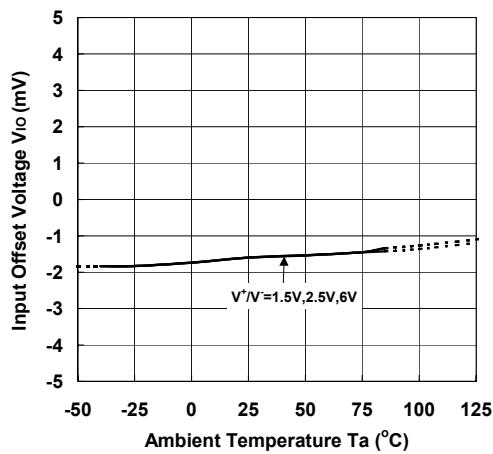


Input Bias Current vs. Ambient Temperature

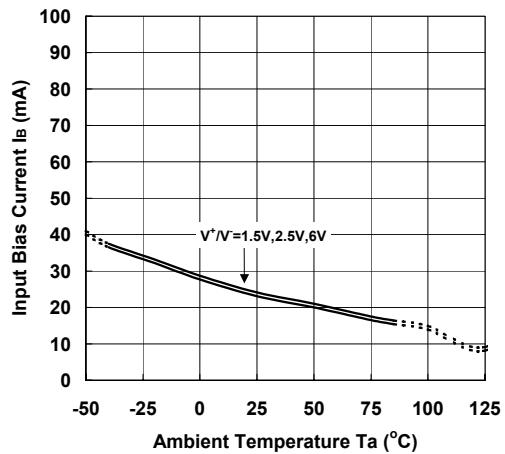

# NJM13403

## ■ TYPICAL CHARACTERISTICS

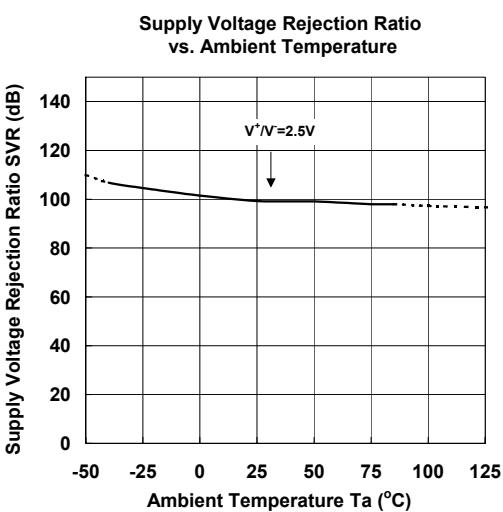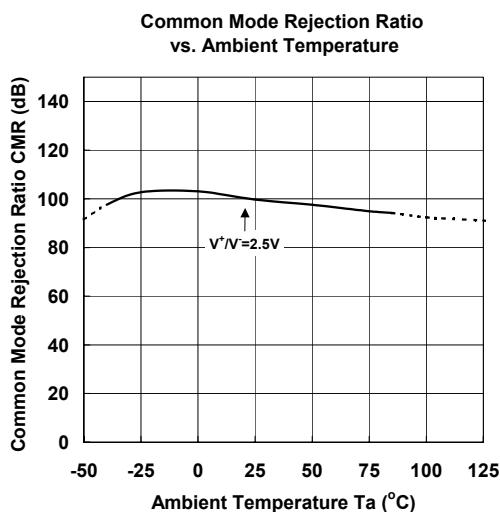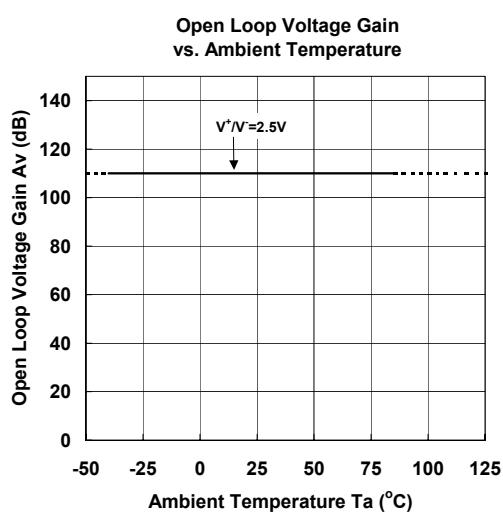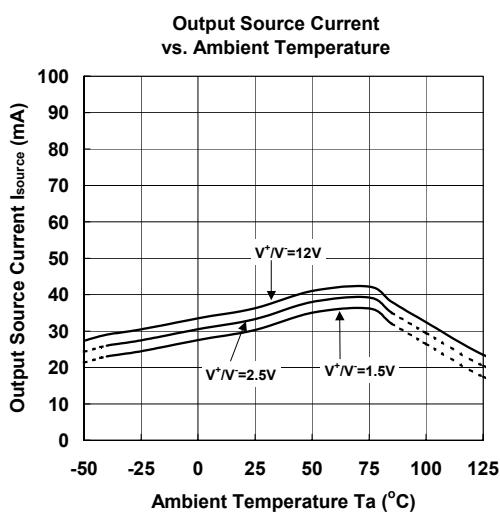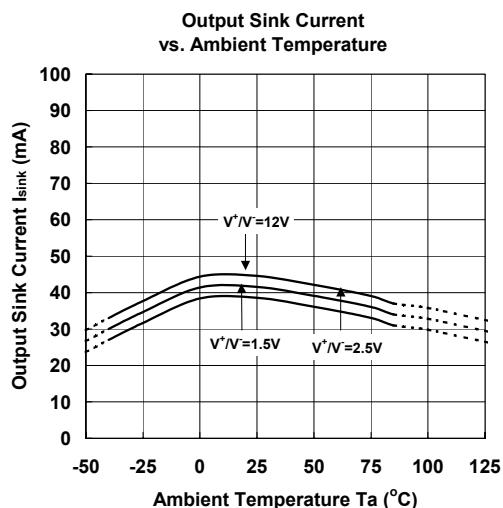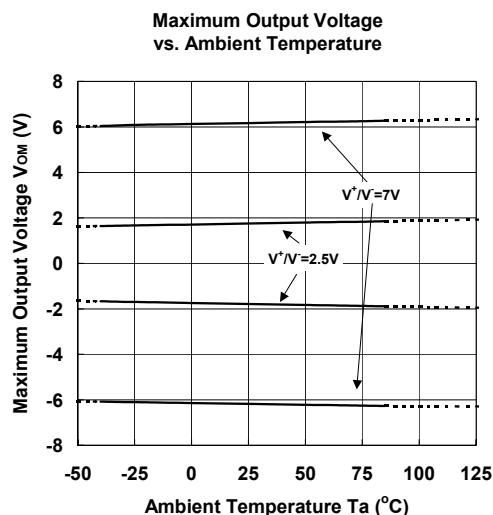

### [CAUTION]

The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Operational Amplifiers - Op Amps category:***

***Click to view products by Nissinbo manufacturer:***

Other Similar products are found below :

[NCV33072ADR2G](#) [LM358SNG](#) [430227FB](#) [UPC824G2-A](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [UPC822G2-A](#) [UPC259G2-A](#) [UPC258G2-A](#)  
[NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#) [HA1630S01LPEL-E](#) [SCY33178DR2G](#) [NJU77806F3-TE1](#)  
[NCV5652MUTWG](#) [NCV20034DR2G](#) [LM324EDR2G](#) [LM2902EDR2G](#) [NTE7155](#) [NTE778S](#) [NTE871](#) [NTE924](#) [NTE937](#) [MCP6V17T-E/MNY](#) [MCP6V19-E/ST](#) [MXD8011HF](#) [MCP6V17T-E/MS](#) [SCY6358ADR2G](#) [ADA4523-1BCPZ](#) [LTC2065HUD#PBF](#) [ADA4523-1BCPZ-RL7](#) [NJM2904CRB1-TE1](#) [2SD965T-R](#) [RS6332PXK](#) [BDM8551](#) [BDM321](#) [MD1324](#) [COS8052SR](#) [COS8552SR](#) [COS8554SR](#) [COS2177SR](#)  
[COS2353SR](#) [COS724TR](#) [ASOPD4580S-R](#) [RS321BKXF](#) [ADA4097-1Hujz-RL7](#) [NCS20282FCTTAG](#)