

TRIPLE 2-CHANNEL MULTIPLEXER

■ GENERAL DESCRIPTION

The NJU4053B is a triple 2-channel multiplexer with three independent control inputs and an inhibit input.

The three control input signals select 1 of a pair of channels to be turned on and connect them to the three outputs.

The operating voltage is as wide as 3 to 18V and the quiescent current is as low as 5μA max. (at V<sub>DD</sub>=5V).

It is equivalent to RCA CD4053B and Motorola MC14053B.

■ PACKAGE OUTLINE



NJU4053BD



NJU4053BM




NJU4053BV


■ FEATURES

- High ON/OFF Output Voltage Ratio --- 65dB Typ. (R<sub>L</sub>=10kΩ)
- Low Quiescent Current --- 5μA Typ. at V<sub>DD</sub>=5V
- Low Crosstalk between channels --- 80dB Typ.
- Wide Operating Voltage --- 3 ~ 18V
- Linearity in the transfer characteristics.  
ΔR<sub>ON</sub> < 60Ω (V<sub>IN</sub>=V<sub>DD</sub>~V<sub>EE</sub>, V<sub>DD</sub>=15V)
- Package Outline --- DIP/DMP/SSOP 16
- C-MOS Technology


■ EQUIVALENT CIRCUIT

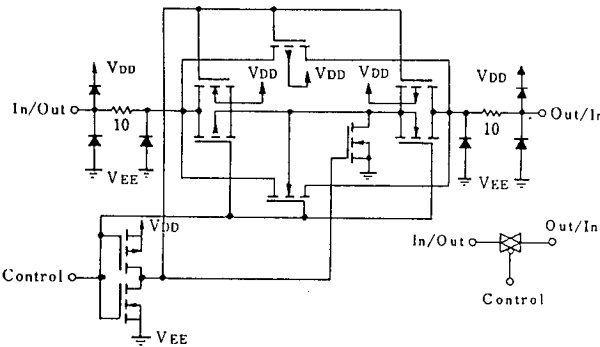

■ PIN CONFIGURATION



■ BLOCK DIAGRAM

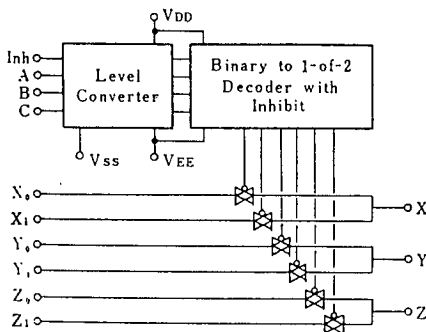

■ TRUTH TABLE

| INH | C | B | A | On Switch      |                |                |
|-----|---|---|---|----------------|----------------|----------------|
| 0   | 0 | 0 | 0 | Z <sub>0</sub> | Y <sub>0</sub> | X <sub>0</sub> |
| 0   | 0 | 0 | 1 | Z <sub>0</sub> | Y <sub>0</sub> | X <sub>1</sub> |
| 0   | 0 | 1 | 0 | Z <sub>0</sub> | Y <sub>1</sub> | X <sub>0</sub> |
| 0   | 0 | 1 | 1 | Z <sub>0</sub> | Y <sub>1</sub> | X <sub>1</sub> |
| 0   | 1 | 0 | 0 | Z <sub>1</sub> | Y <sub>0</sub> | X <sub>0</sub> |
| 0   | 1 | 0 | 1 | Z <sub>1</sub> | Y <sub>0</sub> | X <sub>1</sub> |
| 0   | 1 | 1 | 0 | Z <sub>1</sub> | Y <sub>1</sub> | X <sub>0</sub> |
| 0   | 1 | 1 | 1 | Z <sub>1</sub> | Y <sub>1</sub> | X <sub>1</sub> |
| 1   | x | x | x | None           |                |                |

x: Don't Care

**■ ABSOLUTE MAXIMUM RATINGS**

( Ta=25°C )

| PARAMETER                     | SYMBOL            | RATINGS                              | UNIT |
|-------------------------------|-------------------|--------------------------------------|------|
| Supply Voltage                | $V_{DD} - V_{EE}$ | - 0.5 ~ + 20                         | V    |
| Input Voltage(Control Signal) | $V_{IN}$          | $V_{SS}-0.5 \sim V_{DD}+0.5$         | V    |
| Input Voltage(Analog Signal)  | $V_{SIG}$         | $V_{EE}-0.5 \sim V_{DD}+0.5$         | V    |
| Input Current                 | $I_{IN}$          | ± 10                                 | mA   |
| Output Current                | $I_{OUT}$         | ± 10                                 | mA   |
| Power Dissipation             | $P_D$             | 500 (DIP)<br>200 (DMP)<br>300 (SSOP) | mW   |
| Operating Temperature Range   | $T_{opr}$         | - 40 ~ + 85                          | °C   |
| Storage Temperature Range     | $T_{stg}$         | - 65 ~ + 150                         | °C   |

**■ ELECTRICAL CHARACTERISTICS**

• DC Characteristics

 (  $V_{SS}=0V$  )

| PARAMETER                     | SYMBOL          | CONDITIONS  | $V_{DD}$<br>(V)  | Ta=-40°C             |     | Ta=25°C              |                   | Ta=85°C                   |          | UNIT |
|-------------------------------|-----------------|---|--|----------------------|-----|----------------------|-------------------|---------------------------|----------|------|
|                               |                 |   |  | MIN                  | MAX | MIN                  | TYP               | MAX                       | MIN      |      |
| Quiescent Current             | $I_{DD}$        | No signal<br>Per Package                          | 5<br>10<br>15<br>20                                      | 5<br>10<br>20<br>100 |     | 5<br>10<br>20<br>100 |                   | 150<br>300<br>600<br>3000 | $\mu A$  |      |
| On-State Resistance           | $R_{ON}$        | $0 \leq V_{is} \leq V_{DD}$<br>$V_{EE}=V_{SS}=0V$ | 5<br>10<br>15  | 500<br>210<br>140    |     | 220<br>100<br>60     | 600<br>250<br>160 | 800<br>300<br>200         | $\Omega$ |      |
| On-State Resistance Deviation | $\Delta R_{ON}$ | Between 2 channels<br>$V_{EE}=V_{SS}=0V$          | 5<br>10<br>15  |                      |     | 15<br>10<br>5        |                   |                           | $\Omega$ |      |
| Off-Channel Leakage Current   |                 | Each channel<br>$V_{EE}=V_{SS}=0V$                | 18   | ±1000                |     | ±10                  | ±100              | ±1000                     | nA       |      |
| Input Capacitance             | $C_{IN}$        | $V_{IN}=0V$<br>Control Inhibit<br>Switch          |  |                      |     | 5.0<br>10            | 7.5               |                           | pF       |      |
| Low Level Input Voltage       | $V_{IL}$        | $R_L=10k\Omega$<br>$SW=V_{DD}$<br>$V_{EE}=V_{SS}$ | $V_o=1.0V$<br>5<br>$V_o=1.0V$<br>10<br>$V_o=1.5V$<br>15  | 1.5<br>3.0<br>4.0    |     | 1.5<br>3.0<br>4.0    |                   | 1.5<br>3.0<br>4.0         | V        |      |
| High Level Input Voltage      | $V_{IH}$        | $V_{EE}=V_{SS}$                                   | $V_o=4.0V$<br>5<br>$V_o=9.0V$<br>10<br>$V_o=13.5V$<br>15 | 3.5<br>7.0<br>11.0   |     | 3.5<br>7.0<br>11.0   |                   | 3.5<br>7.0<br>11.0        | V        |      |
| Input Current                 | $\pm I_{IN}$    | $V_{IN}=0$ or 18V                                 | 18   | ±0.1                 |     | ±0.1                 |                   | ± 1                       | $\mu A$  |      |

## ■ SWITCHING CHARACTERISTICS

 (  $T_a=25^\circ\text{C}$ ,  $C_L=50\text{pF}$  )


| PARAMETER                 |                      | SYMBOL                 | CONDITIONS  | $V_{DD}(\text{V})$ | MIN  | TYP  | MAX | UNIT |
|---------------------------|----------------------|------------------------|---|--------------------|------|------|-----|------|
| Propagation Delay Time    | SW Input to Output   | $t_{PLH}$              | $R_L=10\text{k}\Omega$  | 5                  | 15   | 45   | ns  |      |
|                           |                      |                        |   | 10                 | 8    | 30   |     |      |
|                           |                      |                        |   | 15                 | 5    | 20   |     |      |
|                           | CONT Input to Output | $t_{PHL}$              |   | 5                  | 15   | 45   |     |      |
|                           |                      |                        |   | 10                 | 8    | 30   |     |      |
|                           |                      |                        |   | 15                 | 5    | 20   |     |      |
|                           | $t_{PZH}$            | 5                      | 450   | 1000               | ns   |      |     |      |
|                           |                      | 10                     | 200   | 500                |      |      |     |      |
|                           |                      | 15                     | 150   | 400                |      |      |     |      |
| Output Enable Time        | $t_{PHZ}$            | $R_L=10\text{k}\Omega$ | 5   | 600                |      | 1400 | ns  |      |
|                           |                      |                        | 10  | 250                |      | 700  |     |      |
|                           |                      |                        | 15  | 200                |      | 500  |     |      |
| Output Disable Time       | $t_{PLZ}$            |                        | 5   | 600                | 1400 | ns   |     |      |
|                           |                      |                        | 10  | 250                | 700  |      |     |      |
|                           |                      |                        | 15  | 200                | 500  |      |     |      |
| Sine-Wave Distortion      |                      |                        | $R_L=10\text{k}\Omega$ , $f=1\text{kHz}$ , $V_{IS}=5V_{P-P}$                              | 10                 | 0.05 |      |     | %    |
| Feedthrough (all-ch. off) |                      |                        | $R_L=1\text{k}\Omega$ , $20\log_{10}V_{OS}/V_{IS}=-50\text{dB}$                           | 10                 | 4.5  |      |     | MHz  |
| Crosstalk                 | SW A to B            |                        | $R_L=1\text{k}\Omega$ , $V_{IS}=1/2(V_{DD}-V_{SS})_{P-P}$                                 | 10                 | 3.0  |      |     | MHz  |
|                           | Control-Out          |                        | $R_L=1\text{k}\Omega$ , $R_L=10\text{k}\Omega$ , $t_r=t_f=20\text{ns}$<br>CONTROL/INHIBIT | 10                 | 30   |      | mV  |      |

**MEASUREMENT CIRCUITS**


## 1. Noise Margin




## 2. Propagation Delay

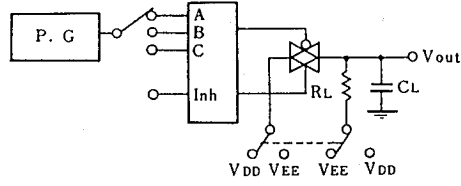


## 3. Feedthrough

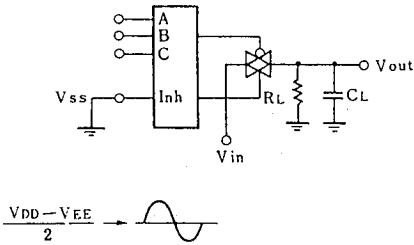

## 4. Crosstalk (Switch A and B)

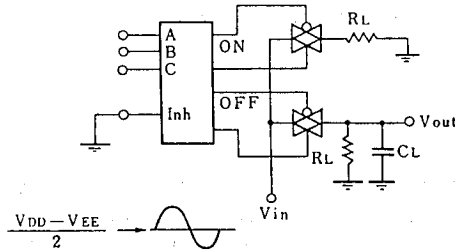

## 5. Crosstalk (Control and Out)



## MEMO

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multiplexer Switch ICs](#) category:*

*Click to view products by [Nisshinbo](#) manufacturer:*

Other Similar products are found below :

[NLV74HC4066ADR2G](#) [HEF4051BP](#) [MC74HC4067ADTG](#) [DG508AAK/883B](#) [NLV14051BDG](#) [016400E](#) [PI3V512QE](#) [7705201EC](#)  
[PI2SSD3212NCE](#) [NLAS3257CMX2TCG](#) [PI5A3157BC6EX](#) [PI3DBS12412AZLEX](#) [PI3V512QEX](#) [PI3DBS16213ZLEX](#) [PI3DBS16415ZHEX](#)  
[PS509LEX](#) [MUX36S16IRSNR](#) [74LVC1G3157GM-Q10X](#) [TC7W53FK,LF](#) [CD4053BM96](#) [TC4066BP-NF](#) [HEF4053BT.653](#) [PI3L720ZHEX](#)  
[ADG5408BRUZ-REEL7](#) [ADG1404YRUZ-REEL7](#) [ADG1208YRZ-REEL7](#) [MAX4704EUB+T](#) [ADG1406BRUZ-REEL7](#) [CD4053BPWRG4](#)  
[ADG658TRUZ-EP](#) [74HC4053D.653](#) [74HCT4052PW.118](#) [74LVC2G53DP.125](#) [74HC4052DB.112](#) [74HC4052PW.112](#) [74HC4053DB.112](#)  
[74HC4067DB.112](#) [74HC4351DB.112](#) [74HCT4052D.112](#) [74HCT4052DB.112](#) [74HCT4053DB.112](#) [74HCT4351D.112](#) [74LV4051PW.112](#)  
[FSA1256L8X\\_F113](#) [PI5V330QE](#) [PI5V331QE](#) [5962-8771601EA](#) [5962-87716022A](#) [ADG5249FBRUZ](#) [ADG1439BRUZ](#)