
ULTRA SMALL PACKAGE VOLTAGE REGULATOR

NO.EA-048-111020

OUTLINE

The Rx5RW Series are CMOS-based voltage regulator ICs with high accuracy output voltage and ultra-low supply current developed. Each of these ICs consists of a driver transistor, a voltage reference unit, an error amplifier, resistors for setting output voltage and a current limit circuit.

The output voltage of these ICs is fixed with high accuracy.

Even if V_{OUT} is shorted to GND, the included current limit circuit protects the ICs from the destruction. Furthermore, Rx5RWxxA/B have a chip enable function, so that the supply current on standby can be minimized.

Since the packages for these ICs are SC-82AB and SON1612-6, high density mounting of the ICs on boards is possible.


FEATURES

| | |
|---|--|
| • Supply Current | Typ. 1.5 μ A (except pull-up/pull-down current for \overline{CE} /CE pin) |
| • Standby Current | Typ. 0.1 μ A (applied to A/B version) |
| • Dropout Voltage | Typ. 40mV ($I_{OUT}=1mA$, Rx5RW30A/B/C) |
| • Temperature-Drift Coefficient of Output Voltage | Typ. $\pm 100ppm/^{\circ}C$ |
| • Line Regulation | Typ. 0.05%/V |
| • Input Voltage Range | Max. 8.0V |
| • Output Voltage Range..... | 1.5V to 6.0V (0.1V steps) |
| • Output Voltage Accuracy..... | $\pm 2.0\%$ |
| • Packages | SC-82AB, SON1612-6 |
| • Built-in Current Limit Circuits | |

APPLICATIONS

- Power source for battery-powered equipment.
- Power source for cameras, VCRs, camcorders, hand-held audio instruments and hand-held communication equipment.
- Precision voltage references.

BLOCK DIAGRAMS

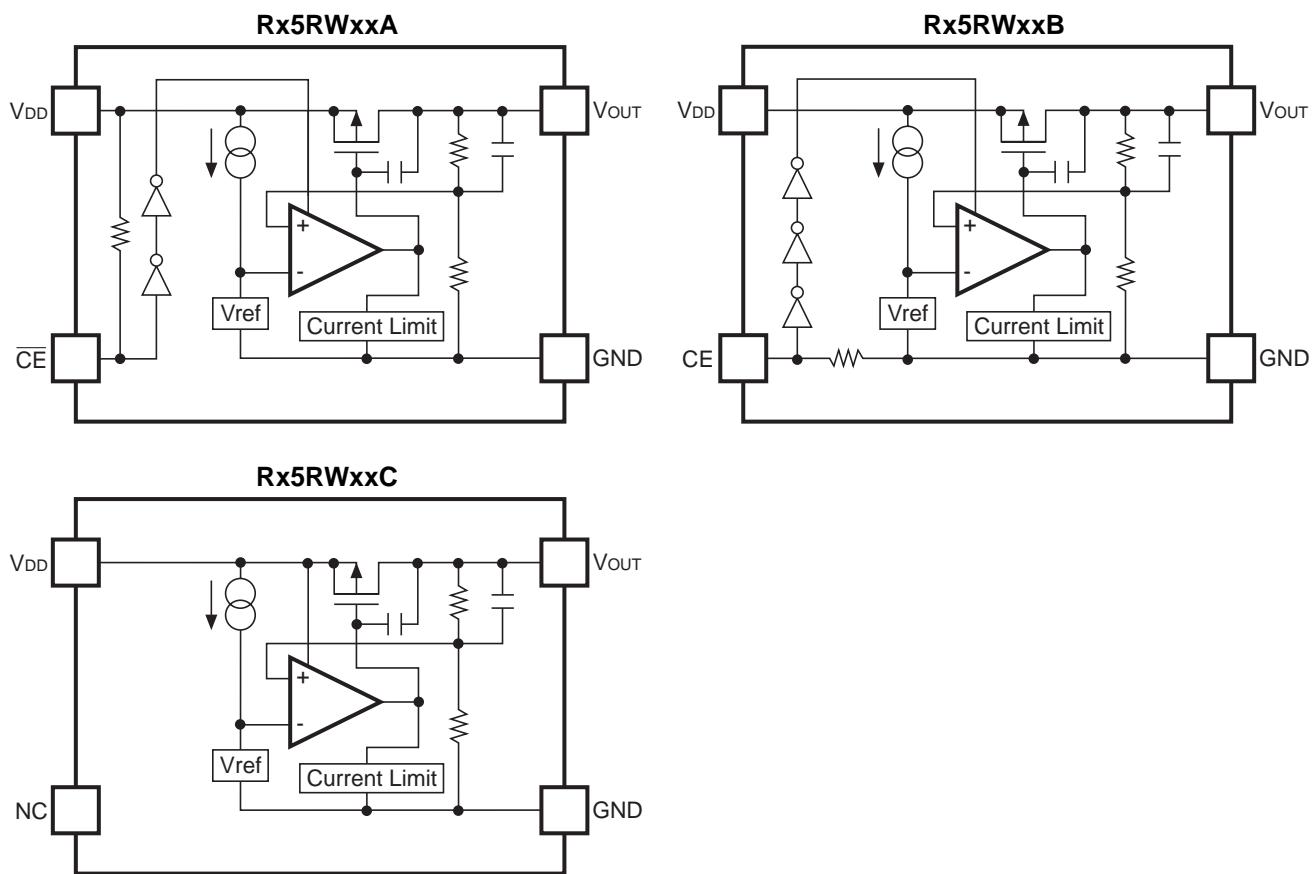

SELECTION GUIDE

The output voltage, chip enable polarity, and package, etc. for the ICs can be selected at the user's request.


| Product Name | Package | Quantity per Reel | Pb Free | Halogen Free |
|-----------------|-----------|-------------------|---------|--------------|
| RD5RWxx*A-TR-FE | SON1612-6 | 4,000 pcs | Yes | Yes |
| RQ5RWxx*A-TR-FE | SC-82AB | 3,000 pcs | Yes | Yes |

xx: The output voltage can be designated in the range from 1.5V(15) to 6.0V(60) in 0.1V steps.


* : CE pin polarity are options as follows.
 (A) "L" active
 (B) "H" active
 (C) without chip enable

PIN CONFIGURATION

● SC-82AB



● SON1612-6



PIN DESCRIPTION

● SC-82AB

| Pin No | Symbol | Pin Description |
|--------|-----------------------------|--|
| 1 | GND | Ground Pin |
| 2 | V _{DD} | Input Pin |
| 3 | V _{OUT} | Output Pin |
| 4 | \overline{CE} or CE or NC | Chip Enable Pin ("L" active/"H" active) or No Connection |

● SON1612-6

| Pin No | Symbol | Pin Description |
|--------|-----------------------------|--|
| 1 | \overline{CE} or CE or NC | Chip Enable Pin ("L" active/"H" active) or No Connection |
| 2 | V _{DD} | Input Pin |
| 3 | V _{OUT} | Output Pin |
| 4 | NC | No Connection |
| 5 | V _{DD} | Input Pin |
| 6 | GND | Ground Pin |

ABSOLUTE MAXIMUM RATINGS

| Symbol | Item | Rating | Unit |
|-----------|--|------------------------|------|
| V_{IN} | Input Voltage | 9.0 | V |
| V_{CE} | Input Voltage for \overline{CE} /CE Pin (applied to A/B version) | -0.3 to $V_{IN} + 0.3$ | V |
| V_{OUT} | Output Voltage | -0.3 to $V_{IN} + 0.3$ | V |
| I_{OUT} | Output Current | 150 | mA |
| P_D | Power Dissipation (SC-82AB) * | 380 | mW |
| | Power Dissipation (SON1612-6) * | 500 | |
| T_{opt} | Operating Temperature | -40 to +85 | °C |
| T_{stg} | Storage Temperature | -55 to +125 | °C |

*) For Power Dissipation, please refer to PACKAGE INFORMATION.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

ELECTRICAL CHARACTERISTICS

• Rx5RW30A

Topt=25°C

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|--|---|-------|-------|-------|------------|
| V _{OUT} | Output Voltage | V _{IN} =5.0V 10μA≤I _{OUT} ≤10mA | 2.940 | 3.000 | 3.060 | V |
| I _{OUT} | Output Current | V _{IN} =5.0V | 50 | | | mA |
| ΔV _{OUT} /ΔI _{OUT} | Load Regulation | V _{IN} =5.0V, 1mA≤I _{OUT} ≤50mA | | 40 | 60 | mV |
| V _{DIF} | Dropout Voltage | I _{OUT} =1mA | | 40 | 60 | mV |
| I _{SS} | Supply Current | V _{IN} =5.0V | | 1.5 | 3.0 | μA |
| I _{standby} | Standby Current | V _{IN} =5.0V, V _{CE} =5.0V | | 0.1 | 1.0 | μA |
| ΔV _{OUT} /ΔV _{IN} | Line Regulation | I _{OUT} =1mA V _{OUT} +0.5V≤V _{IN} ≤8V | 0 | 0.05 | 0.20 | %/V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} /ΔT _{opt} | Output Voltage Temperature Coefficient | I _{OUT} =10mA -40°C≤T _{opt} ≤85°C | | ±100 | | ppm/ °C |
| I _{SC} | Short Current Limit | | | 40 | | mA |
| R _{PU} | Pull up resistance for CE pin | | 1.5 | 4.0 | 12.0 | MΩ |
| V _{CEH} | CE Input Voltage "H" | | 1.5 | | | V |
| V _{CEL} | CE Input Voltage "L" | | | | 0.25 | V |

• Rx5RW30B

Topt=25°C

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|--|---|-------|-------|-------|------------|
| V _{OUT} | Output Voltage | V _{IN} =5.0V 10μA≤I _{OUT} ≤10mA | 2.940 | 3.000 | 3.060 | V |
| I _{OUT} | Output Current | V _{IN} =5.0V | 50 | | | mA |
| ΔV _{OUT} /ΔI _{OUT} | Load Regulation | V _{IN} =5.0V 1mA≤I _{OUT} ≤50mA | | 40 | 60 | mV |
| V _{DIF} | Dropout Voltage | I _{OUT} =1mA | | 40 | 60 | mV |
| I _{SS} | Supply Current | V _{IN} =5.0V | | 1.5 | 3.0 | μA |
| I _{standby} | Standby Current | V _{IN} =5.0V, V _{CE} =GND | | 0.1 | 1.0 | μA |
| ΔV _{OUT} /ΔV _{IN} | Line Regulation | I _{OUT} =1mA V _{OUT} +0.5V≤V _{IN} ≤8V | 0 | 0.05 | 0.20 | %/V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} /ΔT _{opt} | Output Voltage Temperature Coefficient | I _{OUT} =1mA -40°C≤T _{opt} ≤85°C | | ±100 | | ppm/ °C |
| I _{SC} | Short Current Limit | | | 40 | | mA |
| R _{PD} | Pull down resistance for CE pin | | 1.5 | 4.0 | 12.0 | MΩ |
| V _{CEH} | CE Input Voltage "H" | | 1.5 | | | V |
| V _{CEL} | CE Input Voltage "L" | | | | 0.25 | V |

Rx5RW

• Rx5RW30C

Topt=25°C

| Symbol | Item | Conditions | Min. | Tyo. | Max. | Unit |
|--------------------------------------|--|--|-------|-------|-------|------------|
| V _{OUT} | Output Voltage | V _{IN} =5.0V 10μA≤I _{OUT} ≤10mA | 2.940 | 3.000 | 3.060 | V |
| I _{OUT} | Output Current | V _{IN} =5.0V | 50 | | | mA |
| ΔV _{OUT} /ΔI _{OUT} | Load Regulation | V _{IN} =5.0V 1mA≤I _{OUT} ≤50mA | | 40 | 60 | mV |
| V _{DIF} | Dropout Voltage | I _{OUT} =1mA | | 40 | 60 | mV |
| I _{SS} | Supply Current | V _{IN} =5.0V | | 1.5 | 3.0 | μA |
| ΔV _{OUT} /ΔV _{IN} | Line Regulation | I _{OUT} =1mA 3.5V≤V _{IN} ≤8.0V | 0 | 0.05 | 0.20 | %/V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} /ΔT _{opt} | Output Voltage Temperature Coefficient | I _{OUT} =10mA -40°C≤T _{opt} ≤85°C | | ±100 | | ppm/ °C |
| I _{SC} | Short Current Limit | | | 40 | | mA |

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE

Topt=25°C

| Part Number | Output Voltage | | | | Output Current | | Load Regulation | | | Dropout Voltage | | |
|-------------|-----------------------------------|-------|-------|-------|----------------------------------|------|----------------------------------|------|------|-----------------|--------------|-------------|
| | VOUT (V) | | | | IOUT (mA) | | ΔVout/ΔIout (mV) | | | VDIF (mV) | | |
| | Conditions | Min. | Typ. | Max. | Conditions | Min. | Conditions | Typ. | Max. | Conditions | Typ. | Max. |
| Rx5RW15 | VIN-VOUT =2.0V 10μA≤IOUT ≤10mA | 1.470 | 1.500 | 1.530 | VIN-VOUT =2.0V 1mA≤IOUT ≤35mA | 35 | VIN-VOUT =2.0V 1mA≤IOUT ≤50mA | 30 | 45 | IOUT=1mA | 120 | 200 |
| Rx5RW16 | | 1.568 | 1.600 | 1.632 | | | | | | | 90 | 135 |
| Rx5RW17 | | 1.666 | 1.700 | 1.734 | | | | | | | 60 | 90 |
| Rx5RW18 | | 1.764 | 1.800 | 1.836 | | | | | | | 50 | 75 |
| Rx5RW19 | | 1.862 | 1.900 | 1.938 | | | | | | | 40 | 60 |
| Rx5RW20 | | 1.960 | 2.000 | 2.040 | | | | | | | 35 | 55 |
| Rx5RW21 | | 2.058 | 2.100 | 2.142 | | | | | | | 30 | 45 |
| Rx5RW22 | | 2.156 | 2.200 | 2.244 | | | | | | | 25 | 40 |
| Rx5RW23 | | 2.254 | 2.300 | 2.346 | | | | | | | 20 | 35 |
| Rx5RW24 | | 2.352 | 2.400 | 2.448 | | | | | | | 15 | 25 |
| Rx5RW25 | VIN-VOUT =2.0V 10μA≤IOUT ≤10mA | 2.450 | 2.500 | 2.550 | VIN-VOUT =2.0V 1mA≤IOUT ≤65mA | 50 | VIN-VOUT =2.0V 1mA≤IOUT ≤80mA | 50 | 70 | IOUT=1mA | 12 | 20 |
| Rx5RW26 | | 2.548 | 2.600 | 2.652 | | | | | | | 10 | 18 |
| Rx5RW27 | | 2.646 | 2.700 | 2.754 | | | | | | | 8 | 15 |
| Rx5RW28 | | 2.744 | 2.800 | 2.856 | | | | | | | 6 | 12 |
| Rx5RW29 | | 2.842 | 2.900 | 2.958 | | | | | | | 4 | 8 |
| Rx5RW30 | | 2.940 | 3.000 | 3.060 | | | | | | | 3 | 6 |
| Rx5RW31 | | 3.038 | 3.100 | 3.162 | | | | | | | 2 | 4 |
| Rx5RW32 | | 3.136 | 3.200 | 3.264 | | | | | | | 1 | 2 |
| Rx5RW33 | | 3.234 | 3.300 | 3.366 | | | | | | | 0.5 | 1 |
| Rx5RW34 | | 3.332 | 3.400 | 3.468 | | | | | | | 0.2 | 0.5 |
| Rx5RW35 | VIN-VOUT =2.0V 10μA≤IOUT ≤10mA | 3.430 | 3.500 | 3.570 | VIN-VOUT =2.0V 1mA≤IOUT ≤65mA | 65 | VIN-VOUT =2.0V 1mA≤IOUT ≤80mA | 60 | 90 | IOUT=1mA | 0.1 | 0.2 |
| Rx5RW36 | | 3.528 | 3.600 | 3.672 | | | | | | | 0.05 | 0.1 |
| Rx5RW37 | | 3.626 | 3.700 | 3.774 | | | | | | | 0.02 | 0.05 |
| Rx5RW38 | | 3.724 | 3.800 | 3.876 | | | | | | | 0.01 | 0.02 |
| Rx5RW39 | | 3.822 | 3.900 | 3.978 | | | | | | | 0.005 | 0.01 |
| Rx5RW40 | | 3.920 | 4.000 | 4.080 | | | | | | | 0.002 | 0.005 |
| Rx5RW41 | | 4.018 | 4.100 | 4.182 | | | | | | | 0.001 | 0.002 |
| Rx5RW42 | | 4.116 | 4.200 | 4.284 | | | | | | | 0.0005 | 0.001 |
| Rx5RW43 | | 4.214 | 4.300 | 4.386 | | | | | | | 0.0002 | 0.0005 |
| Rx5RW44 | | 4.312 | 4.400 | 4.488 | | | | | | | 0.0001 | 0.0002 |
| Rx5RW45 | VIN-VOUT =2.0V 10μA≤IOUT ≤10mA | 4.410 | 4.500 | 4.590 | VIN-VOUT =2.0V 1mA≤IOUT ≤65mA | 80 | VIN-VOUT =2.0V 1mA≤IOUT ≤80mA | 60 | 90 | IOUT=1mA | 0.00005 | 0.0001 |
| Rx5RW46 | | 4.508 | 4.600 | 4.692 | | | | | | | 0.00002 | 0.00005 |
| Rx5RW47 | | 4.606 | 4.700 | 4.794 | | | | | | | 0.00001 | 0.00002 |
| Rx5RW48 | | 4.704 | 4.800 | 4.896 | | | | | | | 0.000005 | 0.00001 |
| Rx5RW49 | | 4.802 | 4.900 | 4.998 | | | | | | | 0.000002 | 0.000005 |
| Rx5RW50 | | 4.900 | 5.000 | 5.100 | | | | | | | 0.000001 | 0.000002 |
| Rx5RW51 | | 4.998 | 5.100 | 5.202 | | | | | | | 0.0000005 | 0.000001 |
| Rx5RW52 | | 5.096 | 5.200 | 5.304 | | | | | | | 0.0000002 | 0.0000005 |
| Rx5RW53 | | 5.194 | 5.300 | 5.406 | | | | | | | 0.0000001 | 0.0000002 |
| Rx5RW54 | | 5.292 | 5.400 | 5.508 | | | | | | | 0.00000005 | 0.0000001 |
| Rx5RW55 | VIN-VOUT =2.0V 10μA≤IOUT ≤10mA | 5.390 | 5.500 | 5.610 | VIN-VOUT =2.0V 1mA≤IOUT ≤65mA | 65 | VIN-VOUT =2.0V 1mA≤IOUT ≤80mA | 50 | 70 | IOUT=1mA | 0.00000002 | 0.00000005 |
| Rx5RW56 | | 5.488 | 5.600 | 5.712 | | | | | | | 0.00000001 | 0.00000002 |
| Rx5RW57 | | 5.586 | 5.700 | 5.814 | | | | | | | 0.000000005 | 0.00000001 |
| Rx5RW58 | | 5.684 | 5.800 | 5.916 | | | | | | | 0.000000002 | 0.000000005 |
| Rx5RW59 | | 5.782 | 5.900 | 6.018 | | | | | | | 0.000000001 | 0.000000002 |
| Rx5RW60 | | 5.880 | 6.000 | 6.120 | | | | | | | 0.0000000005 | 0.000000001 |

ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE

(common characteristics)


Topt=25°C

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|--|--|------|------|------|--------|
| I _{SS} | Supply Current | V _{IN} =Set V _{OUT} +2.0 | | 1.5 | 3.0 | μA |
| I _{Standby} | Standby Current | V _{IN} =Set V _{OUT} +2.0V V _{CE} =V _{IN} (Rx5RWxxA), V _{CE} =GND (Rx5RWxxB) | | 0.1 | 1.0 | μA |
| ΔV _{OUT} /ΔV _{IN} | Line Regulation | I _{OUT} =1mA Set V _{OUT} +0.5V≤V _{IN} ≤8V | 0 | 0.05 | 0.20 | %/V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} /ΔT _{opt} | Output Voltage Temperature Coefficient | I _{OUT} =10mA -40°C≤T _{opt} ≤85°C | | ±100 | | ppm/°C |
| I _{SC} | Short Current Limit | | | 40 | | mA |
| R _{PU} /R _{PD} | CE Pull-up / CE Pull-down Resistance | applied to A/B version | 1.5 | 4.0 | 12.0 | MΩ |
| V _{CEH} | CE /CE Input Voltage "H" | applied to A/B version | 1.5 | | | V |
| V _{CEL} | CE /CE Input Voltage "L" | applied to A/B version | | | 0.25 | V |

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.





OPERATION

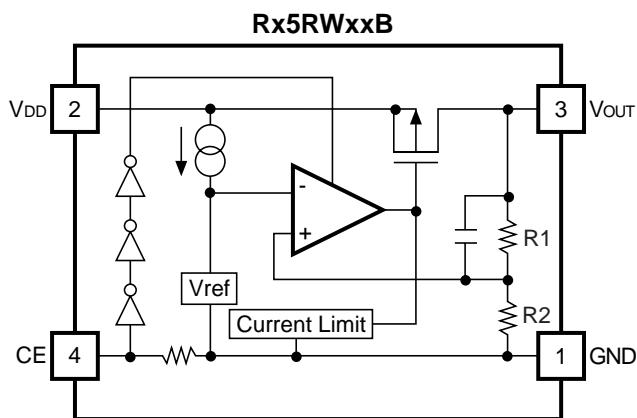


In these ICs, output voltage V_{OUT} is detected by Feedback Registers R1, R2, and the detected output voltage is compared with a reference voltage by the error amplifier, so that a constant voltage is output.

A current limit circuit working for short protect, and a chip enable circuit are included.

TEST CIRCUITS

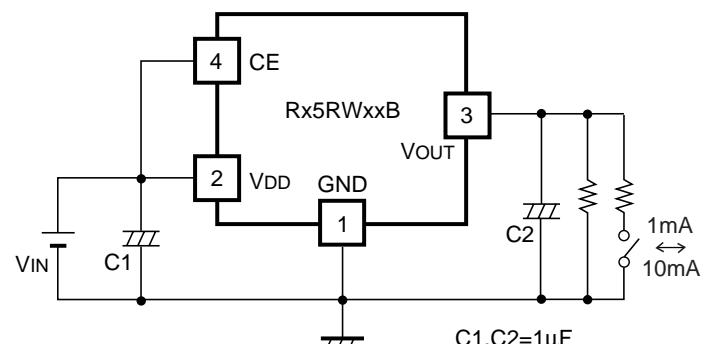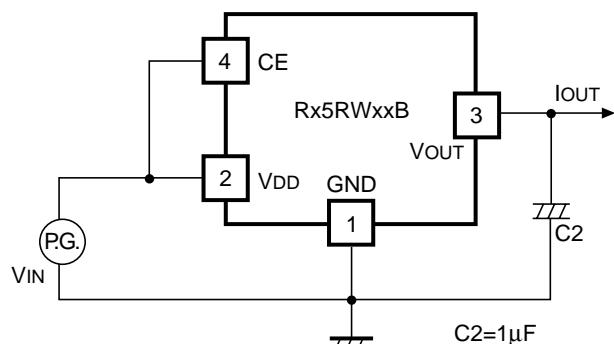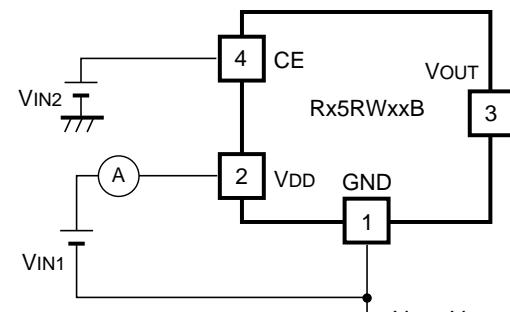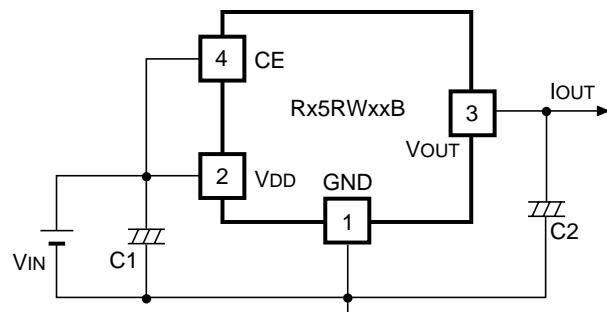

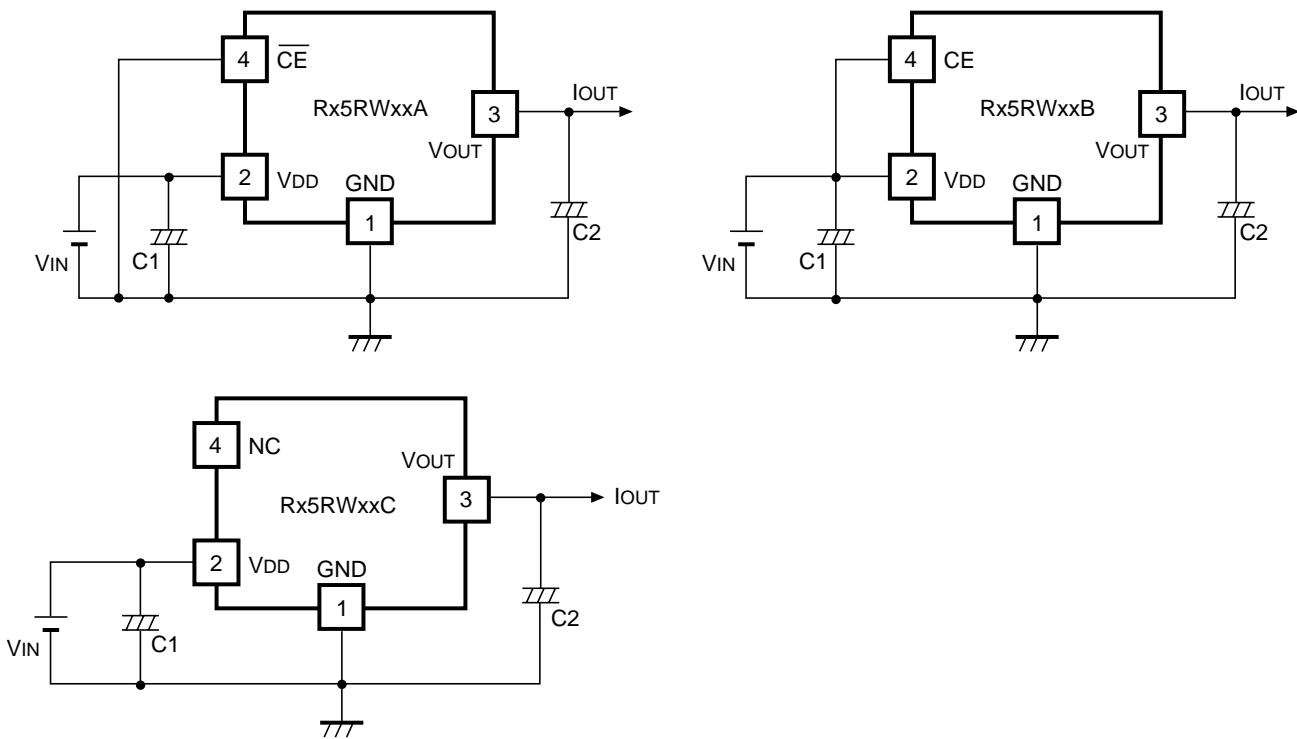TYPICAL APPLICATION


In Rx5RW Series, a constant voltage can be obtained without using capacitors, C_1 and C_2 . However, when the wire connected V_{IN} is long, use capacitor C_1 . Output noise can be reduced with using capacitor 2.

Insert capacitors C_1 and C_2 with the capacitance of $0.1\mu F$ to $2\mu F$ between input/output pins and GND pin with minimum wiring.


TYPICAL CHARACTERISTICS

1) Output Voltage vs. Output Current


Rx5RW30B

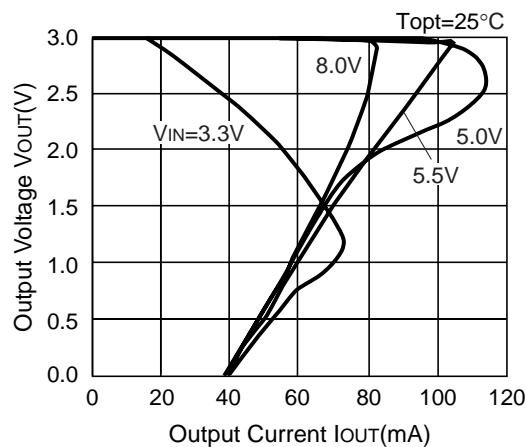


Rx5RW30B

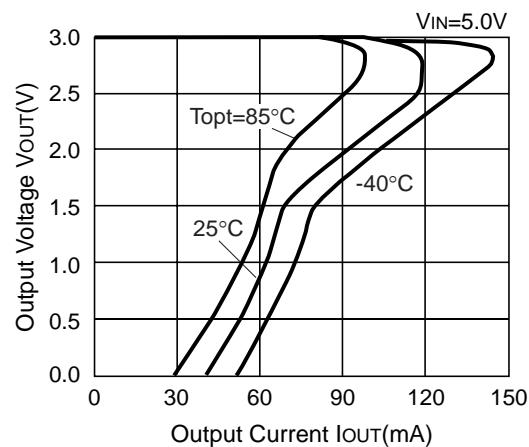


Rx5RW40B

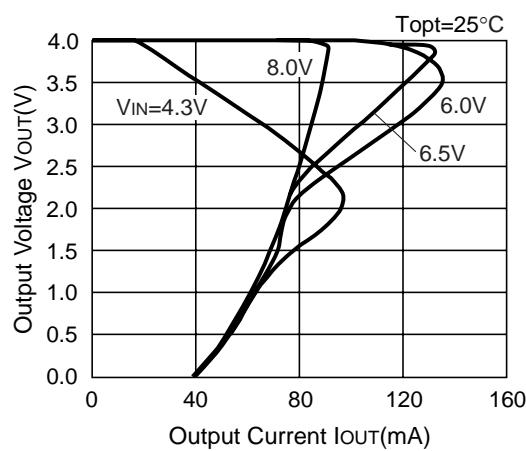


Rx5RW40B

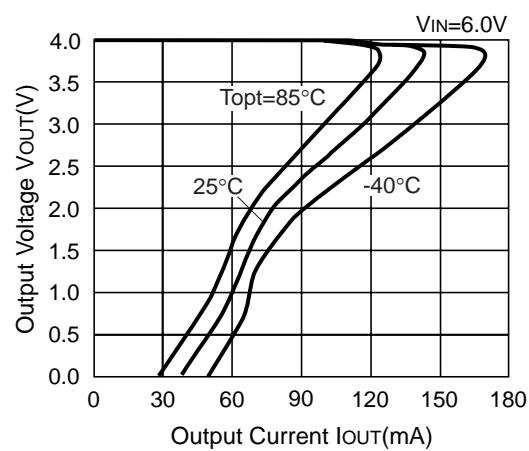

Rx5RW50B

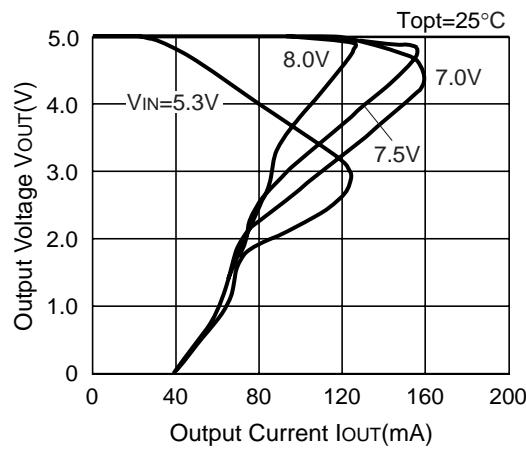


Rx5RW50B

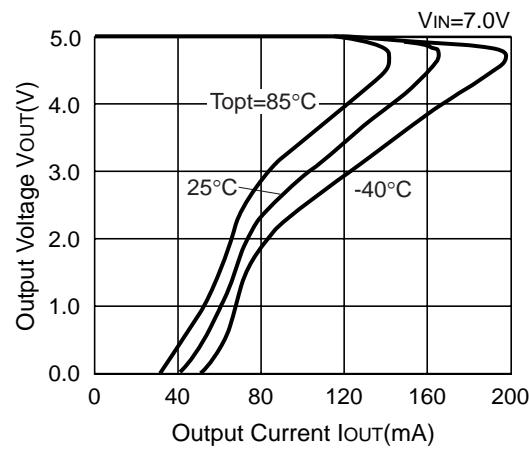


Rx5RW

2) Output Voltage vs. Input Voltage


Rx5RW30B

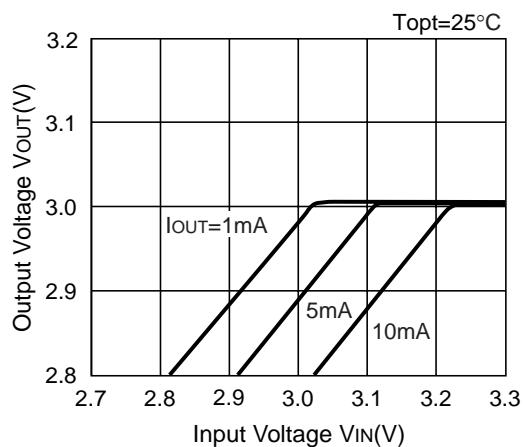


Rx5RW30B

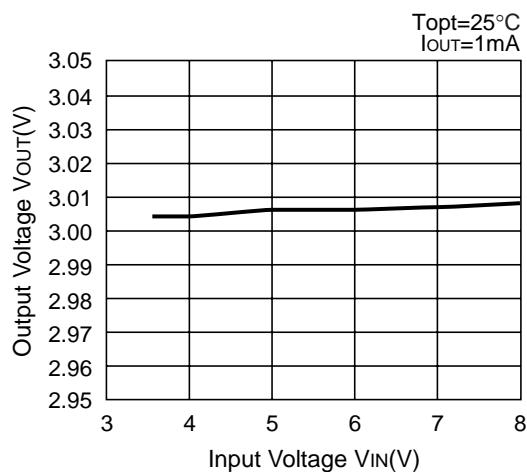


Rx5RW40B

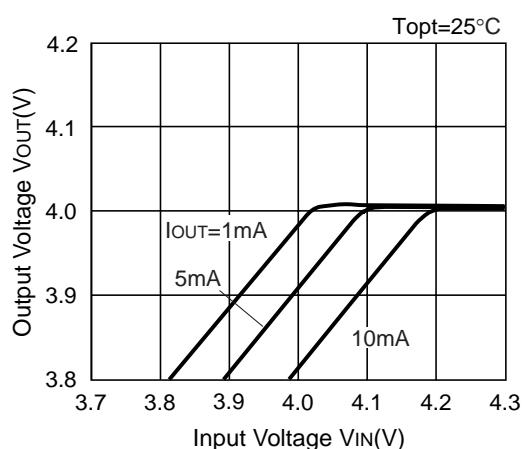


Rx5RW40B





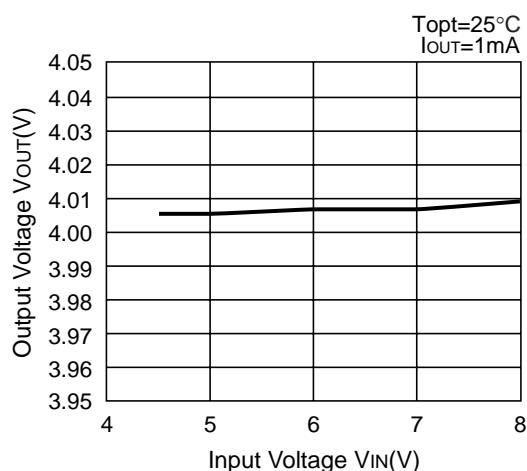


Rx5RW50B

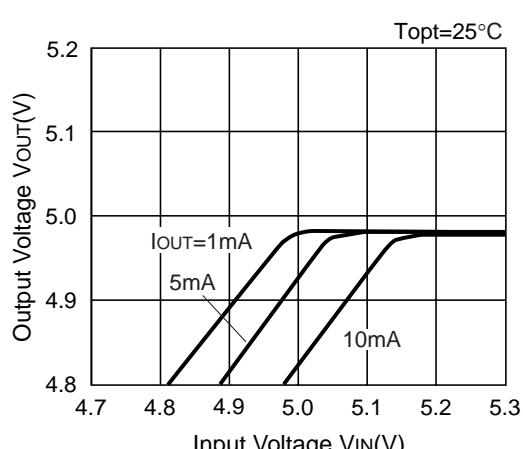


Rx5RW50B

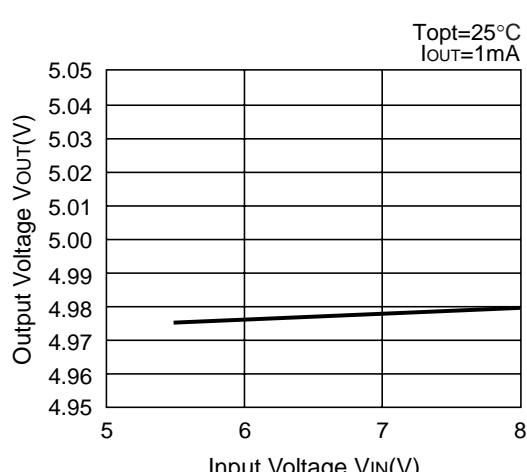

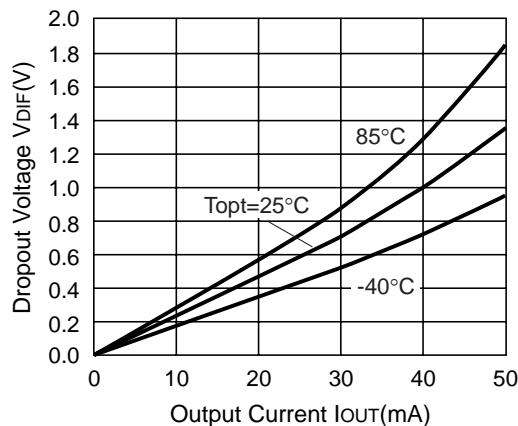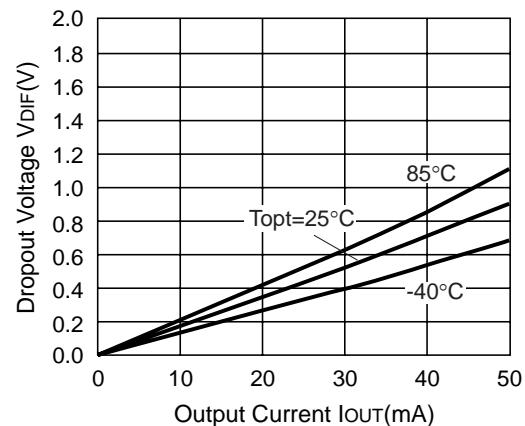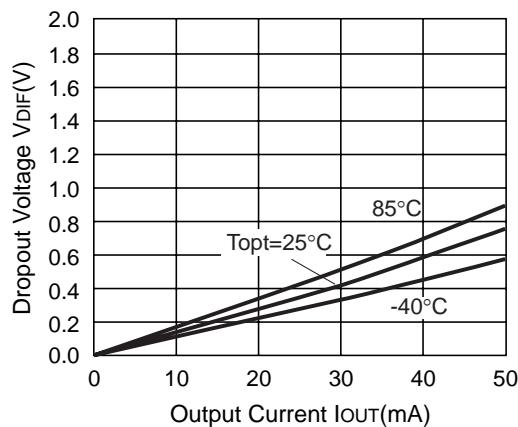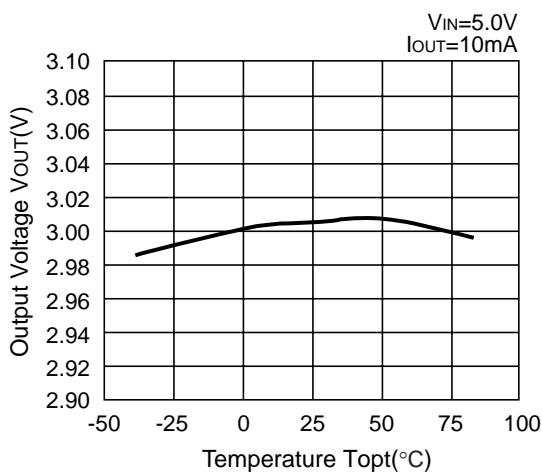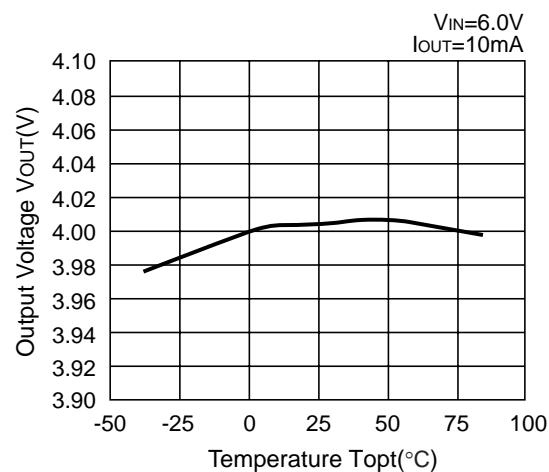3) Dropout Voltage vs. Output Current**Rx5RW30B****Rx5RW40B****Rx5RW50B****4) Output Voltage vs. Temperature****Rx5RW30B****Rx5RW40B**


Rx5RW

Rx5RW50B

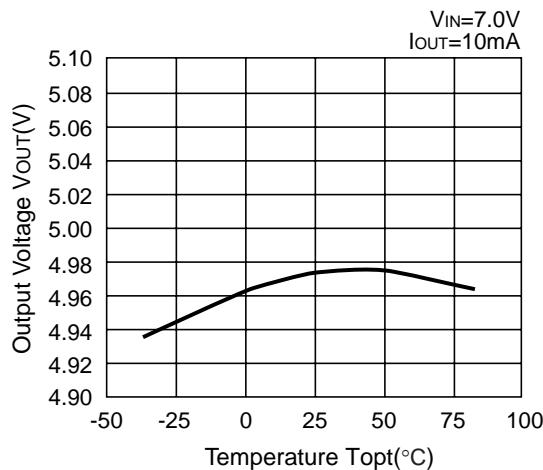


5) Supply Current vs. Input Voltage


Rx5RW30B




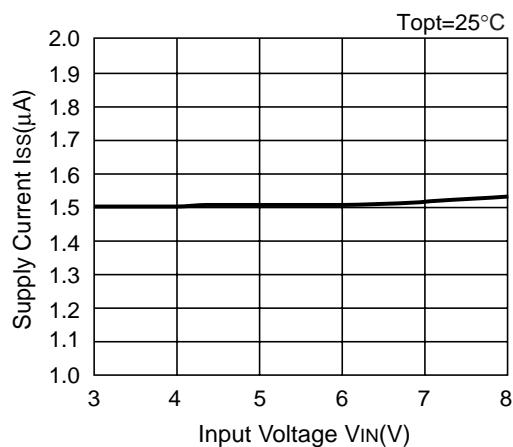


Rx5RW40B

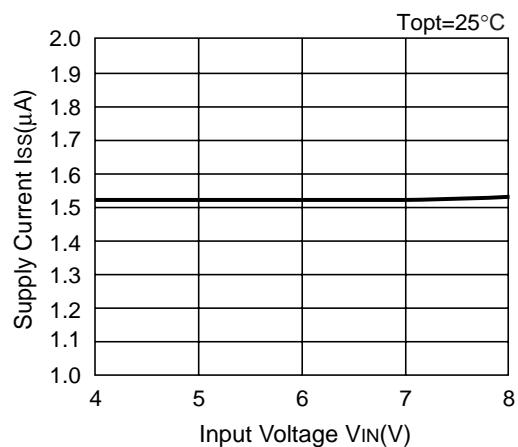

Rx5RW50B

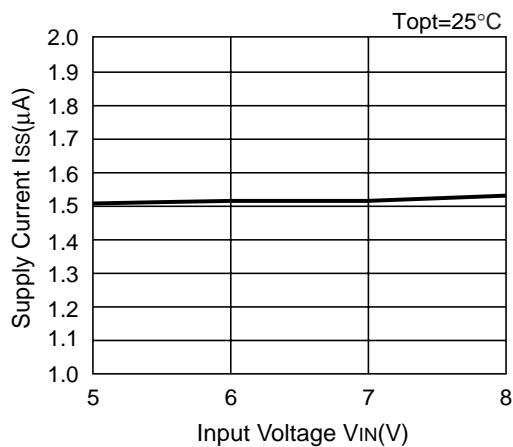


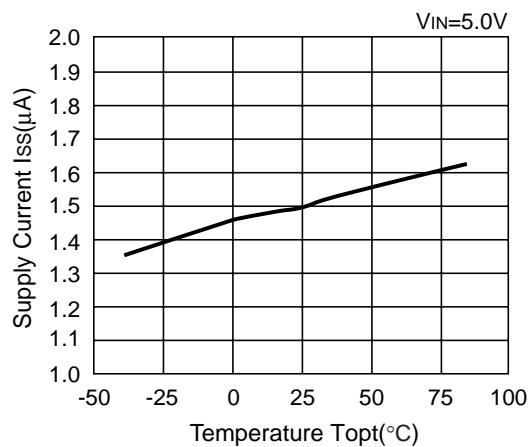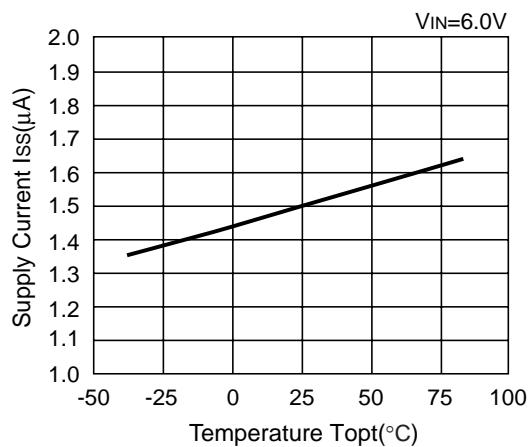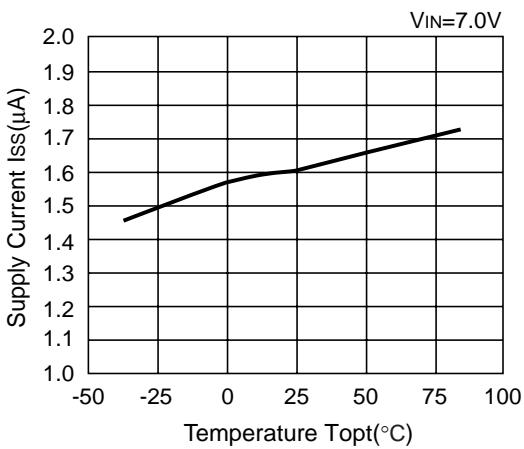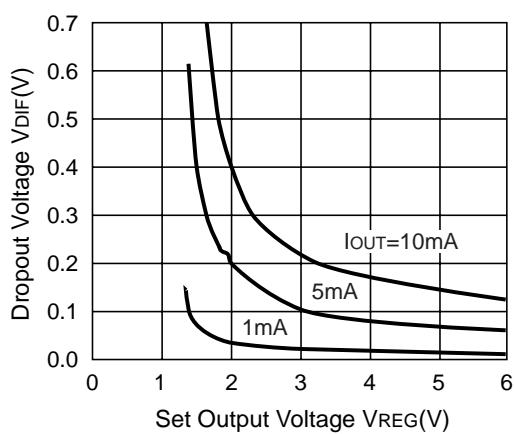6) Supply Current vs. Temperature**Rx5RW30B****Rx5RW40B****Rx5RW50B****7) Dropout Voltage vs. Set Output Voltage****Rx5RWxxB**


Rx5RW

8) Line Transient Response


Rx5RW30B

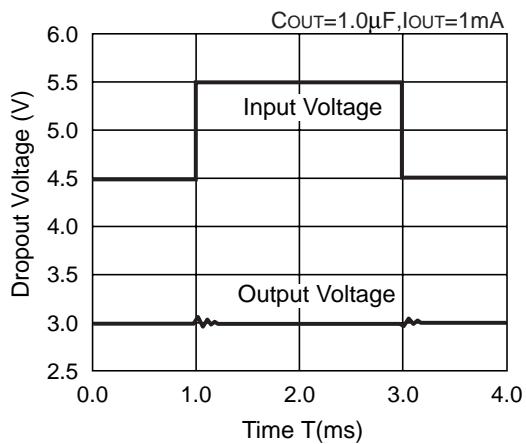


Rx5RW30B

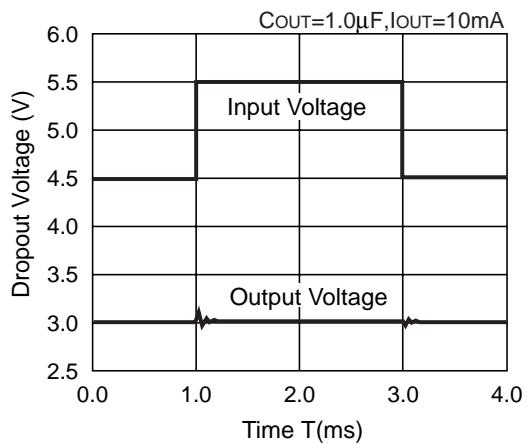


Rx5RW40B

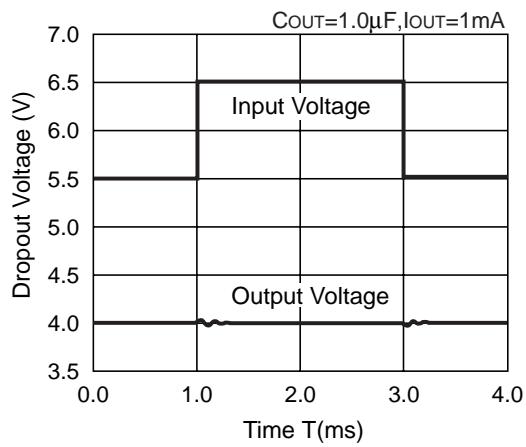


Rx5RW40B



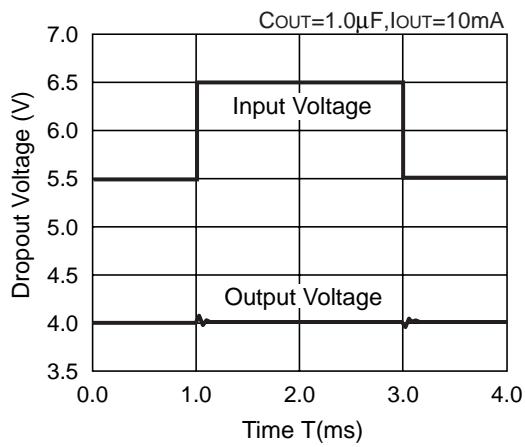





Rx5RW50B

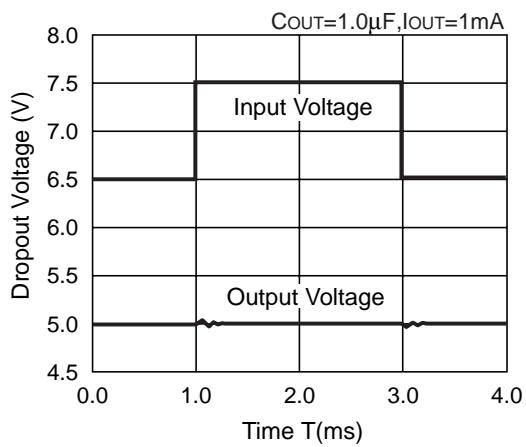

Rx5RW50B

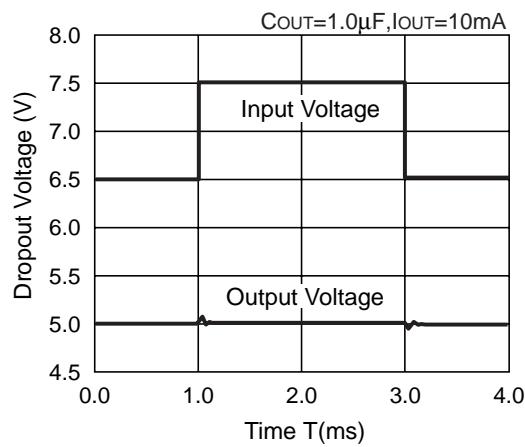

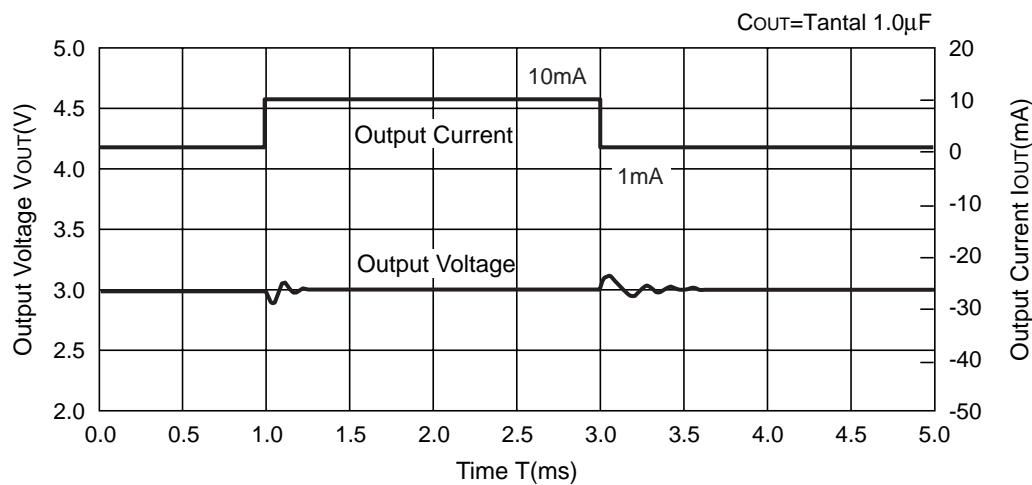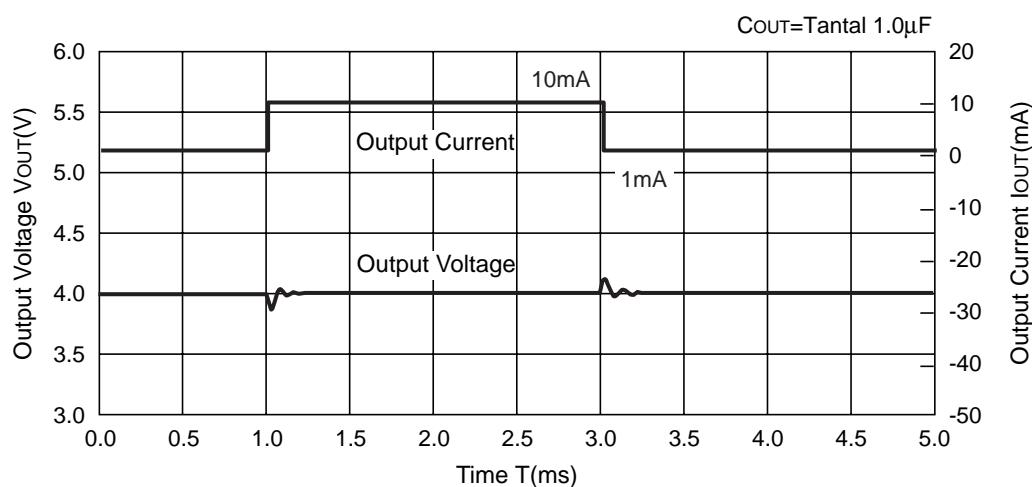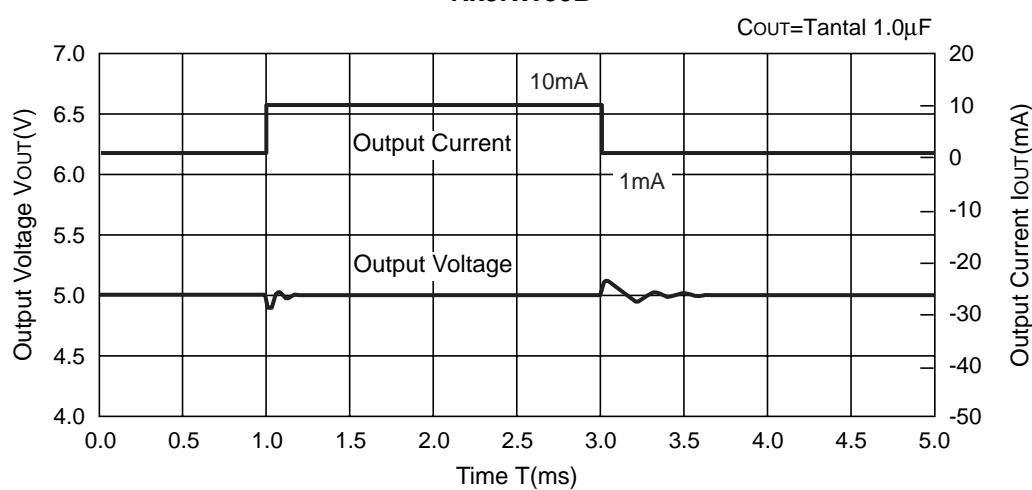9) Load Transient Response**Rx5RW30B****Rx5RW40B****Rx5RW50B**

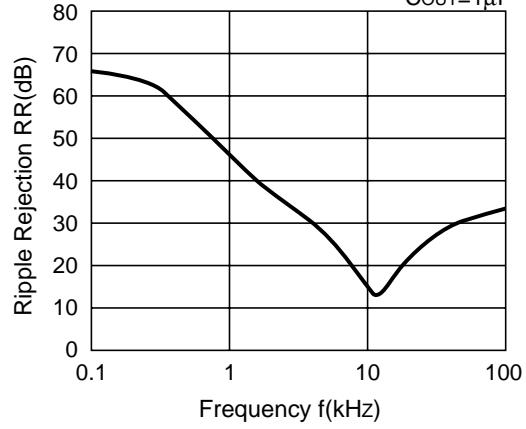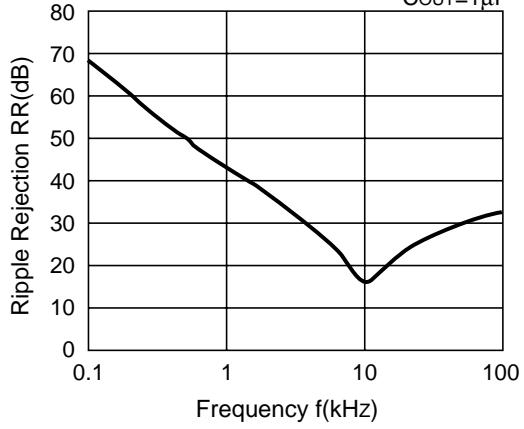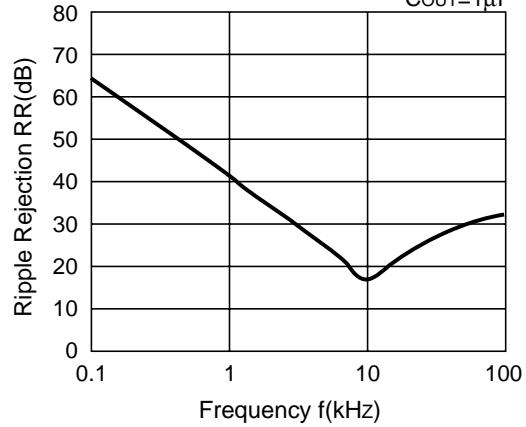10) Ripple Rejection**Rx5RW30B** $V_{IN}=5Vdc+0.5Vp-p$
 $I_{OUT}=10mA$
 $C_{OUT}=1\mu F$ **Rx5RW40B** $V_{IN}=6Vdc+0.5Vp-p$
 $I_{OUT}=10mA$
 $C_{OUT}=1\mu F$ **Rx5RW50B** $V_{IN}=7Vdc+0.5Vp-p$
 $I_{OUT}=10mA$
 $C_{OUT}=1\mu F$ 



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to our sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of our company.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under our company's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact our sales or our distributor before attempting to use AOI.
11. Please contact our sales representatives should you have any questions or comments concerning the products or the technical information.



Nisshinbo Micro Devices Inc.

Official website

<https://www.nisshinbo-microdevices.co.jp/en/>

Purchase information

<https://www.nisshinbo-microdevices.co.jp/en/buy/>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LDO Voltage Regulators category:

Click to view products by Nissinbo manufacturer:

Other Similar products are found below :

[AP7363-SP-13](#) [NCV8664CST33T3G](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TLF4949EJ](#)
[NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [LP2951CN](#) [NCV4269CPD50R2G](#) [AP7315-25W5-7](#) [NCV47411PAAJR2G](#) [AP2111H-1.2TRG1](#)
[ZLDO1117QK50TC](#) [AZ1117ID-ADJTRG1](#) [NCV4263-2CPD50R2G](#) [NCP706ABMX300TAG](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#)
[TLE4471GXT](#) [AP7315-33SA-7](#) [NCV4266-2CST33T3G](#) [NCP715SQ15T2G](#) [NCV8623MN-50R2G](#) [NCV563SQ18T1G](#) [NCV8664CDT33RKG](#)
[NCV4299CD250R2G](#) [NCP715MX30TBG](#) [NCV8702MX25TCG](#) [TLE7270-2E](#) [NCV562SQ25T1G](#) [AP2213D-3.3TRG1](#) [AP2202K-2.6TRE1](#)
[NCV8170BMX300TCG](#) [NCV8152MX300180TCG](#) [NCP700CMT45TBG](#) [AP7315-33W5-7](#) [NCP154MX180300TAG](#) [AP2113AMTR-G1](#)
[NJW4104U2-33A-TE1](#) [MP2013AGG-5-P](#) [NCV8775CDT50RKG](#) [NJM2878F3-45-TE1](#) [S-19214B00A-V5T2U7](#) [S-19214B50A-V5T2U7](#) [S-19213B50A-V5T2U7](#) [S-19214BC0A-E8T1U7*1](#) [S-19213B00A-V5T2U7](#) [S-19213B33A-V5T2U7](#)