



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089

NTE128P (NPN) & NTE129P (PNP) Silicon Complementary Transistors General Purpose Amp

Description:

The NTE128P (NPN) and NTE129P (PNP) are silicon complementary transistors designed for use in general purpose power amplifier and switching applications.

Features:


- High V_{CE} Ratings
- Exceptional Power Dissipation Capability

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector–Base Voltage, V_{CBO}	100V
Collector–Emitter Voltage, V_{CEO}	80V
Emitter–Base Voltage, V_{EBO}	5V
Continuous Collector Current , I_C	1A
Power Dissipation, P_{TOT}	
$T_A = +25^\circ\text{C}$	0.850W
$T_C = +25^\circ\text{C}$	2W
Operating Junction Temperature Range, T_J	-55° to +150°C
Storage Temperature Range, T_{stg}	-55° to +150°C
Thermal Resistance, Junction–to–Ambient, R_{thJA}	147°C/W
Thermal Resistance, Junction–to–Case, R_{thJC}	62.5°C/W

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector–Emitter Breakdown Voltage	BV_{CEO}	$I_C = 10\text{mA}$, $I_B = 0$	80	—	—	V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 80\text{V}$	—	—	100	nA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 4\text{V}$	—	—	100	nA
DC Current Gain	h_{FE}	$I_C = 10\text{mA}$, $V_{CE} = 2\text{V}$	100	—	—	
		$I_C = 350\text{mA}$, $V_{CE} = 2\text{V}$	100	—	300	
Collector–Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 350\text{mA}$	—	—	0.35	V
Current Gain Bandwidth Product	f_T	$I_C = 50\text{mA}$	50	—	—	
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}$, $I_E = 0$, $f = 1\text{MHz}$	—	—	15	pF

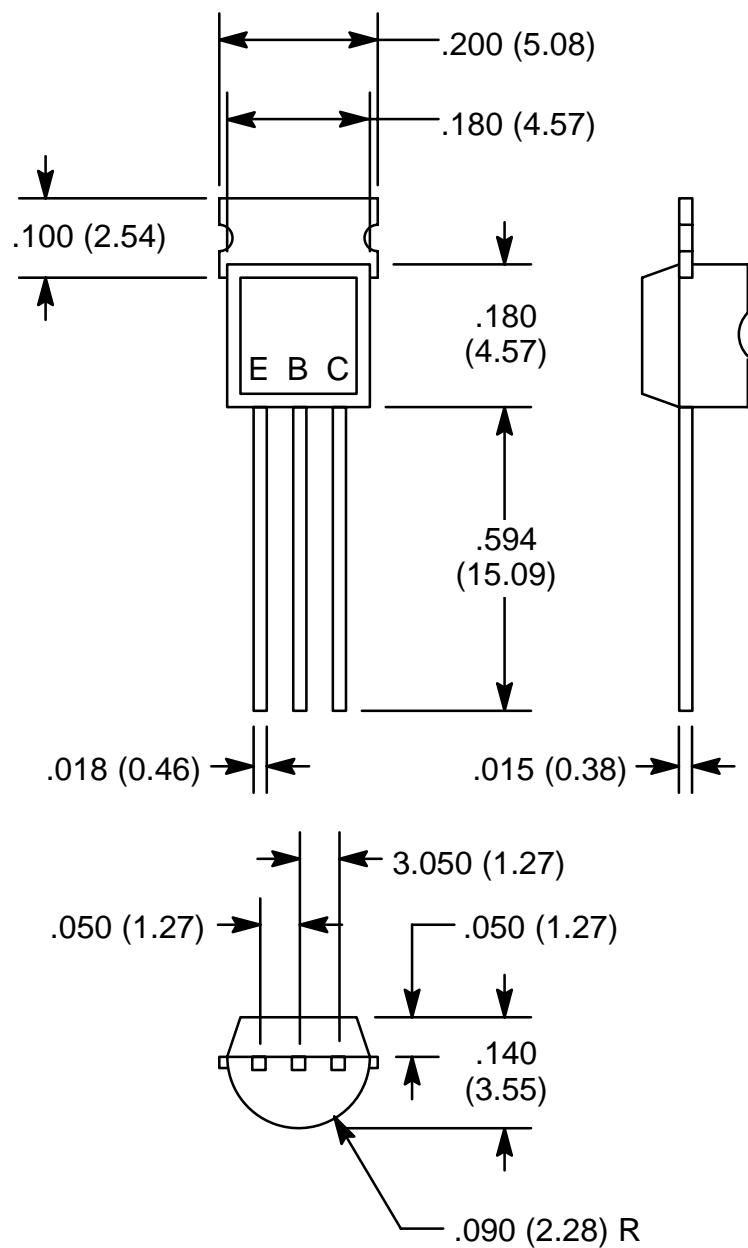

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by NTE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)