



COTS Micro-D Vertical Mount (Straight) Printed Circuit Board Connectors Metal Shell, .100 Inch Pitch

- .100 Inch by .100 Inch Grid
- .020 Inch Diameter Pre-Tinned Tails
- Environmentally Sealed
- 9 through 100 Contacts

See Appendix for layout information.



RELATED INFORMATION

Performance Specifications	IBC*
Materials and Finishes	IBC*
Contact Arrangements	7-8
Panel Cutouts, Mounting Dimensions	9

* Available on the Inside Back Cover Fold-Out

HOW TO ORDER


Conn. Series	Shell Plating Table III*	Insert Material Table I*	No. of Contacts	Contact Type	Termination Style	Jackpost Option	Threaded Insert Option	Tail Length
MWDM	1 – Cadmium	L – LCP (Liquid Crystal Polymer)	9	P – Pin S – Socket	BS - Vertical Mount (Straight)	P R1 R2 R3 R4 (See Table Below) (Omit for None)	T - Threaded Insert in Board Mount Hole (Omit for None)	.110
	2 – Nickel		15					.150
	4 – Black Anodize		21					.190
	5 – Gold		25					.250
	6 – Chem Film		31					
			37					
			51					
	100							
Sample Part Number:								
MWDM	1	L	— 51	P	BS	P	T —	.110

* SEE INSIDE BACK COVER FOLD-OUT FOR COMPLETE INFORMATION

JACKPOST OPTION

- | | |
|--|--|
| P - Standard Jackpost, Non-Removable | R3 - Jackpost for Rear-Mounting to .062" Panel |
| R1 - Jackpost for Rear-Mounting to .032" Panel | R4 - Jackpost for Rear-Mounting to .093" Panel |
| R2 - Jackpost for Rear-Mounting to .047" Panel | OMIT FOR NONE |

COTS Micro-D Vertical Mount (Straight) Printed Circuit Board Connectors Metal Shell, .100 Inch Pitch

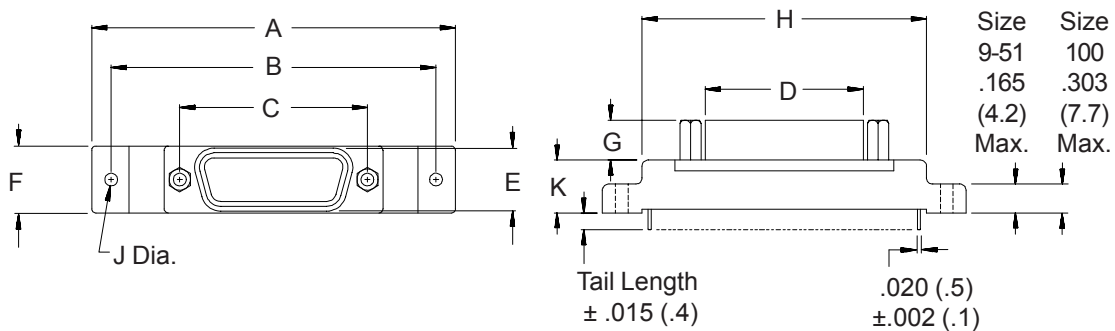

DIMENSIONS

Layout	A Max	B ± .007 (0.2)	C ± .005 (0.1)	D Max	E Ref
9P	1.390 (35.3)	1.150 (29.2)	.565 (14.4)	.333 (8.5)	.185 (4.7)
9S	1.390 (35.3)	1.150 (29.2)	.565 (14.4)	.400 (10.2)	.245 (6.2)
15P	1.390 (35.3)	1.150 (29.2)	.715 (18.2)	.483 (12.3)	.185 (4.7)
15S	1.390 (35.3)	1.150 (29.2)	.715 (18.2)	.551 (14.0)	.245 (6.2)
21P	1.690 (42.9)	1.450 (36.8)	.865 (22.0)	.633 (16.1)	.185 (4.7)
21S	1.690 (42.9)	1.450 (36.8)	.865 (22.0)	.701 (17.8)	.245 (6.2)
25P	1.740 (44.2)	1.500 (38.1)	.965 (24.5)	.733 (18.6)	.185 (4.7)
25S	1.740 (44.2)	1.500 (38.1)	.965 (24.5)	.801 (20.3)	.245 (6.2)
31P	2.040 (51.8)	1.800 (45.7)	1.115 (28.3)	.883 (22.4)	.185 (4.7)
31S	2.040 (51.8)	1.800 (45.7)	1.115 (28.3)	.951 (24.1)	.245 (6.2)
37P	2.340 (59.4)	2.100 (53.3)	1.265 (32.1)	1.033 (26.2)	.185 (4.7)
37S	2.340 (59.4)	2.100 (53.3)	1.265 (32.1)	1.101 (27.9)	.245 (6.2)
51P	2.280 (57.9)	2.000 (50.8)	1.215 (30.9)	.983 (25.0)	.230 (5.8)
51S	2.280 (57.9)	2.000 (50.8)	1.215 (30.9)	1.051 (26.7)	.290 (7.4)
100P	3.250 (82.6)	2.800 (71.1)	1.800 (45.7)	1.383 (35.1)	.271 (6.9)
100S	3.250 (82.3)	2.800 (71.1)	1.800 (45.7)	1.451 (36.9)	.330 (8.4)

Layout	F Max	G Max	H Max	J Dia. ± .005 (0.1)	K Max
9P	.308 (7.8)	.186 (4.7)	.885 (22.5)	.096 (2.4)	.355 (9.0)
9S	.308 (7.8)	.204 (5.2)	.885 (22.5)	.096 (2.4)	.355 (9.0)
15P	.308 (7.8)	.186 (4.7)	.945 (24.0)	.096 (2.4)	.355 (9.0)
15S	.308 (7.8)	.204 (5.2)	.945 (24.0)	.096 (2.4)	.355 (9.0)
21P	.308 (7.8)	.186 (4.7)	1.185 (30.1)	.096 (2.4)	.355 (9.0)
21S	.308 (7.8)	.204 (5.2)	1.185 (30.1)	.096 (2.4)	.355 (9.0)
25P	.308 (7.8)	.186 (4.7)	1.275 (32.4)	.096 (2.4)	.355 (9.0)
25S	.308 (7.8)	.204 (5.2)	1.275 (32.4)	.096 (2.4)	.355 (9.0)
31P	.308 (7.8)	.186 (4.7)	1.575 (40.0)	.096 (2.4)	.355 (9.0)
31S	.308 (7.8)	.204 (5.2)	1.575 (40.0)	.096 (2.4)	.355 (9.0)
37P	.308 (7.8)	.186 (4.7)	1.875 (47.6)	.096 (2.4)	.355 (9.0)
37S	.308 (7.8)	.204 (5.2)	1.875 (47.6)	.096 (2.4)	.355 (9.0)
51P	.351 (8.9)	.186 (4.7)	1.775 (45.1)	.096 (2.4)	.355 (9.0)
51S	.351 (8.9)	.204 (5.2)	1.775 (45.1)	.096 (2.4)	.355 (9.0)
100P	.460 (11.7)	.186 (4.7)	2.585 (40.3)	.145 (3.7)	.550 (14.0)
100S	.460 (11.7)	.204 (5.2)	2.585 (40.3)	.145 (3.7)	.550 (14.0)

Metric dimensions (mm) are indicated in parentheses.

© 2003 Glennair, Inc.

CAGE Codes 06324/0CA77

Printed in U.S.A.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Micro-D Connectors](#) category:

Click to view products by [Glenair](#) manufacturer:

Other Similar products are found below :

[M243082311F](#) [M2430834F](#) [M24308/4-6F](#) [65-1920-15](#) [M83513/01-HN](#) [M83513/03-A10N](#) [M83513/03-B14C](#) [M83513/03-D09C](#) [M83513/03-D11N](#) [M83513/03-G02N](#) [M83513/03-G05N](#) [M83513/03-G08C](#) [M83513/03-G09N](#) [M83513/03-G12N](#) [M83513/03-H13N](#) [M83513/04-E15N](#) [M83513/04-G04C](#) [M83513/10-E01NP](#) [M83513/13-B01NP](#) [M83513/13-C01NN](#) [M83513/16-A01CP](#) [M83513/22-D01NP](#) [M83513/25-B01NP](#) [6R2004A30F015](#) [6R4006A28A120](#) [703006A13F060](#) [704002A03F200](#) [705001A13F120](#) [7-1532020-5](#) [748567-1-P](#) [MDB1-31SH003](#) [MDM-15PBS-L58](#) [MDM-15PCBRM7T](#) [MDM-15PH003B-A174](#) [75-068624-59S](#) [MDM-15PH034B](#) [MDM-15SH001L](#) [MDM-15SH004B](#) [MDM-21PH003K](#) [MDM-25PH003B-A174](#) [MDM-25PHW01F-A174](#) [MDM-37PH006L-A174](#) [MDM-37PH048M5-A174](#) [MDM-37SCBRP-A174](#) [MDM-51PBS-L56](#) [MDM-51PSF](#) [MDM-51SH003M7](#) [MDM-51SSM7-A174](#) [MDM-9PBSP-L58](#) [MDM-9PH003M7](#)