



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## NTE218 Silicon PNP Transistor Audio Power Output

**Description:**

The NTE218 is ideal for use as a driver, switch and medium-power amplifier applications. This device features:

**Features:**

- Low Saturation Voltage –  $0.6V_{CE(sat)}$  @  $I_C = 1A$
- High Gain Characteristics –  $h_{FE}$  @  $I_C = 250mA$ : 30–100
- Excellent Safe Area Limits

**Absolute Maximum Ratings:**

Collector–Emitter Voltage, $V_{CEO}$ .....	80V
Collector–Base Voltage, $V_{CB}$ .....	80V
Emitter–Base Voltage, $V_{EB}$ .....	7V
Collector Current, $I_C$	
Continuous .....	4A
Peak (Note 1) .....	10A
Base Current, $I_B$ .....	2A
Total Device Dissipation ( $T_C = +25^\circ C$ ), $P_D$ .....	25W
Derate above $25^\circ C$ .....	0.143W/ $^\circ C$
Operating Junction Temperature Range, $T_J$ .....	$-65^\circ$ to $+200^\circ C$
Storage Temperature Range, $T_{stg}$ .....	$-65^\circ$ to $+200^\circ C$

Note 1 Pulse Test: Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2.0\%$ .


**Electrical Characteristics:** ( $T_C = +25^\circ C$  unless otherwise sepcified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>OFF Characteristics</b>						
Colector–Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 100mA, I_B = 0, \text{Note 1}$	80	–	–	V
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 7V$	–	–	0.5	mA
Collector Cutoff Current	$I_{CEX}$	$V_{CE} = 80V, V_{BE(off)} = 1.5V$	–	–	100	$\mu A$
		$V_{CE} = 60V, V_{BE(off)} = 1.5V, T_C = +150^\circ C$	–	–	1.0	mA
	$I_{CEO}$	$V_{CE} = 60V, I_B = 0$	–	–	1.0	mA
	$I_{CBO}$	$V_{CB} = 80V, I_E = 0$	–	–	100	$\mu A$

**Electrical Characteristics (Cont'd):** ( $T_C = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>ON Characteristics (Note 1)</b>						
DC Current Gain	$h_{FE}$	$V_{CE} = 1\text{V}, I_C = 100\text{mA}$	40	-	-	
		$V_{CE} = 1\text{V}, I_C = 250\text{mA}$	30	-	100	
		$V_{CE} = 1\text{V}, I_C = 500\text{mA}$	20	-	-	
		$V_{CE} = 1\text{V}, I_C = 1\text{A}$	10	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 1\text{A}, I_B = 125\text{mA}$	-	-	0.6	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE} = 1\text{V}, I_C = 250\text{mA}$	-	-	1.0	V
<b>Transient Characteristics</b>						
Current Gain Bandwidth Product	$f_T$	$V_{CE} = 1\text{V}, I_C = 250\text{mA}, f = 1\text{MHz}$	3	-	-	MHz
Common Base Output Capacitance	$C_{ob}$	$V_{CE} = 10\text{V}, I_C = 0, f = 100\text{kHz}$	-	-	100	pF
Small-Signal Current Gain	$h_{fe}$	$V_{CE} = 10\text{V}, I_C = 50\text{mA}, f = 1\text{kHz}$	25	-	-	

Note 1 Pulse Test: Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

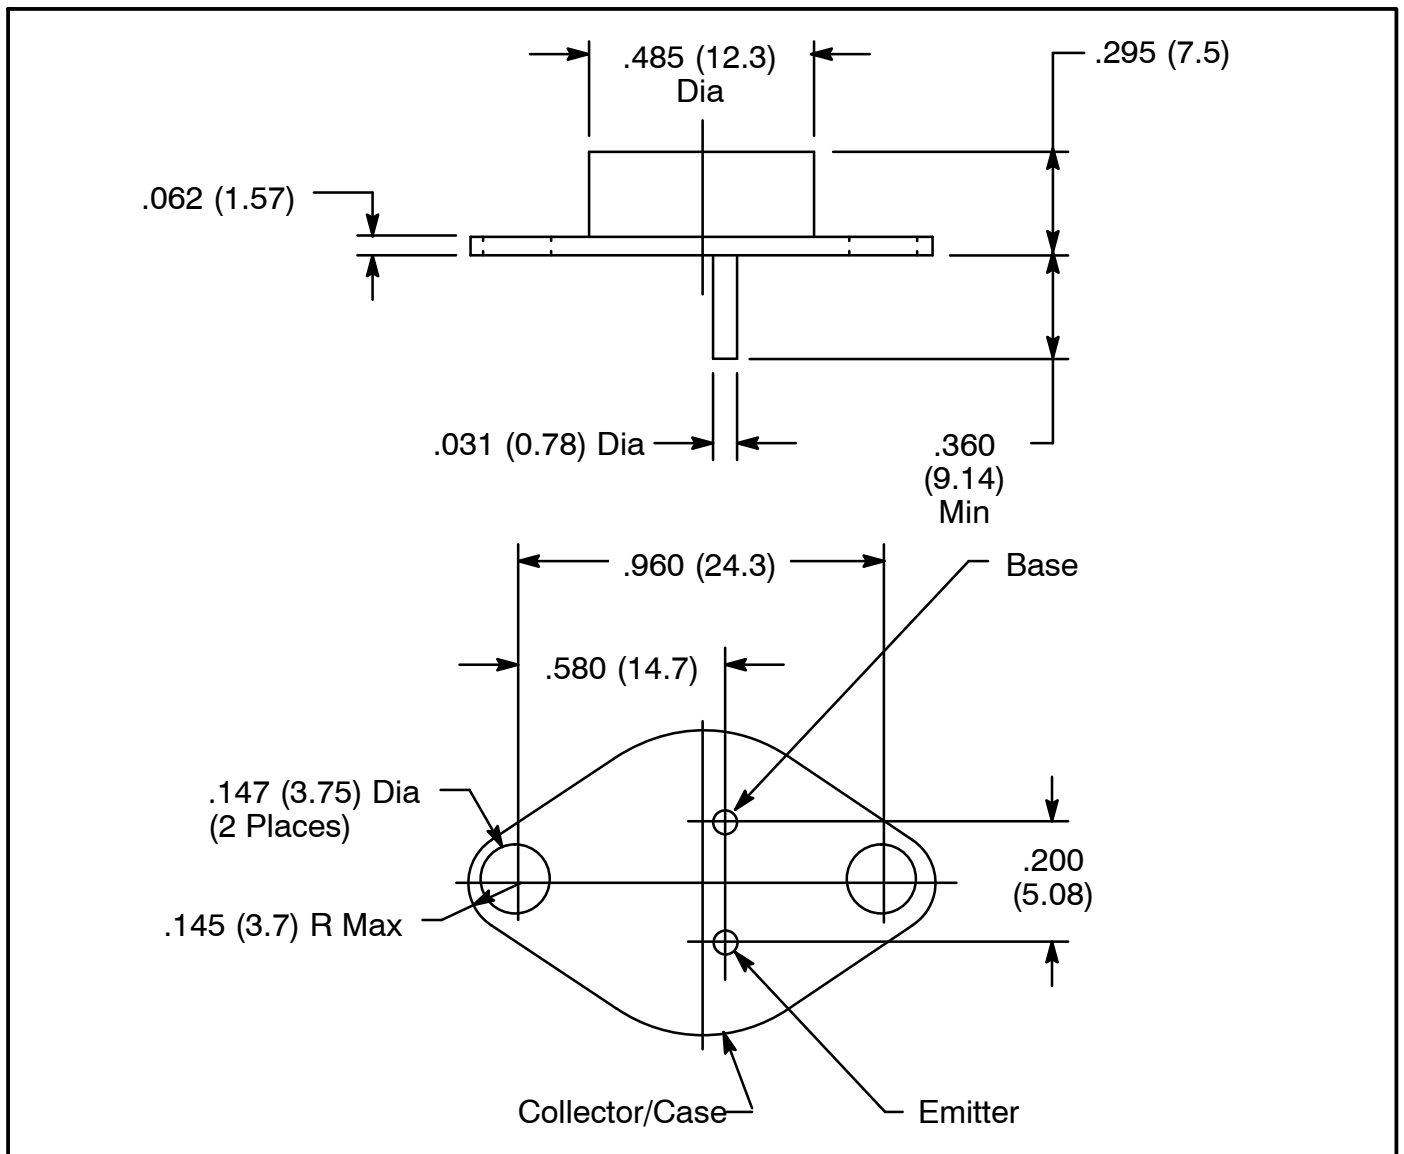

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)