

# polyurethane – metric

## close tolerance flexible polyurethane tubing




Technical characteristics of Legris polyurethane tubing also depend on the type of connection used.

The high flexibility of Legris flexible polyurethane tubing allows compact cabling where a small bend radius is required. Legris flexible polyurethane tubing has a shore hardness 52°D and conforms to NFE 49.101 standard.

O.D. of tube	tolerances on O.D.	Connected to Legris instant fittings, the calibration of Legris polyurethane tubing ensures <b>perfect sealing.</b>
3 to 8mm	+0.10 -0.10	
10 to 14mm	+0.15 -0.15	

## pressure and temperature resistance of Legris polyurethane tubing

In the graph below, each curve represents the acceptable maximum pressure at a given temperature, by diameter.  
example: polyurethane tube, Ø4 mm, at 20°C, working pressure = 10 bar

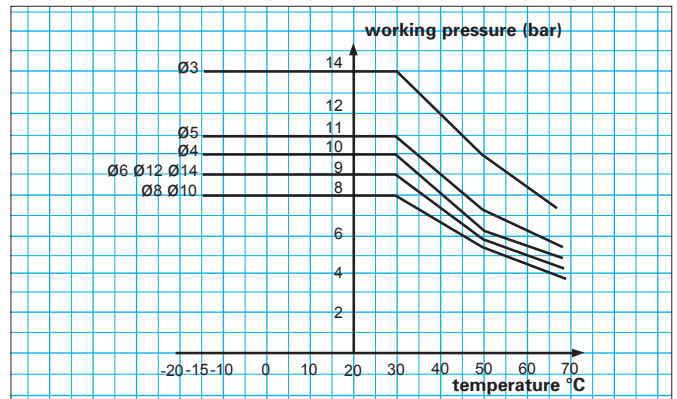

To calculate burst pressure, the values in the above graph should be multiplied x 3

In order to answer the different needs of the user, Legris provides additional ranges of polyurethane tubing:

- polyurethane twin tubing – below
- polyurethane recoil tubing – page M21

## close tolerance flexible polyurethane twin tubing



Technical characteristics of Legris flexible polyurethane twin tubing are the same as for Legris polyurethane tubing.

**Legris** flexible polyurethane twin tubing maintains the smooth surface of both tubes when separated and keeps the characteristics of their dimension.








Its use enables:

- swift and easy assembly
- compactness of circuitry
- differentiation of circuits, via two colors

O.D. of tube	tolerances on O.D.	Connected to Legris instant fittings, the calibration of Legris flexible polyurethane twin tubing ensures <b>optimum sealing.</b>
4 to 8mm	+0.10 -0.10	








# polyurethane – metric

## 1025U flexible polyurethane tubing

O.D. tube mm	I.D. tube mm	R minimum bend radius for tube at ambient temp. in mm	Flexible polyurethane tubing in 25m rolls – packaged in tubepack®							kg for 25m
			 clear	 black	 green	 red	 blue	 yellow	 gray	
3	1.8	8		1025U03 01 18						0.020
4	2.5	10	1025U04R08	1025U04 01	1025U04 02	1025U04 03	1025U04 04	1025U04 05	1025U04 06	0.310
5	3	13	1025U05R08	1025U05 01			1025U05 04			0.522
6	4	15	1025U06R08	1025U06 01	1025U06 02	1025U06 03	1025U06 04	1025U06 05	1025U06 06	0.591
8	5.5	20	1025U08R08	1025U08 01	1025U08 02	1025U08 03	1025U08 04	1025U08 05	1025U08 06	0.971
10	7	25	1025U10R08	1025U10 01	1025U10 02		1025U10 04	1025U10 05	1025U10 06	0.467
12	8	35	1025U12R08	1025U12 01	1025U12 02		1025U12 04	1025U12 05	1025U12 06	2.406
14	9.5	45		1025U14 01 95			1025U14 04 95			2.815

\* 'R' designates polyether tubing




## 1100U flexible polyurethane tubing

O.D. tube mm	I.D. tube mm	R minimum bend radius for tube at ambient temp. in mm	Flexible polyurethane tubing in 100m rolls – packaged in tubepack®							kg for 100m
			 clear	 black	 green	 red	 blue	 yellow	 gray	
4	2.5	10		1100U04 01	1100U04 02	1100U04 03	1100U04 04	1100U04 05	1100U04 06	1.092
5	3	13		1100U05 01			1100U05 04			1.605
6	4	15	1100U06R08	1100U06 01	1100U06 02	1100U06 03	1100U06 04	1100U06 05	1100U06 06	2.064
8	5.5	20	1100U08R08	1100U08 01	1100U08 02	1100U08 03	1100U08 04	1100U08 05	1100U08 06	3.610
10	7	25	1100U10R08	1100U10 01			1100U10 04			6.105
12	8	35	1100U12R08	1100U12 01			1100U12 04			8.610
14	9.5	45		1100U14 01 95			1100U14 04 95			11.215

\* 'R' designates polyether tubing

## flexible polyurethane twin tubing

### 1420U flexible polyurethane twin tubing, 25m roll

O.D. tube mm	I.D. tube mm	R minimum bend radius for tube at 20° C in mm	Part numbers for flexible polyurethane twin tubing in 25m rolls – packaged in tubepack®			kg for 25m
						
4	2.5	10	1420U04 11	1420U04 44	1420U04 41	0.620
6	4	15	1420U06 11	1420U06 44	1420U06 41	1.182
8	5.5	20	1420U08 11	1420U08 44	1420U08 41	1.942

Some technical tubing applications require a specific quality of polyurethane tubing (polyether or polyester). Legris offers both polyether PU and polyester PU. We recommend polyether PU tubing for water flow or liquids. For more information, please consult us.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [legris manufacturer](#):*

Other Similar products are found below :

[0670 00 21](#) [3199 06 21](#) [3166 04 08](#) [0931 08 13](#) [1025P06 02](#) [1025U06 03](#) [3199 06 10](#) [1025U06 01](#) [1025U08 01](#) [7910 10 00](#) [7770 04 00](#)  
[1025P08 05](#) [3166 04 10](#) [3104 04 00](#) [3102 10 00](#) [1025P06 05](#) [1025U04 04](#) [7770 06 00](#) [3106 04 00](#) [3101 08 17](#) [3166 06 08](#) [1005T06 00](#) [0915](#)  
[00 13](#) [1025U08 04](#) [3140 06 00](#) [9094U06 08](#) [0931 10 13](#) [0931 06 13](#) [3000 71 00](#) [0902 00 10](#) [1025U06 04](#) [7910 08 00](#) [3106 06 08](#) [0673 00 13](#)  
[3199 06 13](#) [3106 06 10](#) [0931 07 13](#) [3106 06 00](#) [7910 06 00](#) [3199 08 13](#) [3199 06 19](#) [3102 06 00](#) [3101 06 13](#) [0931 07 10](#) [3101 06 10](#) [3104 08](#)  
[00](#) [3101 04 19](#) [3104 06 00](#) [3126 08 00](#)