



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE2408 Silicon NPN Transistor General Purpose Amp, Surface Mount (Compl to NTE2409)

Description:

The NTE2408 is a silicon NPN general purpose transistor in a SOT-23 type surface mount package designed for use in driver stages of audio amplifiers in thick and thin-film hybrid circuits.

Absolute Maximum Ratings:

Collector-Base Voltage, V_{CBO}	80V
Collector-Emitter Voltage, V_{CES}	80V
Collector-Emitter Voltage, V_{CEO}	65V
Emitter-Base Voltage, V_{EBO}	6V
Collector Current, I_C	
Continuous	100mA
Peak	200mA
Peak Emitter Current, I_{EM}	200mA
Peak Base Current, I_{BM}	200mA
Total Power Dissipation ($T_A = +60^\circ\text{C}$, Note 1), P_{tot}	200mW
Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	-65 ° to +150°C
Thermal Resistance, Junction-to-Tab, R_{thJT}	60K/W
Thermal Resistance, Tab-to-Soldering Points, R_{thTS}	280K/W
Thermal Resistance, Soldering Points-to-Ambient (Note 1), R_{thSA}	90K/W

Note 1. Mounted on a ceramic substrate .314 (8mm) x .393 (10mm) x .027 (0.7mm).

Electrical Characteristics: ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 30\text{V}, I_E = 0$	-	-	15	nA
		$V_{CB} = 30\text{V}, I_E = 0, T_A = +150^\circ\text{C}$	-	-	5	μA
Base-Emitter Voltage	V_{BE}	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$, Note 2	580	660	700	mV
		$V_{CE} = 5\text{V}, I_C = 10\text{mA}$, Note 2	-	-	770	mV
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10\text{mA}, I_B = 0.5\text{mA}$, Note 3	-	90	250	mV
		$I_C = 100\text{mA}, I_B = 5\text{mA}$, Note 3	-	200	600	mV


Note 2. V_{BE} decreases by about 2mV/K with increasing temperature.

Note 3. $V_{BE(sat)}$ decreases by about 1.7mV with increasing temperature.

Electrical Characteristics (Cont'd): ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 10\text{mA}, I_B = 0.5\text{mA}, \text{Note 3}$	–	700	–	mV
		$I_C = 100\text{mA}, I_B = 5\text{mA}, \text{Note 3}$	–	900	–	mV
DC Current Gain	h_{FE}	$V_{CE} = 5\text{V}, I_C = 10\mu\text{A}$	–	150	200	
		$V_{CE} = 5\text{V}, I_C = 2\text{mA}$	–	290	450	
Transition Frequency	f_T	$V_{CE} = 5\text{V}, I_C = 10\text{mA}, f = 35\text{MHz}$	–	300	–	MHz
Collector Capacitance	C_c	$V_{CB} = 10\text{V}, I_E = I_e = 0, f = 1\text{MHz}$	–	2.5	–	pF
Small-Signal Current Gain	h_{fe}	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$	125	–	500	
Noise Figure	NF	$V_{CE} = 5\text{V}, I_C = 200\mu\text{A}, f = 1\text{kHz}, B = 200\text{Hz}$	–	2	10	dB

Note 3. $V_{BE(sat)}$ decreases by about 1.7mV with increasing temperature.

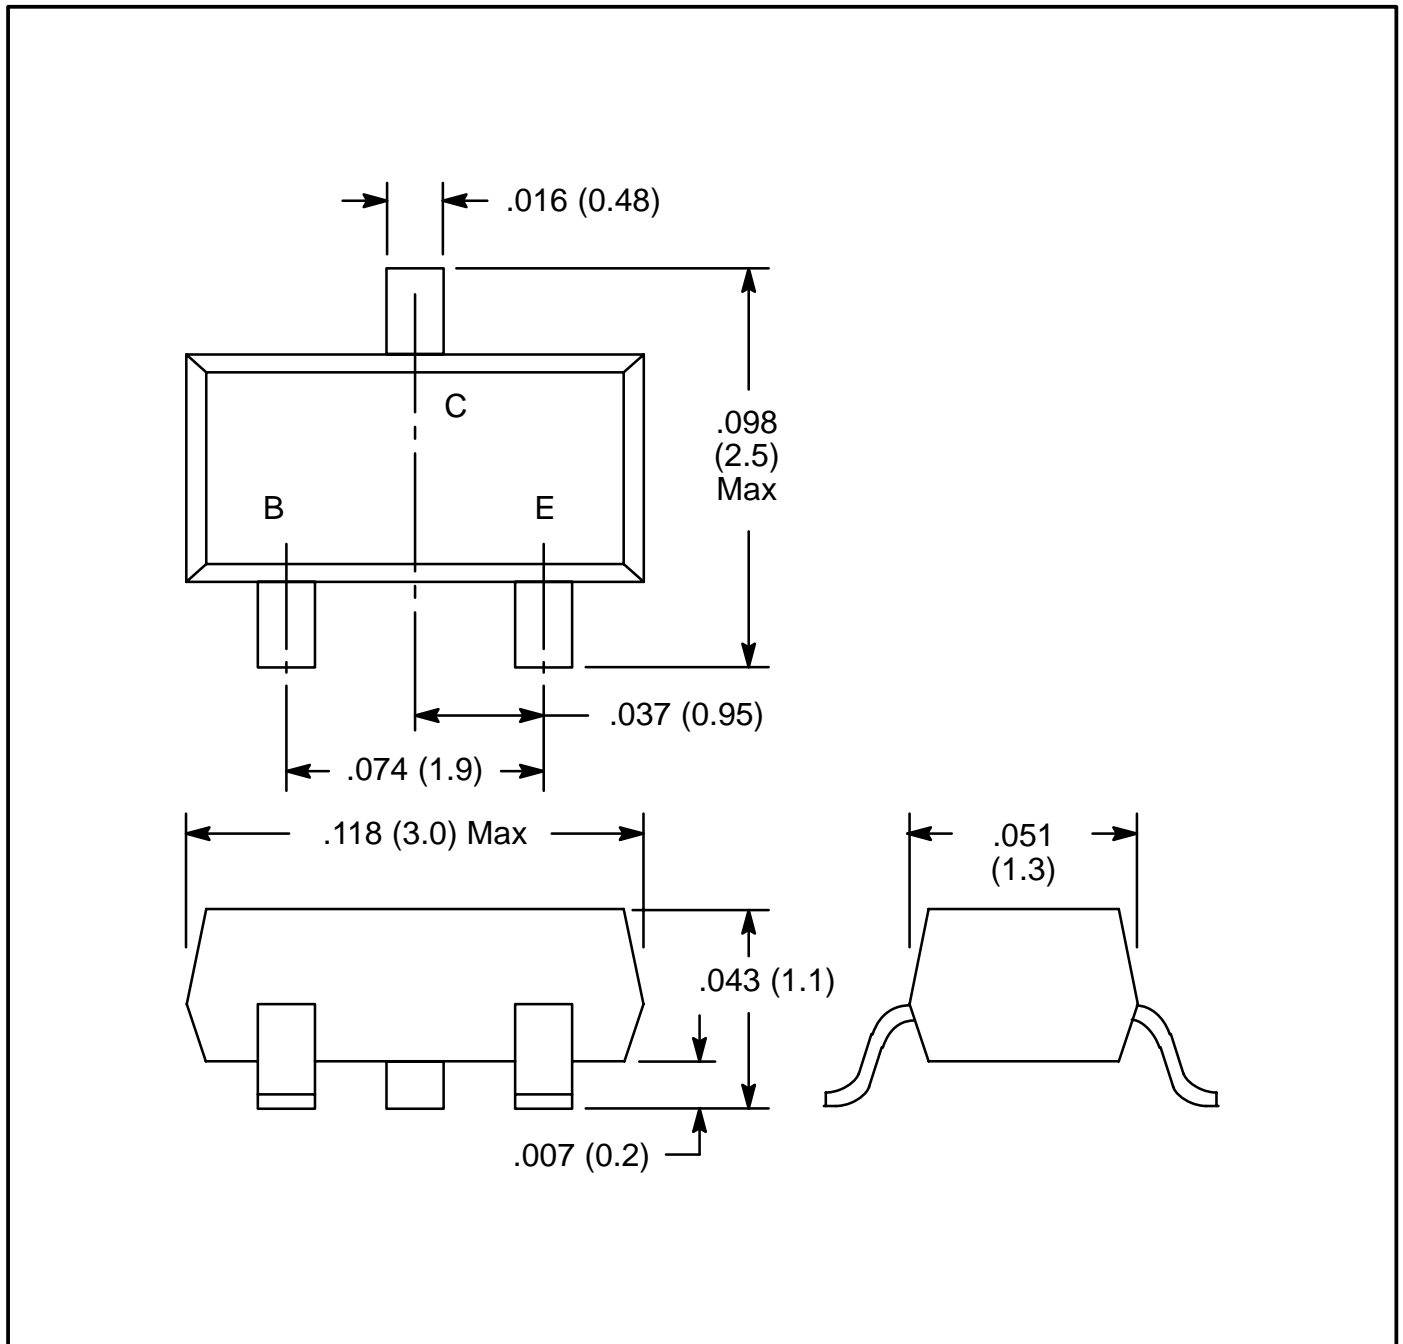

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)