

## NTE2513 (NPN) & NTE2514 (PNP) Silicon Complementary Transistors High Current Switch

**Features:**

- Low Collector Emitter Saturation Voltage
- High Gain–Bandwidth Product
- Excellent Linearity of  $h_{FE}$
- Fast Switching Time

**Applications:**

- Display Drivers
- High Speed Inverters
- Converters

**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Collector Base Voltage, $V_{CBO}$ .....	60V
Collector Emitter Voltage, $V_{CEO}$ .....	50V
Emitter Base Voltage, $V_{EBO}$ .....	6V
Collector Current, $I_C$	
Continuous .....	8A
Peak .....	12A
Collector Power Dissipation, $P_C$	
$T_A = +25^\circ\text{C}$ .....	1.2W
$T_C = +25^\circ\text{C}$ .....	20W
Operating Junction Temperature, $T_J$ .....	+150°C
Storage Temperature Range, $T_{stg}$ .....	–55° to +150°C


**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB} = 40V, I_E = 0$	–	–	1.0	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 4V, I_C = 0$	–	–	1.0	$\mu\text{A}$
DC Current Gain	$h_{FE}$	$V_{CE} = 2V, I_C = 500\text{mA}$	140	–	240	
		$V_{CE} = 2V, I_C = 6A$	35	–	–	
Gain–Bandwidth Product	$f_T$	$V_{CE} = 5V, I_C = 1A$	–	180	–	MHz
			–	130	–	MHz
NTE2513						
NTE2514						

**Electrical Characteristics (Cont'd):** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Capacitance NTE2513	$C_{ob}$	$V_{CB} = 10\text{V}, f = 1\text{MHz}$	-	65	-	pF
NTE2514			-	95	-	pF
Collector Emitter Saturation Voltage NTE2513	$V_{CE(sat)}$	$I_C = 4\text{A}, I_B = 200\text{mA}$	-	200	400	mV
NTE2514			-	250	500	mV
Base Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 4\text{A}, I_B = 200\text{mA}$	-	0.95	1.3	V
Collector Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	60	-	-	V
Collector Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}, R_{BE} = \infty$	50	-	-	V
Emitter Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	6	-	-	V
Turn-On Time	$t_{on}$	$V_{CC} = 25\text{V}, V_{BE} = -5\text{V},$ $10I_{B1} = -10I_{B2} = I_C = 4\text{A},$ Pulse Width = $20\mu\text{s},$ Duty Cycle $\leq 1\%$ , Note 1	-	50	-	ns
Storage Time NTE2513	$t_{stg}$		-	500	-	ns
NTE2514			-	450	-	ns
Fall Time	$t_f$		-	20	-	ns

Note 1. For NTE2514, the polarity is reversed.

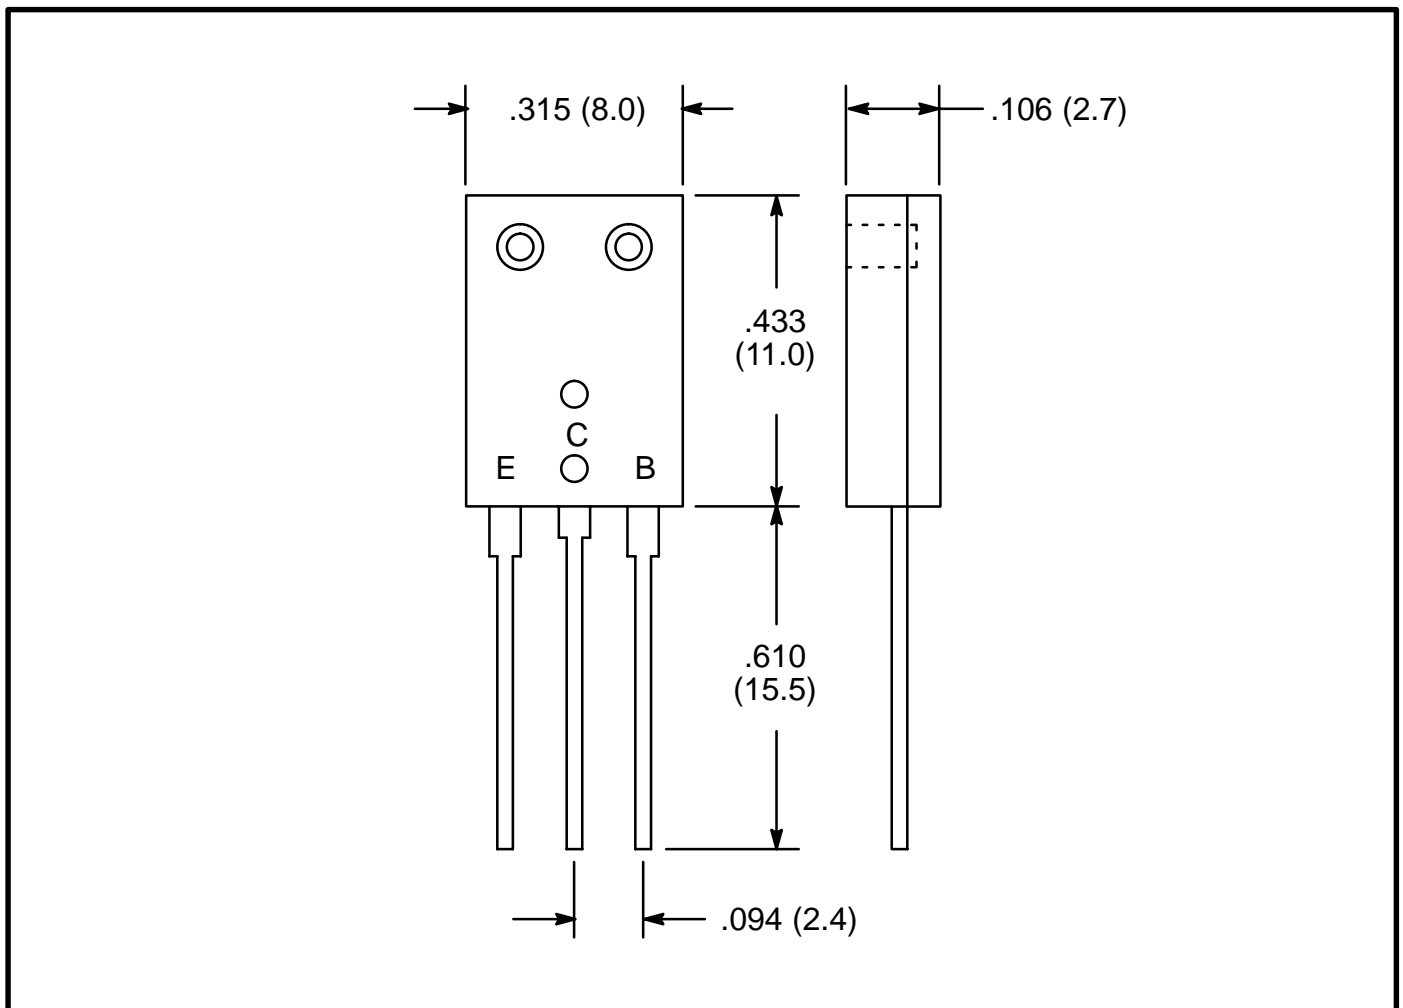

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)