



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE2698 Silicon NPN Transistor General Purpose TO3PN Type Package

Features:

- Low Collector Saturation Voltage: $V_{CE(sat)} = 0.5V$ Max @ $I_C = 3A$
- Collector–Emitter Breakdown Voltage: $V_{(BR)CEO} = 120V$ Min
- Good Linearity of h_{FE}

Applications:

- Humidifier
- DC/DC Converter
- General Purpose Power Amplifiers



Absolute Maximum Ratings: ($T_A = +25^\circ C$ unless otherwise specified)

Collector–Base Voltage, V_{CBO}	200V
Collector–Emitter Voltage, V_{CEO}	120V
Emitter–Base Voltage, V_{EBO}	8V
Collector Current, I_C	
Continuous	7A
Pulse	14A
Continuous Base Current, I_B	3A
Collector Power Dissipation ($T_C = +25^\circ C$), P_C	70W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	–55° to +150°C

Electrical Characteristics: ($T_C = +25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector–Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 50mA, I_B = 0$	120	–	–	V
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 3A, I_B = 300mA$	–	–	0.5	V
Base–Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 3A, I_B = 300mA$	–	–	1.2	V
Collector Cut–Off Current	I_{CBO}	$V_{CB} = 200V, I_E = 0$	–	–	100	μA
Emitter Cut–Off Current	I_{EBO}	$V_{EB} = 8V, I_C = 0$	–	–	100	μA
DC Current Gain	h_{FE}	$I_C = 3A, V_{CE} = 4V$	100	–	200	



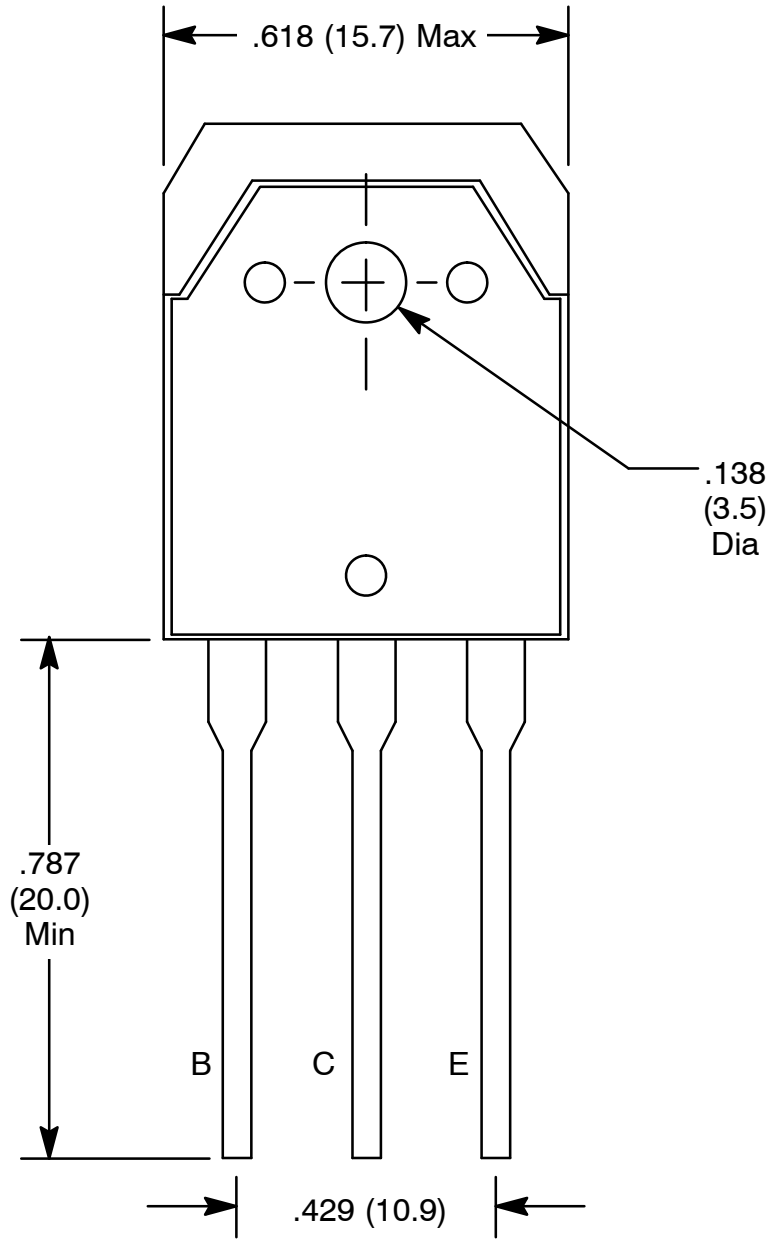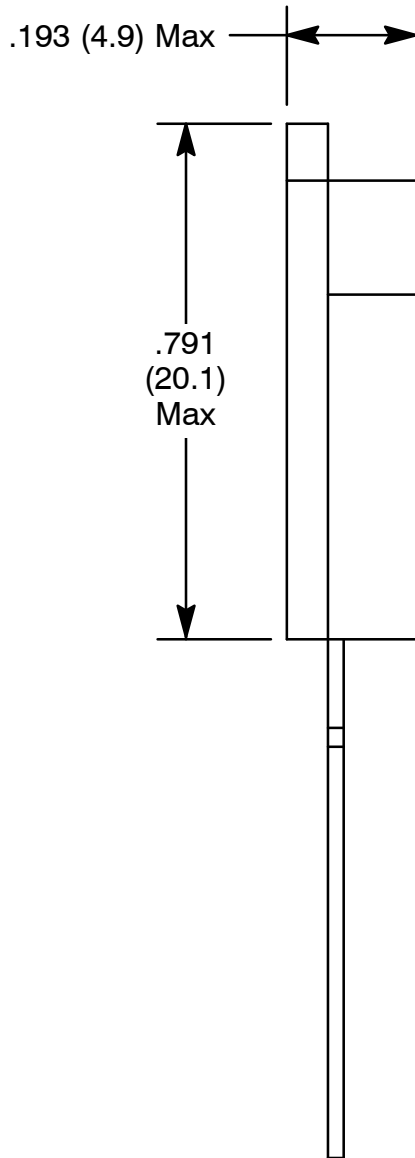

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [2N2369ADCSM](#)
[2N5769](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[US6T6TR](#) [NJL0281DG](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [TTA1452B,S4X\(S](#) [2N3583](#) [NTE103](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE101](#) [NTE13](#) [NTE15](#) [NTE16001](#) [NTE16006](#)
[NTE26](#)