



44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinco.com>


NTE300 (NPN) & NTE307 (PNP) Silicon Complementary Transistors Audio Power Amplifier

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector-Base Voltage, V_{CBO}	50V
Collector-Emitter Voltage, V_{CEO}	40V
Emitter-Base Voltage, V_{EBO}	5V
Collector Current, I_C	1.5A
Collector Power Dissipation ($T_C = +25^\circ\text{C}$), P_C	7W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	-55° to +150°C

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 1\text{mA}$, $I_E = 0$	50	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)EBO}$	$I_C = 10\text{mA}$, $R_{BE} = \infty$	40	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 1\text{mA}$, $I_C = 0$	5	-	-	V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 25\text{V}$, $I_E = 0$	-	-	1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 5\text{V}$, $I_C = 0$	-	-	1	μA
DC Current Gain	h_{FE}	$V_{CE} = 4\text{V}$, $I_C = 500\text{mA}$	55	-	300	
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 1\text{A}$, $I_B = 50\text{mA}$	-	-	1	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = 4\text{V}$, $I_C = 50\text{mA}$	-	0.7	-	V

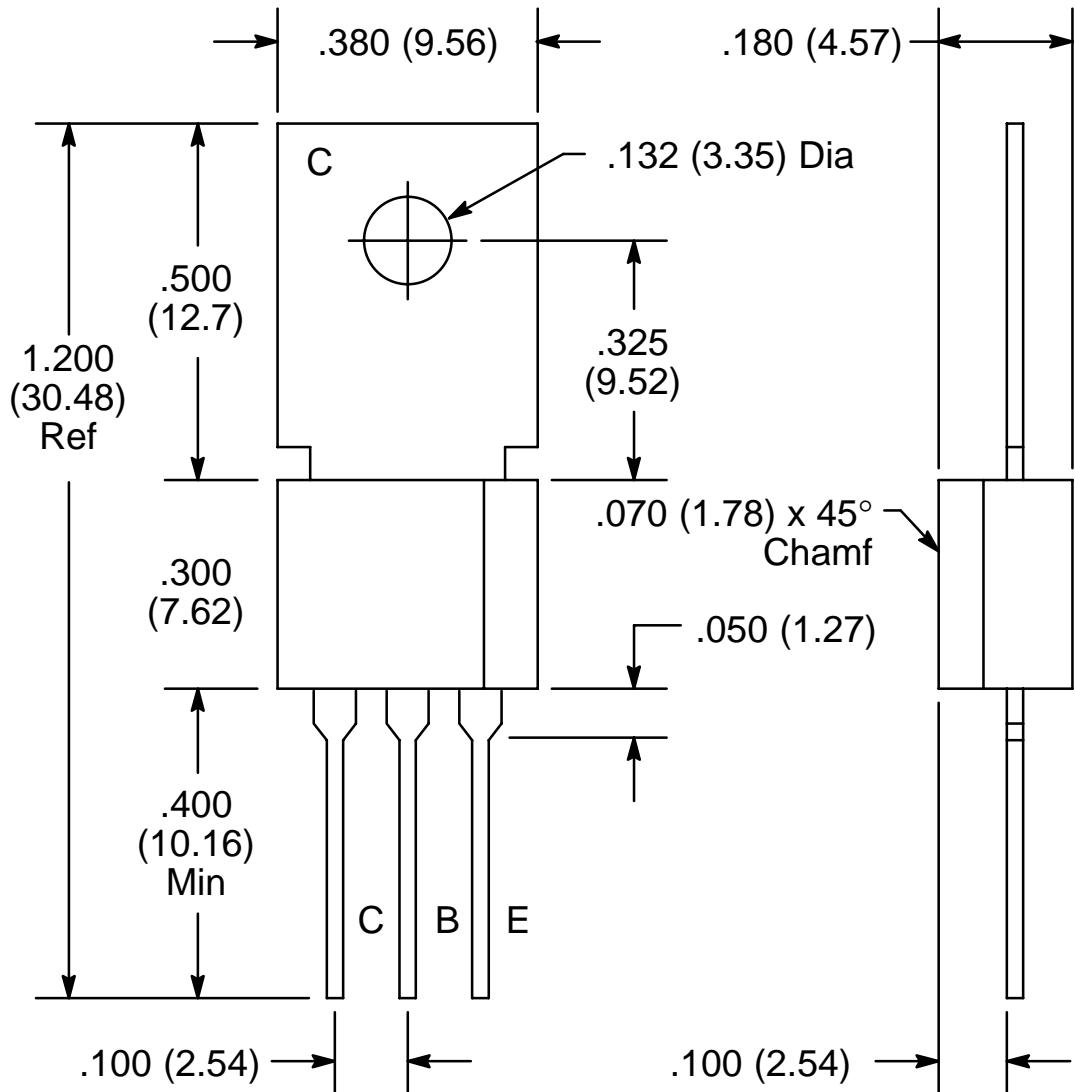

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by NTE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [2N2369ADCSM](#)
[2N5769](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[US6T6TR](#) [NJL0281DG](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [TTA1452B,S4X\(S](#) [2N3583](#) [NTE103](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE101](#) [NTE13](#) [NTE15](#) [NTE16001](#) [NTE16006](#)
[NTE26](#)