



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>



## NTE30127 Super Bright LED Indicator Turquoise, 5mm

**Features:**

- Low Power Consumption
- Excellent Product Quality and Reliability
- Versatile Mounting on P.C. Board or Panel

**Applications:**

- Electronic Signs and Signals
- Bright Ambient Lighting Conditions
- Backlights
- General Purpose Indicators



**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Power Dissipation, $P_D$ .....	70mW
Peak Forward Current (Pulse Width $\leq 0.1\text{ms}$ , Duty Cycle $\leq 1/10$ ), $I_{FM}$ .....	100mA
Continuous Forward Current, $I_F$ .....	20mA
Reverse Voltage, $V_R$ .....	5V
Operating Temperature Range, $T_{opr}$ .....	$-40^\circ$ to $+85^\circ\text{C}$
Storage Temperature Range, $T_{stg}$ .....	$-40^\circ$ to $+85^\circ\text{C}$
Lead Temperature (During Soldering, 1.6mm from Body, 4sec Max), $T_L$ .....	$+260^\circ\text{C}$

**Electrical Optical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	$V_F$	$I_F = 20\text{mA}$	-	3.2	-	V
Reverse Current	$I_R$	$V_R = 5\text{V}$	-	-	10	$\mu\text{A}$
Dominant Emission Wavelength X Y	$\lambda_d$	$I_F = 20\text{mA}$	-	0.24	-	nm
			-	0.40	-	nm
Luminous Intensity	$I_V$	$I_F = 20\text{mA}$		10000	-	mcd
View Angle of Half Power	$2 \theta_{1/2}$	$I_F = 20\text{mA}$	-	15	-	deg

Note 1.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

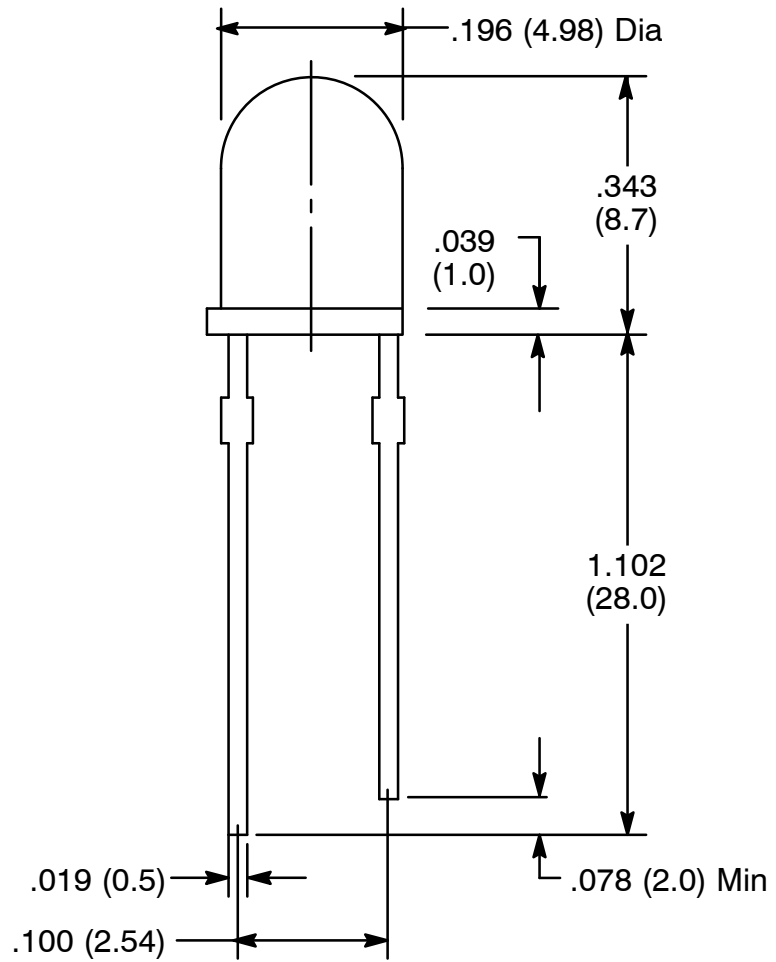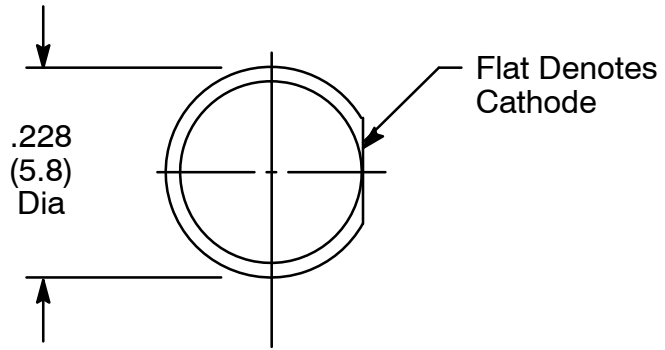

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - Through Hole category](#):*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[LTL-10234W](#) [LTL-10254W](#) [LTL-1214A](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-433P](#) [LTL-5234](#) [LTL87HTBK](#) [LTW-87HD4B](#)  
[HLMP-3507-D00B1](#) [HLMP-EL30-PS0DD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [NTE30036](#) [NTE30044](#) [NTE30059](#) [NTE3020](#) [LD CQDP-](#)  
[1U3U-W5-1-K](#) [LO566UHR3-70G-A3](#) [LP379PPG1C0G0300001](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [1.90690.3330000](#) [SSS-](#)  
[LX4673ID-410B](#) [1L0532Y24I0TD001](#) [264-7SYGD/S530-E2](#) [HLMP1385](#) [LTL-10224W](#) [LTL-1224A](#) [LTL-1234A](#) [LTL-1BEHJ-012](#) [LTL-](#)  
[2251AT](#) [LTL-307YE-012](#) [LTL-403HR](#) [LTL-4222](#) [LU7-E-B](#) [4380H1](#) [TLHY44K1L2](#) [HLMP-3962-F0002](#) [HLMP-GG15-R0000](#) [323-](#)  
[2SURD/S530-A3](#) [L53SRC/E-Z](#) [L-7679C1ZGC](#) [4302T1-5V](#) [4306D23](#) [4363D1/5](#) [WP1503SRC/J4](#) [WP153GDT](#)