



NTE29 (NPN) & NTE30 (PNP) **Silicon Complementary Transistors** **High Power, High Current Switch**

Description:

The NTE29 (NPN) and NTE30 (PNP) are complementary power transistors in a TO3 type case designed for use in high power amplifier and switching circuit applications.

Features:

- High Current Capability: $I_C = 50A$ (Continuous)
- DC Current Gain: $h_{FE} = 15$ to 60 @ $I_C = 25A$
- Low Collector-Emitter Saturation Voltage: $V_{CE(sat)} = 1V$ Max @ $I_C = 25A$

Absolute Maximum Ratings:

Collector-Emitter Voltage, V_{CEO}	80V
Collector-Base Voltage, V_{CB}	80V
Emitter-Base Voltage, V_{EB}	5V
Continuous Collector Current, I_C	50A
Base Current, I_B	15A
Total Device Dissipation ($T_C = +25^\circ C$), P_D	300W
Derate Above $25^\circ C$	1.715W/ $^\circ C$
Operating Junction Temperature Range, T_J	-65° to +200° C
Storage Temperature Range, T_{stg}	-65° to +200° C
Thermal Resistance, Junction-to-Case, R_{thJC}	0.584° C/W


Electrical Characteristics: ($T_C = +25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 0.2A$, $I_B = 0$, Note 1	80	-	-	V
Collector Cutoff Current	I_{CEO}	$V_{CE} = 40V$, $I_B = 0$	-	-	1	mA
	I_{CEX}	$V_{CE} = 80V$, $V_{EB(off)} = 1.5V$	-	-	2	mA
		$V_{CE} = 80V$, $V_{EB(off)} = 1.5V$, $T_C = +150^\circ C$	-	-	10	mA
	I_{CBO}	$V_{CB} = 80V$, $I_E = 0$	-	-	2	mA
Emitter Cutoff Current	I_{EBO}	$V_{BE} = 5V$, $I_C = 0$	-	-	5	mA

Electrical Characteristics (Cont'd): ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
ON Characteristics (Note 1)						
DC Current Gain	h_{FE}	$I_C = 25\text{A}, V_{CE} = 2\text{V}$	15	-	60	
		$I_C = 50\text{A}, V_{CE} = 5\text{V}$	5	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 25\text{A}, I_B = 2.5\text{A}$	-	-	1	V
		$I_C = 50\text{A}, I_B = 10\text{A}$	-	-	5	V
Base-Emitter Saturation Voltage	$V_{BE(\text{sat})}$	$I_C = 25\text{A}, I_B = 2.5\text{A}$	-	-	2	V
Base-Emitter ON Voltage	$V_{BE(\text{on})}$	$I_C = 25\text{A}, V_{CE} = 2\text{V}$	-	-	2	V
Dynamic Characteristics						
Current Gain-Bandwidth Product	f_T	$I_C = 5\text{A}, V_{CE} = 10\text{V}, f = 1\text{MHz}$	2	-	-	MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, I_E = 0, f = 0.1\text{MHz}$	-	-	1200	pF
Small-Signal Current Gain	h_{fe}	$I_C = 10\text{A}, V_{CE} = 5\text{V}, f = 1\text{kHz}$	15	-	-	

Note 1. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

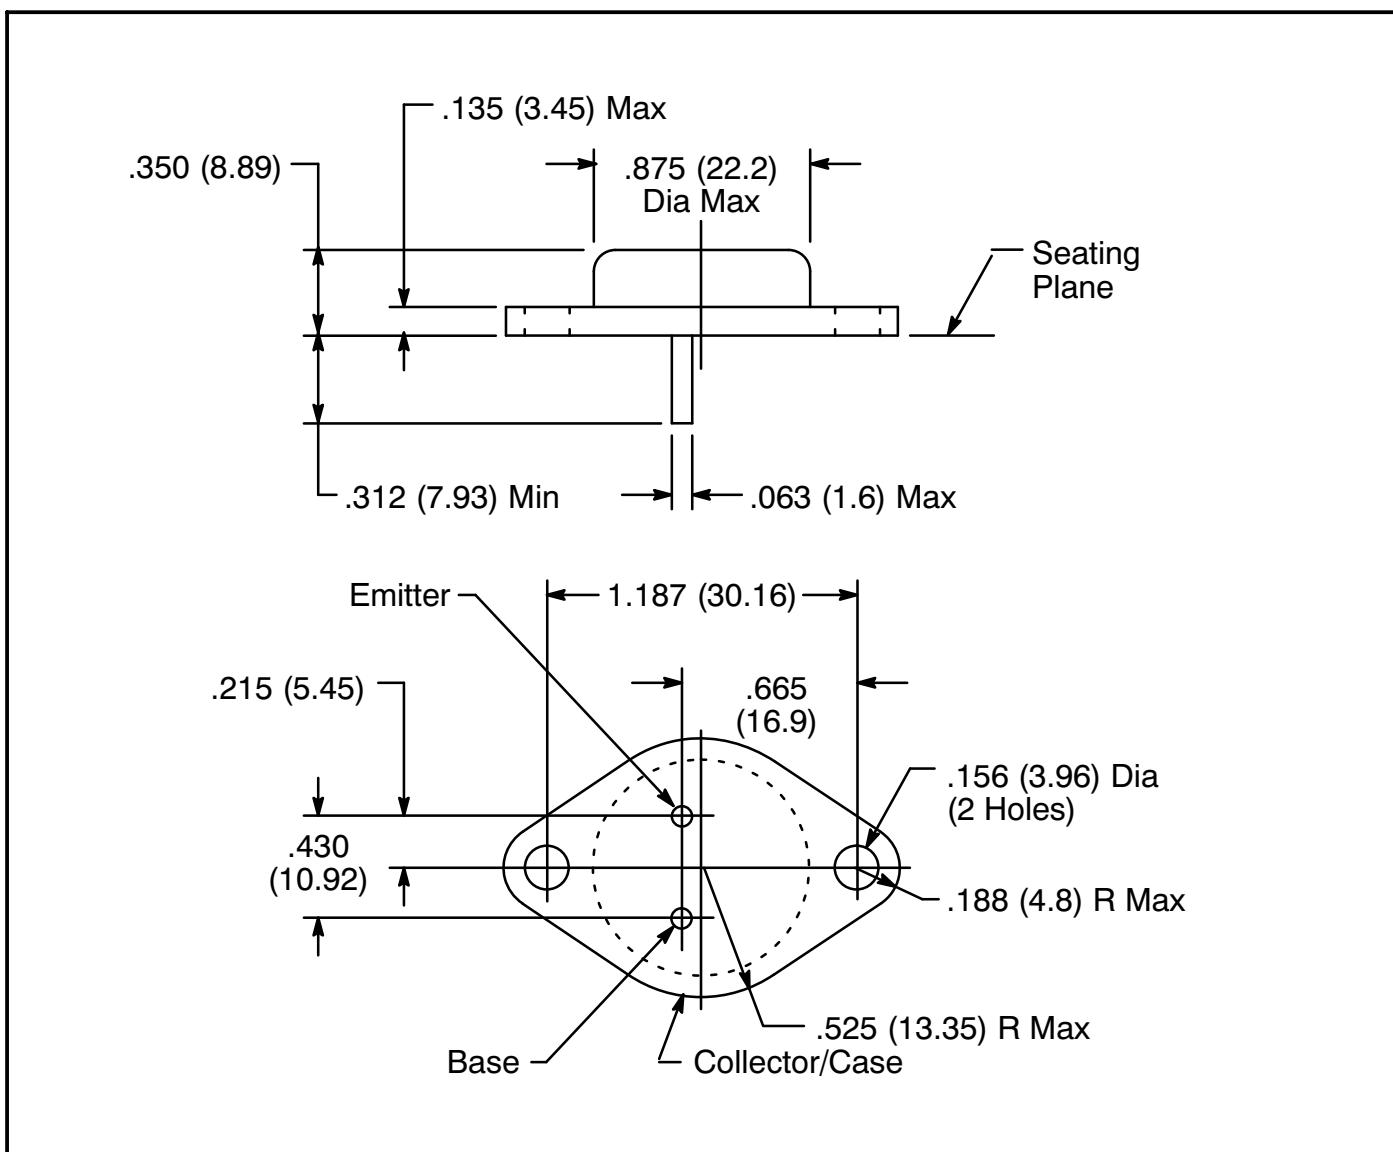

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by NTE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)