

NTE316 Silicon NPN Transistor High Gain, Low Noise Amp

Features:



- High Current Gain–Bandwidth Product
- Low Noise Figure
- High Power Gain

Absolute Maximum Ratings:

Collector–Emitter Voltage, V_{CEO}	15V
Collector–Base Voltage, V_{CBO}	30V
Emitter–Base Voltage, V_{EBO}	3V
Continuous Collector Current, I_C	50mA
Total Continuous Device Dissipation ($T_A = +25^\circ\text{C}$), P_D	200mW
Derate Above 25°C	1.14mW/ $^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65° to $+200^\circ\text{C}$

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector–Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 5\text{mA}, I_B = 0$	15	–	–	V
Collector–Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 0.1\text{mA}, I_E = 0$	30	–	–	V
Emitter–Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 0.1\text{mA}, I_C = 0$	3.5	–	–	V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 5\text{V}, I_E = 0$	–	–	10	nA
ON Characteristics						
DC Current Gain	h_{FE}	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$	25	–	250	
Dynamic Characteristics						
Current Gain–Bandwidth Product	f_T	$V_{CE} = 5\text{V}, I_C = 10\text{mA}, f = 100\text{MHz}$	1400	–	–	MHz
Collector–Base Capacitance	C_{cb}	$V_{CB} = 10\text{V}, I_E = 0, f = 1\text{kHz}$	–	0.8	1.0	pF
Small–Signal Current Gain	h_{fe}	$V_{CE} = 5\text{V}, I_C = 2\text{mA}, f = 1\text{kHz}$	25	–	250	
Collector–Base Time Constant	$r_b \cdot C_c$	$V_{CE} = 5\text{V}, I_E = 2\text{mA}, f = 31.8\text{MHz}$	2	–	12	ps
Noise Figure	NF	$V_{CE} = 5\text{V}, I_C = 2\text{mA}, R_S = 50\Omega, f = 450\text{MHz}$	–	–	4.5	dB
Functional Test						
Common–Emitter Amplifier Power Gain	G_{pe}	$V_{CE} = 5\text{V}, I_C = 2\text{mA}, f = 450\text{MHz}$	15	–	–	dB

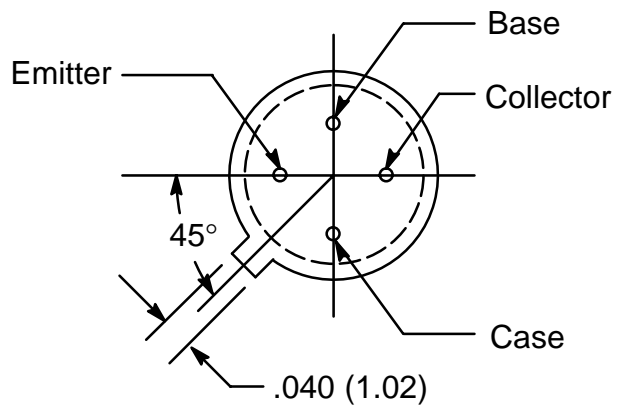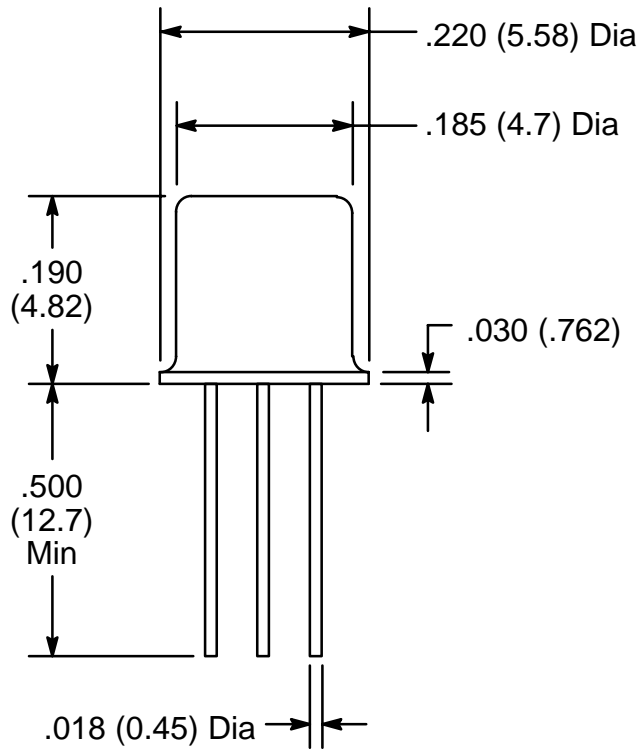

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)