



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## NTE392 (NPN) & NTE393 (PNP) Silicon Complementary Transistors General Purpose TO-3PN Type Package

**Description:**

The NTE392 (NPN) and NTE393 (PNP) are silicon complementary transistors in a TO-3PN type package designed for general purpose power amplifier and switching applications.

**Features:**

- 25A Collector Current
- Low Leakage Current:  $I_{CEO} = 1\text{mA} @ V_{CE} = 60\text{V}$
- Excellent DC Gain:  $h_{FE} = 40 \text{ Typ} @ 15\text{A}$
- High Current Gain Bandwidth Product:  $h_{fe} = 3 \text{ Min} @ I_C = 1\text{A}, f = 1\text{MHz}$

**Absolute Maximum Ratings:**

Collector-Emitter Voltage, $V_{CEO}$ .....	100V
Collector-Base Voltage, $V_{CB}$ .....	100V
Emitter-Base Voltage, $V_{EB}$ .....	5V
Collector Current, $I_C$	
Continuous .....	25A
Peak (Note 1) .....	40A
Continuous Base Current, $I_B$ .....	5A
Total Power Dissipation ( $T_C = +25^\circ\text{C}$ ), $P_D$ .....	125W
Derate Above $25^\circ\text{C}$ .....	1W/ $^\circ\text{C}$
Operating Junction Temperature Range, $T_J$ .....	$-65^\circ$ to $+150^\circ\text{C}$
Storage Temperature Range, $T_{stg}$ .....	$-65^\circ$ to $+150^\circ\text{C}$
Unclamped Inductive Load, $E_{SB}$ .....	90mJ
Thermal Resistance, Junction-to-Case, $R_{thJC}$ .....	1.0 $^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient, $R_{thJA}$ .....	35.7 $^\circ\text{C/W}$


Note 1. Pulse Test: Pulse Width = 10ms, Duty Cycle  $\leq$  10%.

**Electrical Characteristics:** ( $T_C = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>OFF Characteristics</b>						
Collector–Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 30\text{mA}, I_B = 0, \text{Note 2}$	100	–	–	V
Collector–Emitter Cutoff Current	$I_{CEO}$	$V_{CE} = 60\text{V}, I_B = 0$	–	–	1	mA
	$I_{CES}$	$V_{CE} = 100\text{V}, V_{EB} = 0$	–	–	0.7	mA
Emitter–Base Cutoff Current	$I_{EBO}$	$V_{EB} = 5\text{V}, I_C = 0$	–	–	1	mA
<b>ON Characteristics (Note 2)</b>						
DC Current Gain	$h_{FE}$	$I_C = 1.5\text{A}, V_{CE} = 4\text{V}$	25	–	–	
		$I_C = 15\text{A}, V_{CE} = 4\text{V}$	15	–	75	
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 15\text{A}, I_B = 1.5\text{A}$	–	–	1.8	V
		$I_C = 25\text{A}, I_B = 5\text{A}$	–	–	4	V
Base–Emitter ON Voltage	$V_{BE(on)}$	$I_C = 15\text{A}, V_{CE} = 4\text{V}$	–	–	2.0	V
		$I_C = 25\text{A}, V_{CE} = 4\text{V}$	–	–	4.0	V
<b>Dynamic Characteristics</b>						
Small–Signal Current Gain	$h_{fe}$	$I_C = 1\text{A}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	25	–	–	
Current–Gain Bandwidth Product	$f_T$	$I_C = 1\text{A}, V_{CE} = 10\text{V}, f = 1\text{MHz}, \text{Note 3}$	3	–	–	MHz

Note 2. Pulse Test: Pulse Width =  $300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .

Note 3.  $f_T = |h_{fe}| \cdot f_{test}$

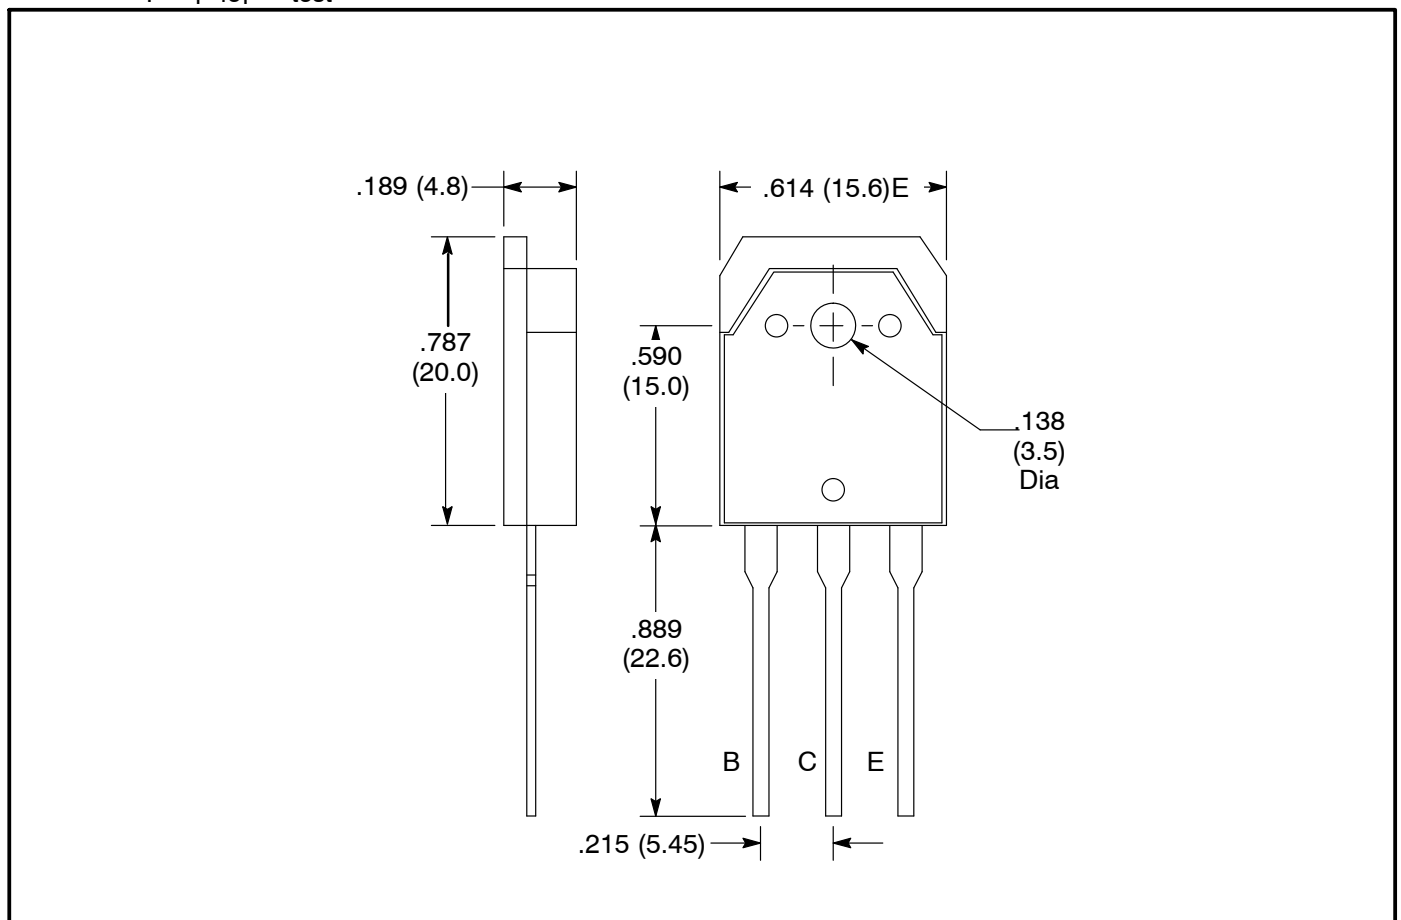

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)