



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE587 Silicon Diode Ultra Fast Switch

Features:

- Super Fast Switching Speed
- High Current Capability
- High Surge Current Capability
- Low Forward Voltage Drop
- High Reliability
- DO41 Type Package


Maximum Ratings and Electrical Characteristics:

($T_A = +25^\circ\text{C}$ unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%)

Maximum Recurrent Peak Reverse Voltage	200V
Maximum RMS Voltage	140V
Maximum Average Forward Rectified Current ($T_A = +55^\circ\text{C}$)	1.0A
Peak Forward Surge Current (8.3ms single half wave superimposed on rated load)	30A
Maximum Forward Voltage Drop ($I_O = 1\text{A}$)	0.95V
Maximum DC Reverse Current ($V_{DC} = 200\text{V}$)	5 μA
Maximum DC Reverse Current ($V_{DC} = 200\text{V}$, $T_A = +150^\circ\text{C}$)	50 μA
Maximum Reverse Recovery Time (Note 1)	35ns
Typical Junction Capacitance (Note 2)	53pF
Operating Temperature Range, T_{opr}	-65° to $+150^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65° to $+150^\circ\text{C}$

Note 1. Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$.

Note 2. Measured at 1MHz and applied reverse voltage of 4V.

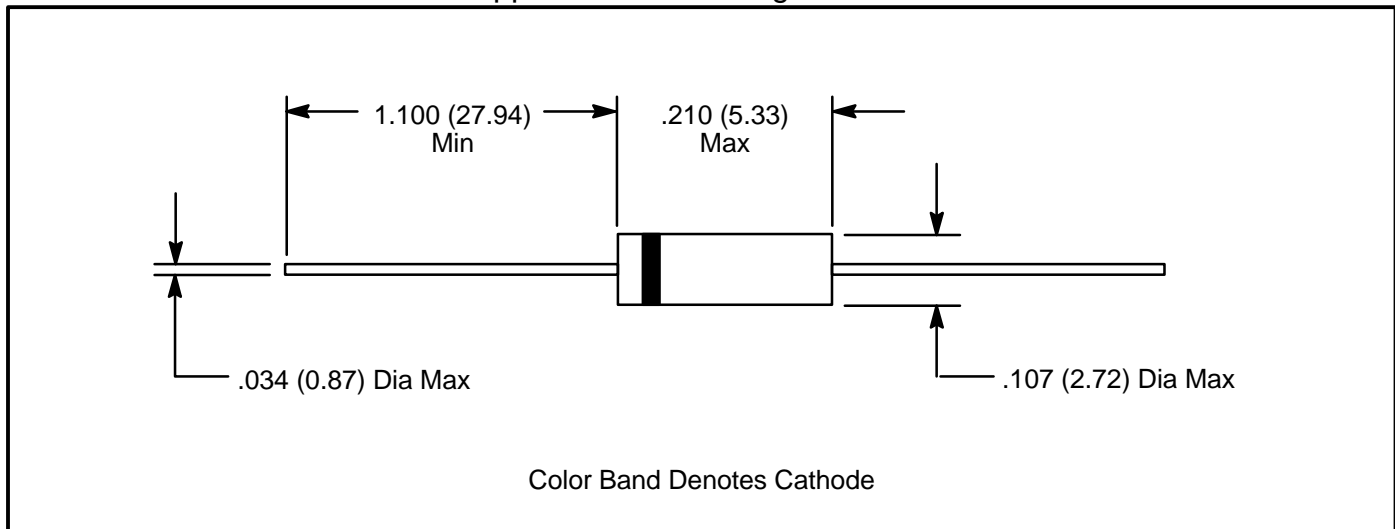

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)
[5615](#) [591](#) [7056](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [NTE528](#) [NTE542](#) [NTE74154](#)
[04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-](#)
[SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-](#)
[SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#) [04-ESNF-500L](#) [04-SL.625-R-5](#) [04-SCW5C-WH](#)
[04-ESNF-1000L](#)