


SILICON CARBIDE (SiC) SCHOTTKY DIODE

SML10SiC06SMD5C

- Hermetic Ceramic Surface Mount Package.
- Semelab's Silicon Carbide (SiC) Schottky diodes exhibit low forward voltage and superb high temperature performance.
- Suitable for high-frequency hard switching applications, where system efficiency and reliability are paramount.
- No reverse recovery time due to absence of minority carrier injection.
- Screening Options Available.

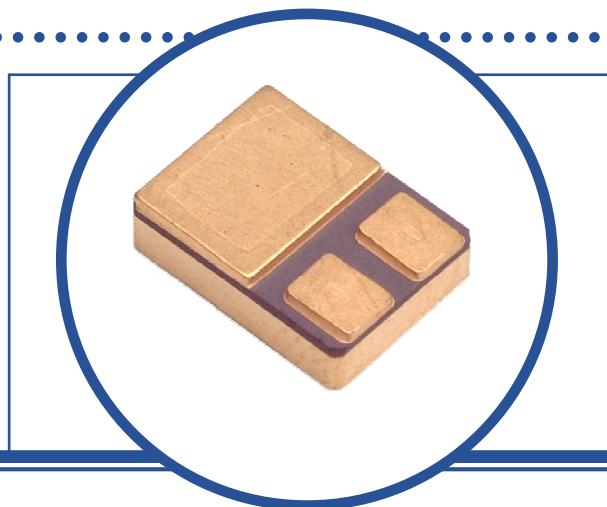

ABSOLUTE MAXIMUM RATINGS (Per Diode, $T_C = 25^\circ\text{C}$ unless otherwise stated)

V_R	DC Reverse Voltage	600V
V_{RRM}	Repetitive Peak Reverse Voltage	600V
I_F	DC Forward Current ($T_J = 175^\circ\text{C}$)	10A
I_{FRM}	Repetitive Peak Forward Current ⁽¹⁾	67A
I_{FSM}	Surge Peak Forward Current ⁽²⁾	250A
P_D	Total Power Dissipation at Derate Above 25°C	100W 0.5W/ $^\circ\text{C}$
T_J	Junction Temperature Range	-55 to $+225^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55 to $+225^\circ\text{C}$

THERMAL PROPERTIES

Symbols	Parameters	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction To Case	2.0	$^\circ\text{C}/\text{W}$

Notes

(1) $T_c = 25^\circ\text{C}$, $T_p = 10\text{ms}$, Half Sine Wave, $D = 0.3$

(2) $T_c = 25^\circ\text{C}$, $T_p = 10\mu\text{s}$

SILICON CARBIDE (SiC) SCHOTTKY DIODE SML10SIC06SMD5C

ELECTRICAL CHARACTERISTICS (Per Diode, $T_C = 25^\circ\text{C}$ unless otherwise stated)

Static Characteristics


Symbols	Parameters	Test Conditions	Min.	Typ.	Max.	Units
V_F	Forward Voltage	$I_F = 10\text{A}$		1.5	1.8	V
		$T_J = 175^\circ\text{C}$		2.0	2.4	
I_R	Reverse Current	$V_R = 600\text{V}$		10	50	μA
		$T_J = 175^\circ\text{C}$		20	200	

Dynamic Characteristics

Q_C	Total Capacitive Charge	$V_R = 600\text{V}$, $I_F = 10\text{A}$ $\delta i/\delta t = 500\text{A}/\mu\text{s}$		25		nC
C	Total Capacitance	$V_R = 1.0\text{V}$, $f = 1.0\text{MHz}$		480		μF
		$V_R = 200\text{V}$, $f = 1.0\text{MHz}$		50		
		$V_R = 400\text{V}$, $f = 1.0\text{MHz}$		42		

MECHANICAL DATA


Dimensions in mm (inches)

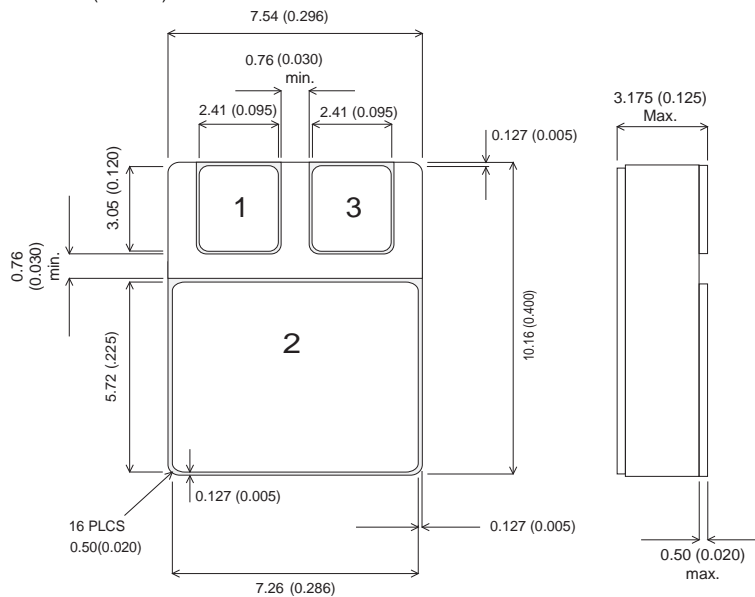

SMD05 (TO-276AA)

Underside View

Pad 1 – Anode 1 Pad 2 – Common Cathode Pad 3 – Anode 2

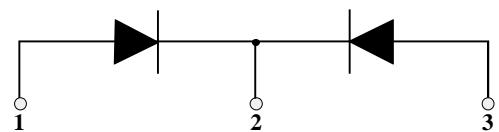

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tt electronics](#) manufacturer:

Other Similar products are found below :

[L083S392LF](#) [L061S391LF](#) [L091S224LF](#) [L061S220LF](#) [BCN164A562J7](#) [62PR25KLF](#) [CHP1501R00FLF](#) [BCN164AB470J7](#) [898-3-R150K](#)
[66XR10](#) [66XR200K](#) [66XR2K](#) [66XR50](#) [67WR1MEG](#) [67WR200KLFTB](#) [67ZR200](#) [68WR5K](#) [68XR2MEG](#) [72PXR10K](#) [72XR2.5K](#) [8109](#)
[82PR25K](#) [84WR10KTR](#) [PWC2512-330RJI](#) [OPB660N](#) [OPB748WZ](#) [OPB842W51Z](#) [OPB870T55](#) [OPF430](#) [P110KV1-0Y20BR50K](#) [P170SP1-](#)
[FC15AR10K](#) [89XHR10K](#) [L083C101](#) [91XR5K](#) [SML100M12MSF](#) [PFC-W0805LF-03-2870-B](#) [2627](#) [CR200L.5](#) [RC07GF220J](#) [RC55LF-D-](#)
[196R-B-B](#) [3371R5KL.5](#) [HM00-01800](#) [HM71-10220LFTR](#) [3371R5KL.25](#) [L083C122](#) [WH25-47RJI](#) [WH5-100RJI](#) [040585XM](#) [6679-420-0](#)
[CHP1-100-1R00-F](#)