



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>



NTE6090 Silicon Dual Power Rectifier 45V, 30 Amp TO-3P Type Package

Features:



- Schottky Barrier Chip
- Guard Ring for Transient Protection
- Low Forward Voltage Drop
- Low Power Loss, High Efficiency
- High Surge Current Capability

Maximum Ratings and Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified. Single Phase, half-wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%)

Peak Repetitive Reverse Voltage, V_{RRM}	45V
Working Peak Reverse Voltage, V_{RWM}	45V
DC Blocking Voltage, V_R	45V
RMS Reverse Voltage, $V_{R(RMS)}$	32V
Average Rectified Output Current ($T_C = +100^\circ\text{C}$), I_O	
Per Device	30A
Per Diode	15A
Non-Repetitive Peak Forward Surge Current, I_{FSM} (8.3ms Single Half Sine-Wave Surge Superimposed on Rated Load)	250A
Forward Voltage Drop (Per Diode, $I_F = 15\text{A}$), V_{FM}	
$T_J = +25^\circ\text{C}$	0.55V
$T_J = +125^\circ\text{C}$	0.50V
Peak Reverse Current ($V_R = 45\text{V}$), I_{RM}	
$T_J = +25^\circ\text{C}$	1.0mA
$T_J = +100^\circ\text{C}$	20mA
Typical Junction Capacitance (Note 1), C_J	750pF
Operating Junction Temperature Range, T_J	-55° to $+150^\circ\text{C}$
Storage Temperature Range, T_{stg}	-55° to $+150^\circ\text{C}$
Peak Surge Junction Temperature (Forward Current Applied), $T_{J(pk)}$	$+175^\circ\text{C}$
Thermal Resistance, Junction-to-Case (Per Diode), R_{thJC}	1.4°C/W
Thermal Resistance, Junction-to-Ambient (Per Diode), R_{thJA}	40°C/W

Note 1. Measured at 1MHz and applied reverse voltage of 4.0V DC.

TO3P Type Package

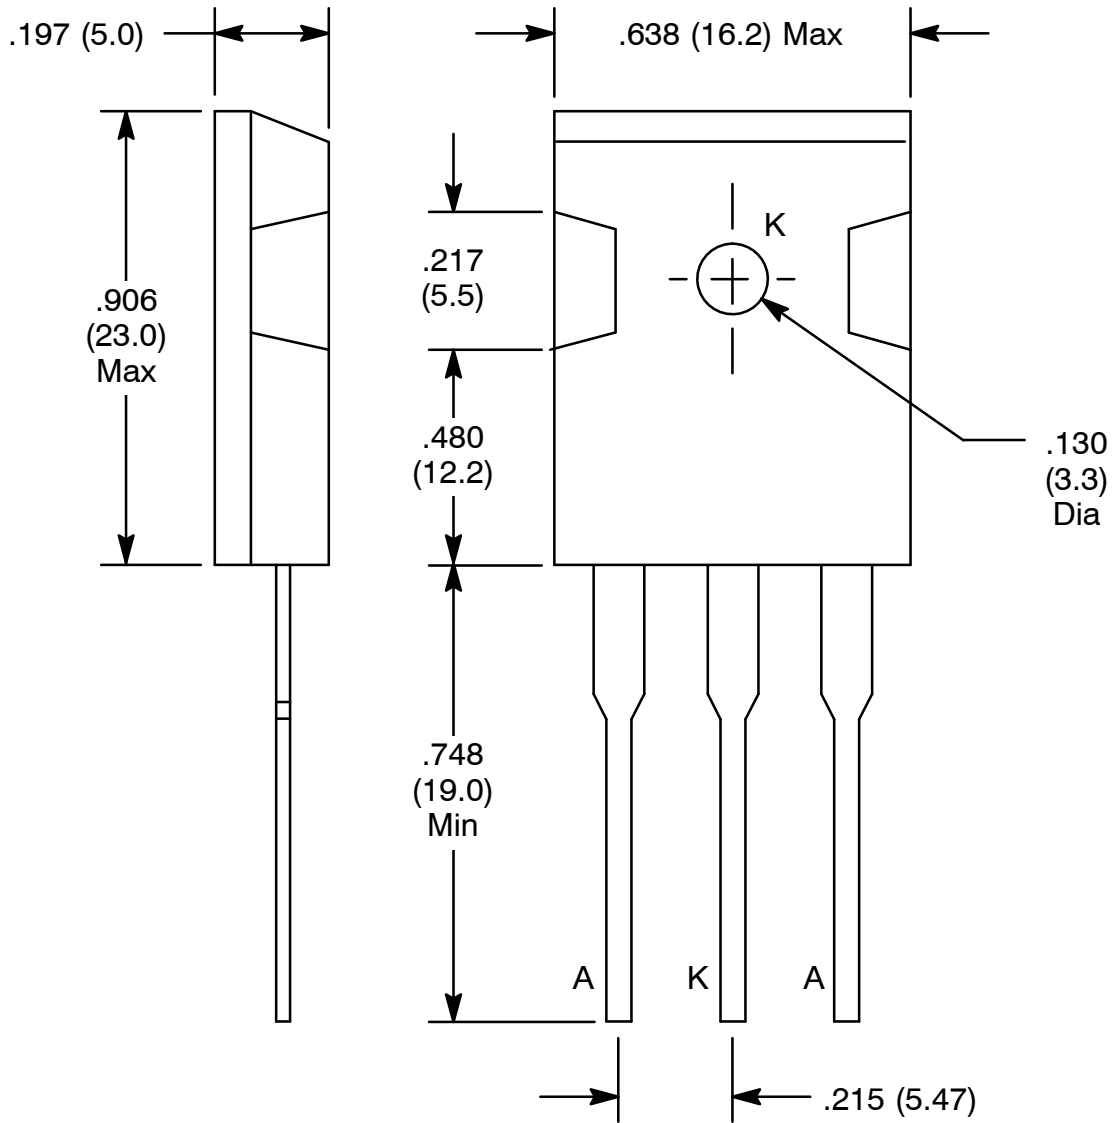

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#) [BAS16E6433HTMA1](#) [BAS3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SK310-T](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [SB007-03C-TB-E](#) [SK154-TP](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-6CWQ10FNHM3](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [BAT6202VH6327XTSA1](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#) [NRVBM120ET1G](#)