



44 FARRAND STREET  
BLOOMFIELD, NJ 07003  
(973) 748-5089

## NTE6240 & NTE6244 Silicon Rectifier Super Fast, Dual, Center Tap

### **Features:**

- Dual Rectifier Construction:
  - NTE6240— Positive Center-Tap
  - NTE6244— Negative Center-Tap
- Superfast Recovery Times, High Voltage
- Low Power Loss, High Efficiency
- Low Forward Voltage, High Current Capability
- High Temperature Soldering Guaranteed: +250°C @ .250" (6.35mm) from Case for 10sec

### **Applications:**

- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications


**Maximum Ratings and Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$ , resistive or inductive load, for capacitive load, derate current by 20%, unless otherwise specified)

Maximum Recurrent Peak Reverse Voltage, $V_{RRM}$ .....	200V
Maximum RMS Voltage, $V_{RMS}$ .....	140V
Maximum DC Blocking Voltage, $V_{DC}$ .....	200V
Maximum Average Forward Rectified Current (.375 (9.5) Lead Lengths at $+100^\circ\text{C}$ ), $I_{(AV)}$ .....	16A
Peak Forward Surge Current, $I_{FSM}$ 8.3ms single half sine-wave superimposed on rated load .....	100A
Maximum Instantaneous Forward Voltage (Per Diode, $I_O = 8\text{A}$ ), $V_F$ .....	975mV
Maximum DC Reverse Current ( $V_{DC} = 200\text{V}$ ), $I_R$ $T_A = +25^\circ\text{C}$ .....	5μA
$T_A = +100^\circ\text{C}$ .....	50μA
Maximum Reverse Recovery Time ( $T_J = +25^\circ\text{C}$ , Note 1), $t_{rr}$ .....	35ns
Typical Thermal Resistance, Junction-to-Case, $R_{thJC}$ .....	5.5°C/W
Operating Junction Temperature Range, $T_J$ .....	-65° to +150°C
Storage Temperature Range, $T_{stg}$ .....	-65° to +150°C



Note 1. Reverse Recovery Test Conditions:  $I_F = 5\text{A}$ ,  $I_R = 1\text{A}$ ,  $I_{RR} = 25\text{A}$

Note 2. Measured at 1MHz and applied reverse voltage of 4V.

NTE6240

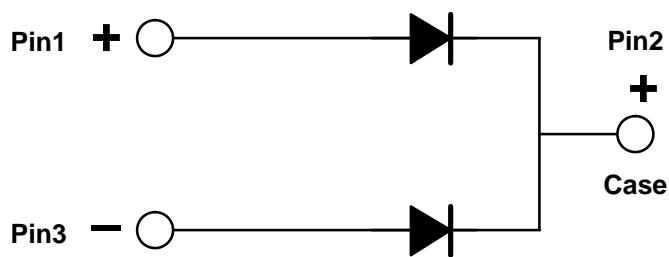

NTE6244

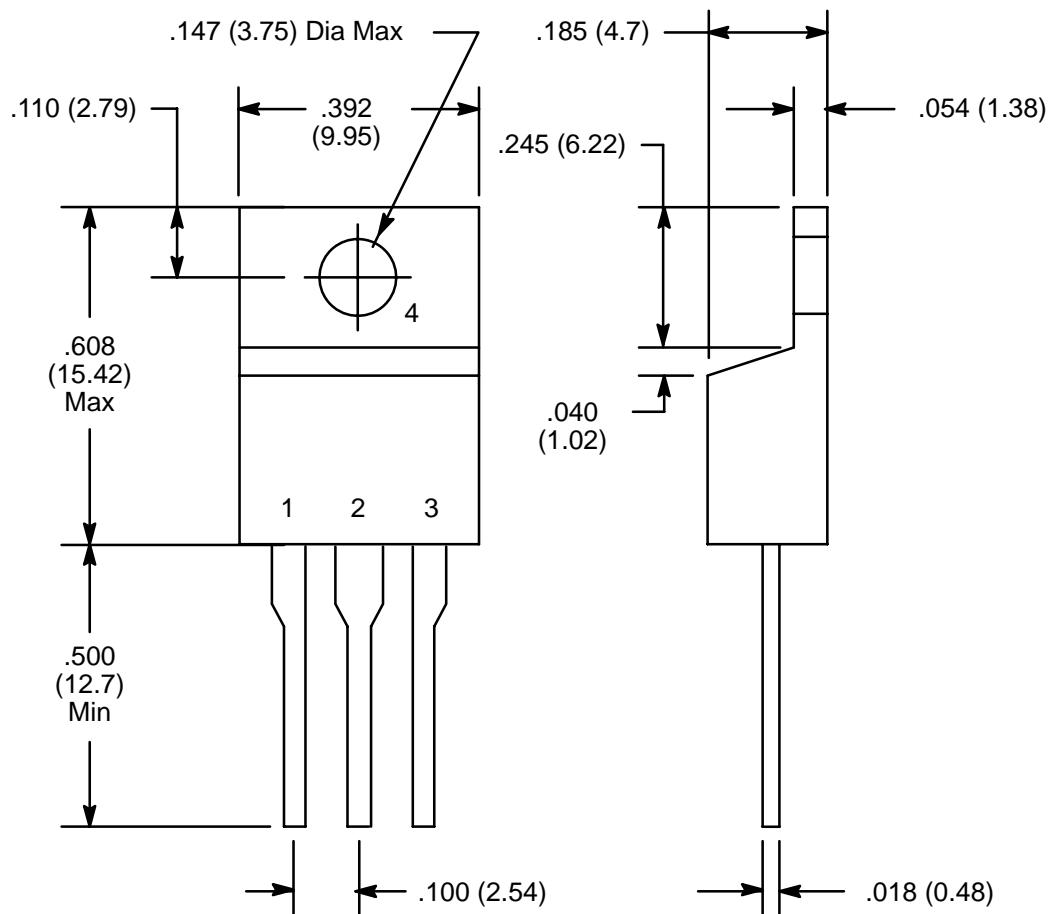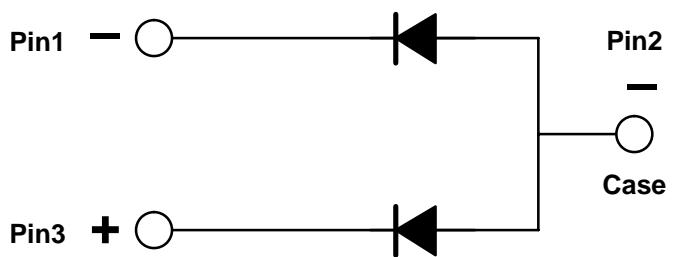

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [nte](#) manufacturer:***

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)  
[5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#)  
[NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#)