



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE631 Silicon Rectifier Diode High-Speed Switch SOD110 Surface Mount Package

Description:

The NTE631 is a high-speed switching diode fabricated in planar technology and encapsulated in a very small rectangular ceramic SOD110 SMD package.

Features:

- Small Ceramic SOD110 SMD Package
- High Switching Speed

Applications:

- High-Speed Switching in Surface Mounted Circuits

Absolute Maximum Ratings:

Repetitive Peak Reverse Voltage, V_{RRM}	85V
Continuous Reverse Voltage, V_R	75V
Continuous Forward Current (Note 1), I_F	250mA
Repetitive Peak Forward Current, I_{FRM}	5020mA
Non-Repetitive Peak Forward Current (Square Wave, $T_J = +25^\circ\text{C}$ Prior to Surge), I_{FSM}	
$t = 1\mu\text{s}$	4A
$t = 1\text{ms}$	1A
$t = 1\text{sec}$	0.5A
Total Power Dissipation ($T_A = +25^\circ\text{C}$, Note 1), P_{tot}	400mW
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	-65° to +150°C
Thermal Resistance, Junction-to-Ambient (Note 1), R_{thJA}	315K/W
Thermal Resistance, Junction-to-Case, R_{thJC}	200K/W


Note 1. Device mounted on an FR4 printed-circuit board.

Electrical Characteristics: ($T_J = +25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F = 1\text{mA}$	-	-	715	mV
		$I_F = 10\text{mA}$	-	-	855	mV
		$I_F = 50\text{mA}$	-	-	1.0	V
		$I_F = 150\text{mA}$	-	-	1.25	V

Electrical Characteristics (Cont'd): ($T_J = +25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Current	I_R	$V_R = 25\text{V}$	-	-	30	nA
			$T_J = +150^\circ\text{C}$	-	-	30
		$V_R = 75\text{V}$	-	-	1	μA
			$T_J = +150^\circ\text{C}$	-	-	50
Diode Capacitance	C_d	$f = 1\text{MHz}, V_R = 0$	-	-	1.5	pF
Reverse Recovery Time	t_{rr}	When switched from $I_F = 10\text{mA}$ to $I_R = 10\text{mA}$, $R_L = 100\Omega$, measured at $I_R = 1\text{mA}$	-	-	4	ns
Forward Recovery Voltage	V_{fr}	When switched from $I_F = 10\text{mA}$, $t_r = 20\text{ns}$	-	-	1.75	V

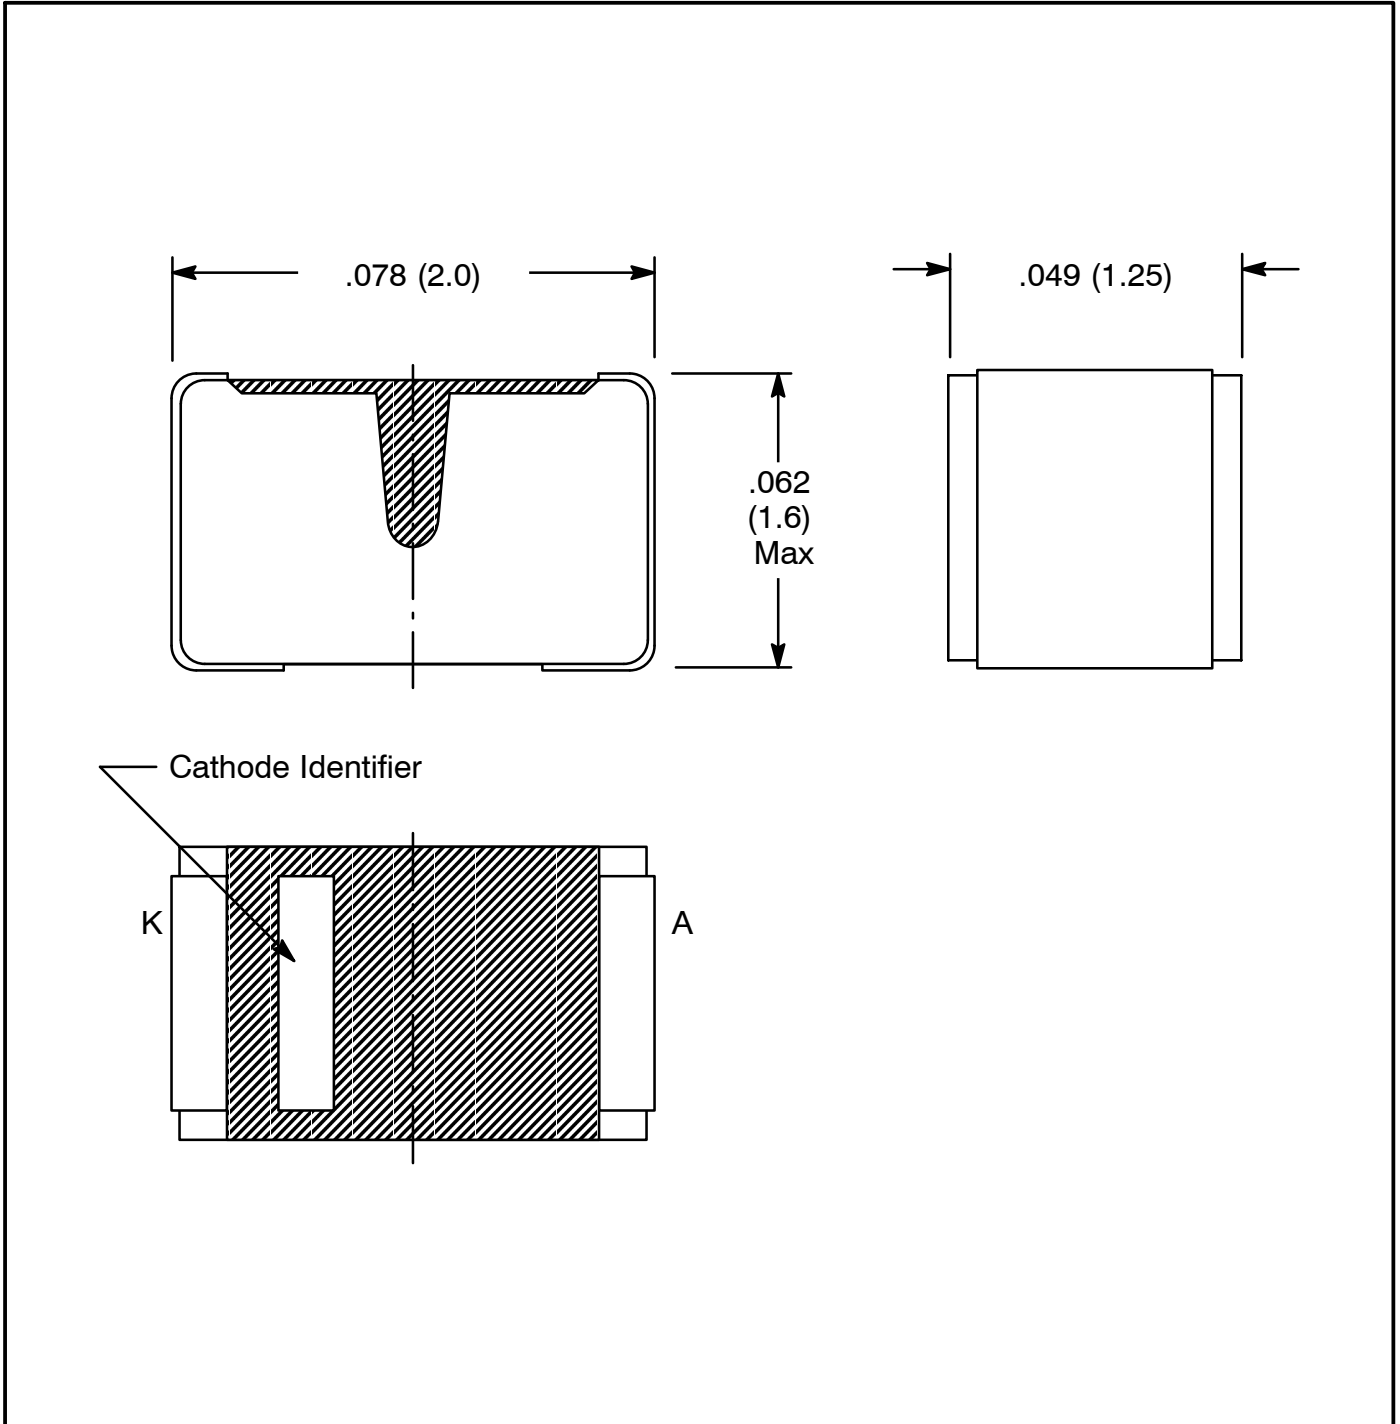

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [47-20848-R](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#) [5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#) [NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#)