



ELECTRONICS, INC.  
44 FARRAND STREET  
BLOOMFIELD, NJ 07003  
(973) 748-5089  
<http://www.nteinc.com>

## NTE6368 & NTE6369 Silicon Power Rectifier Stud Mount, Fast Recovery, 250 Amp

### Features:

- Fast Recovery Times
- Soft Recovery Characteristics
- Standard (NTE6368) and Reverse (NTE6369) Polarities
- High Surge Current Ratings
- High Rated Blocking Voltages

### Applications:


- Inverters
- Choppers
- Transmitters
- Free Wheeling Diode

### Absolute Maximum Ratings:

RMS Forward Current, $I_{F(RMS)}$ .....	400A
Average Forward Current, $I_{F(AV)}$ .....	250A
One-Half Cycle Surge Current, $I_{FSM}$ .....	4500A
$I^2t$ for Fusing (Times $\geq 8.3\text{ms}$ ), $I^2t$ .....	85000A <sup>2</sup> sec
Operating Junction Temperature Range, $T_J$ .....	-40° to +190°C
Storage Temperature Range, $T_{stg}$ .....	-40° to +150°C
Thermal Resistance, Junction-to-Case, $R_{thJC}$ .....	0.17°C/W
Thermal Resistance, Case-to-Sink (Lubricated), $R_{thCS}$ .....	0.10°C/W
Mounting Torque (Lubricated) .....	360 (40.06) in•lb (m•N)

### Electrical Characteristics:

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	Rated Limit	-	-	1600	V
Non-Repetitive Trans. Peak Reverse Voltage	$V_{RSM}$	Rated Limit, $t \leq 5\text{ms}$	-	-	1800	V
Reverse Leakage Current (Peak)	$I_{RRM}$	$V_{RRM} = 1400\text{V}$ , $T_J = +190^\circ\text{C}$	-	-	50	mA
Forward Voltage Drop	$V_F$	$I_F = 800\text{A}$ , $T_J = +25^\circ\text{C}$	-	-	2.0	V
Reverse Recovery Time	$t_{rr}$	$I_{FM} = 785\text{A}$ , $t_p = 100\mu\text{s}$ , $di_R/dt = 25\text{A}/\mu\text{s}$ , $T_C = +25^\circ\text{C}$	-	-	1.0	$\mu\text{s}$

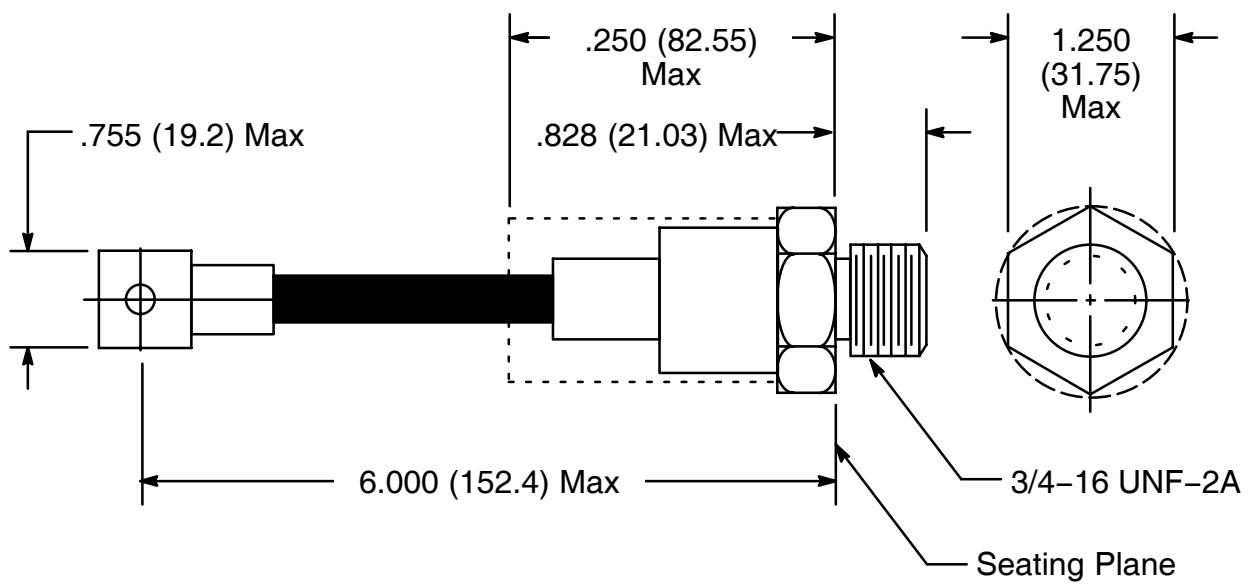

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [nte](#) manufacturer:***

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [47-20848-R](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#) [5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#) [NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#)