



# BFU730LX

NPN wideband silicon germanium RF transistor

Rev. 1 — 8 May 2013

Product data sheet

## 1. Product profile

### 1.1 General description

NPN silicon germanium microwave transistor for high speed, low noise applications in a SOT883C leadless ultra small plastic SMD package.

#### CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices.

Such precautions are described in the *ANSI/ESD S20.20*, *IEC/ST 61340-5*, *JESD625-A* or equivalent standards.

### 1.2 Features and benefits

- Leadless ultra small plastic SMD package 1.0 mm × 0.6 mm × 0.34 mm
- Low noise high gain microwave transistor
- Noise figure (NF) = 0.75 dB at 6 GHz
- High maximum power gain ( $G_{p(max)}$ ) of 15.8 dB at 6 GHz
- Excellent linearity in WiFi LNA from 5 GHz to 5.9 GHz:
  - ◆ input third-order intercept point ( $IP_{3i}$ ) = 15 dBm
  - ◆ input power at 1 dB gain compression ( $P_{i(1dB)}$ ) = 0 dBmSee application note *AN11224: Low Noise Fast Turn ON/OFF 5-5.9GHz WiFi LNA with BFU730LX*.
- 110 GHz  $f_T$  silicon germanium technology

### 1.3 Applications

- Wi-Fi / WLAN
  - See application notes:
    - ◆ *AN11223: Low Noise Fast Turn ON/OFF 2.4-2.5GHz WiFi LNA with BFU730LX*
    - ◆ *AN11224: Low Noise Fast Turn ON/OFF 5-5.9GHz WiFi LNA with BFU730LX*
- WiMAX
- LNA for GPS, GLONASS, Galileo and Compass (BeiDou)
- DBS (2nd LNA stage, mixer stage, DRO), SDARS
- RKE, AMR / Zigbee
- LNA for microwave communications systems
- Low current battery equipped applications
- Microwave driver / buffer applications



### 1.4 Quick reference data

**Table 1. Quick reference data**  
*T<sub>j</sub> = 25 °C unless otherwise specified.*



Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V <sub>CB</sub>	collector-base voltage	open emitter	-	-	10.0	V
V <sub>CE</sub>	collector-emitter voltage	open base	-	-	3.0	V
		shorted base	-	-	10.0	V
V <sub>EB</sub>	emitter-base voltage	open collector	-	-	1.3	V
I <sub>C</sub>	collector current		-	5	30	mA
P <sub>tot</sub>	total power dissipation	T <sub>sp</sub> ≤ 110 °C	[1]	-	160	mW
h <sub>FE</sub>	DC current gain	I <sub>C</sub> = 2 mA; V <sub>CE</sub> = 2 V; T <sub>j</sub> = 25 °C	205	380	555	
f <sub>T</sub>	transition frequency	I <sub>C</sub> = 25 mA; V <sub>CE</sub> = 3 V; f = 2 GHz; T <sub>amb</sub> = 25 °C	-	53	-	GHz
G <sub>p(max)</sub>	maximum power gain	I <sub>C</sub> = 25 mA; V <sub>CE</sub> = 3 V; f = 6 GHz; T <sub>amb</sub> = 25 °C	[2]	15.8	-	dB
NF	noise figure	I <sub>C</sub> = 5 mA; V <sub>CE</sub> = 3 V; f = 6 GHz; Γ <sub>S</sub> = Γ <sub>opt</sub>	-	0.75	-	dB
P <sub>L(1dB)</sub>	output power at 1 dB gain compression	I <sub>C</sub> = 25 mA; V <sub>CE</sub> = 3 V; Z <sub>S</sub> = Z <sub>L</sub> = 50 Ω; f = 1.8 GHz; T <sub>amb</sub> = 25 °C	-	11.7	-	dBm

[1] T<sub>sp</sub> is the temperature at the solder point of the emitter lead.

[2] G<sub>p(max)</sub> is the maximum power gain, if K > 1. If K < 1 then G<sub>p(max)</sub> = Maximum Stable Gain (MSG).

## 2. Pinning information

**Table 2. Discrete pinning**

Pin	Description	Simplified outline	Graphic symbol
1	base	 <p>Transparent top view</p>	 <p>aaa-006018</p>
2	collector		
3	emitter		

## 3. Ordering information

**Table 3. Ordering information**

Type number	Package		
	Name	Description	Version
BFU730LX	-	leadless ultra small plastic package; 3 terminals; body 1 × 0.6 × 0.34 mm	SOT883C

## 4. Marking

Table 4. Marking

Type number	Marking
BFU730LX	ZD

## 5. Design support

Table 5. Available design support

Download from the BFU730LX product page on <http://www.nxp.com>.

Support item	Available	Remarks
Device models for Agilent EEsof EDA ADS	yes	[1] Based on Mextram device model
Device models for Agilent EEsof EDA Genesys	yes	Based on Mextram device model
Device models for AWR Microwave Office	planned	Based on Mextram device model
Device models for ANSYS Ansoft designer	planned	Based on Mextram device model
SPICE model	planned	Based on Gummel-Poon device model
S-parameters	yes	
Noise parameters	yes	
Customer evaluation kit	yes	
Gerber files evaluation board	yes	
Reflow soldering footprint	yes	
AN11223: Low Noise Fast Turn ON/OFF 2.4-2.5GHz WiFi LNA with BFU730LX	yes	Application note
AN11224: Low Noise Fast Turn ON/OFF 5-5.9GHz WiFi LNA with BFU730LX	yes	Application note

[1] See <http://www.nxp.com/models.html>.

## 6. Limiting values

Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{CB}$	collector-base voltage	open emitter	-	10.0	V
$V_{CE}$	collector-emitter voltage	open base	-	3.0	V
		shorted base	-	10.0	V
$V_{EB}$	emitter-base voltage	open collector	-	1.3	V
$P_{tot}$	total power dissipation	$T_{sp} \leq 110\text{ °C}$	[1] -	160	mW
$T_{stg}$	storage temperature		-65	+150	°C
$T_j$	junction temperature		-	150	°C

[1]  $T_{sp}$  is the temperature at the solder point of the emitter lead.

## 7. Recommended operating conditions


**Table 7. Recommended operating conditions**

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$T_j$	junction temperature		-40	-	+125	°C
$I_C$	collector current		-	-	30	mA

## 8. Thermal characteristics

**Table 8. Thermal characteristics**

Symbol	Parameter	Conditions	Typ	Unit
$R_{th(j-sp)}$	thermal resistance from junction to solder point		250	K/W

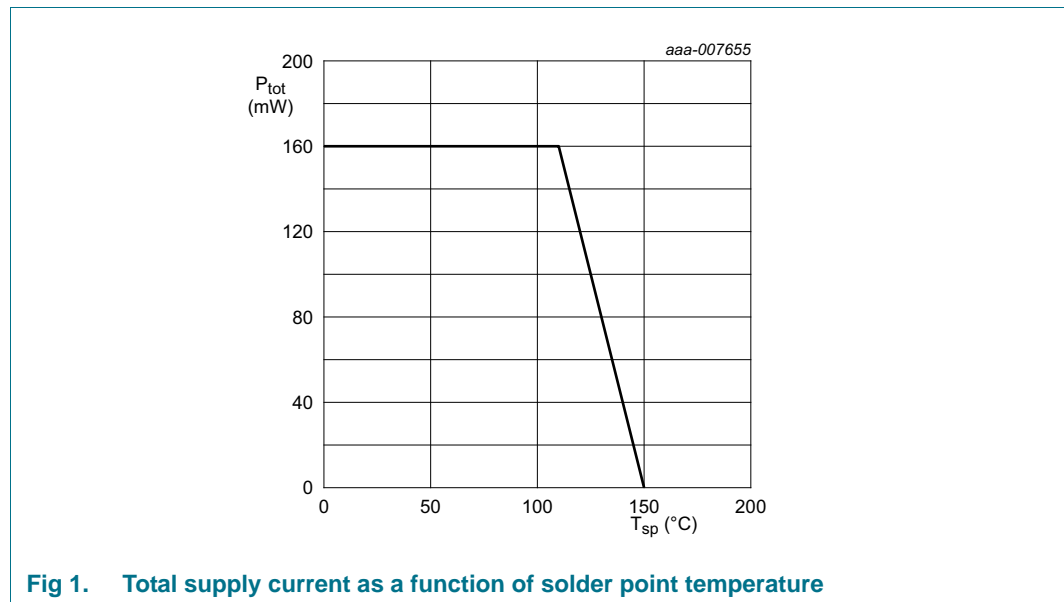

**Fig 1. Total supply current as a function of solder point temperature**

## 9. Characteristics

**Table 9. Characteristics**

$T_j = 25$  °C unless otherwise specified; measurements done on characterization boards.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 2.5 \mu A$ ; $I_E = 0$ mA	10	-	-	V
$V_{(BR)CEO}$	collector-emitter breakdown voltage	$I_C = 1$ mA; $I_B = 0$ mA	3.0	-	-	V
$I_C$	collector current		-	5	30	mA
$I_{CBO}$	collector-base cut-off current	$I_E = 0$ mA; $V_{CB} = 4.5$ V	-	-	100	nA
$h_{FE}$	DC current gain	$I_C = 2$ mA; $V_{CE} = 2$ V	205	380	555	
$C_{CE}$	collector-emitter capacitance	$V_{CE} = 2$ V; $f = 1$ MHz	-	145	-	fF
$C_{EB}$	emitter-base capacitance	$V_{EB} = 0.5$ V; $f = 1$ MHz	-	310	-	fF
$C_{CB}$	collector-base capacitance	$V_{CB} = 2$ V; $f = 1$ MHz	-	84	-	fF
$f_T$	transition frequency	$I_C = 25$ mA; $V_{CE} = 3$ V; $f = 2$ GHz; $T_{amb} = 25$ °C	-	53	-	GHz

**Table 9. Characteristics ...continued**

$T_j = 25\text{ °C}$  unless otherwise specified; measurements done on characterization boards.



Symbol	Parameter	Conditions	Min	Typ	Max	Unit		
$G_{p(max)}$	maximum power gain	$I_C = 5\text{ mA}; V_{CE} = 3\text{ V}; T_{amb} = 25\text{ °C}$	[1]					
		$f = 1.8\text{ GHz}$	-	22.0	-	dB		
		$f = 6\text{ GHz}$	-	15.0	-	dB		
		$I_C = 10\text{ mA}; V_{CE} = 3\text{ V}; T_{amb} = 25\text{ °C}$	[1]					
		$f = 1.8\text{ GHz}$	-	23.6	-	dB		
		$f = 6\text{ GHz}$	-	15.7	-	dB		
		$I_C = 25\text{ mA}; V_{CE} = 3\text{ V}; T_{amb} = 25\text{ °C}$	[1]					
		$f = 1.8\text{ GHz}$	-	24.5	-	dB		
		$f = 6\text{ GHz}$	-	15.8	-	dB		
		$ s_{21} ^2$	insertion power gain	$I_C = 5\text{ mA}; V_{CE} = 3\text{ V}; T_{amb} = 25\text{ °C}$				
				$f = 1.8\text{ GHz}$	-	19.3	-	dB
				$f = 6\text{ GHz}$	-	11.1	-	dB
$I_C = 10\text{ mA}; V_{CE} = 3\text{ V}; T_{amb} = 25\text{ °C}$								
$f = 1.8\text{ GHz}$	-			21.3	-	dB		
$f = 6\text{ GHz}$	-			12.0	-	dB		
$I_C = 25\text{ mA}; V_{CE} = 3\text{ V}; T_{amb} = 25\text{ °C}$								
$f = 1.8\text{ GHz}$	-			22.3	-	dB		
$f = 6\text{ GHz}$	-			12.5	-	dB		
$NF_{min}$	minimum noise figure			$I_C = 5\text{ mA}; V_{CE} = 3\text{ V}; \Gamma_S = \Gamma_{opt}; T_{amb} = 25\text{ °C}$				
				$f = 1.8\text{ GHz}$	-	0.55	-	dB
				$f = 6\text{ GHz}$	-	0.75	-	dB
		$I_C = 10\text{ mA}; V_{CE} = 3\text{ V}; \Gamma_S = \Gamma_{opt}; T_{amb} = 25\text{ °C}$						
		$f = 1.8\text{ GHz}$	-	0.7	-	dB		
		$f = 6\text{ GHz}$	-	0.9	-	dB		
		$I_C = 25\text{ mA}; V_{CE} = 3\text{ V}; \Gamma_S = \Gamma_{opt}; T_{amb} = 25\text{ °C}$						
		$f = 1.8\text{ GHz}$	-	1.1	-	dB		
		$f = 6\text{ GHz}$	-	1.2	-	dB		
		$P_{L(1dB)}$	output power at 1 dB gain compression	$I_C = 5\text{ mA}; V_{CE} = 3\text{ V}; Z_S = Z_L = 50\ \Omega; T_{amb} = 25\text{ °C}$				
				$f = 1.8\text{ GHz}$	-	-3.7	-	dBm
				$f = 6\text{ GHz}$	-	-1.6	-	dBm
$I_C = 10\text{ mA}; V_{CE} = 3\text{ V}; Z_S = Z_L = 50\ \Omega; T_{amb} = 25\text{ °C}$								
$f = 1.8\text{ GHz}$	-			3.5	-	dBm		
$f = 6\text{ GHz}$	-			5.4	-	dBm		
$I_C = 25\text{ mA}; V_{CE} = 3\text{ V}; Z_S = Z_L = 50\ \Omega; T_{amb} = 25\text{ °C}$								
$f = 1.8\text{ GHz}$	-			11.7	-	dBm		
$f = 6\text{ GHz}$	-			12.7	-	dBm		


**Table 9. Characteristics ...continued**

$T_j = 25\text{ °C}$  unless otherwise specified; measurements done on characterization boards.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
IP3 <sub>o</sub>	output third-order intercept point	$I_C = 5\text{ mA}; V_{CE} = 3\text{ V}; Z_S = Z_L = 50\ \Omega;$ $T_{amb} = 25\text{ °C}$	-	14.7	-	dBm
			-	19.0	-	dBm
		$I_C = 10\text{ mA}; V_{CE} = 3\text{ V}; Z_S = Z_L = 50\ \Omega;$ $T_{amb} = 25\text{ °C}$	-	23.8	-	dBm
			-	25.3	-	dBm
		$I_C = 25\text{ mA}; V_{CE} = 3\text{ V}; Z_S = Z_L = 50\ \Omega;$ $T_{amb} = 25\text{ °C}$	-	25.5	-	dBm
			-	26.9	-	dBm

[1]  $G_{p(max)}$  is the maximum power gain, if  $K > 1$ . If  $K < 1$  then  $G_{p(max)} = MSG$ .

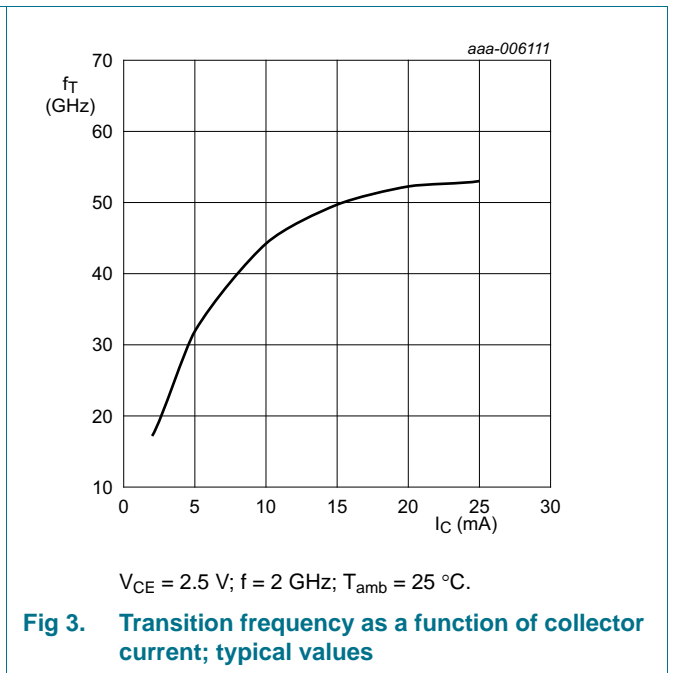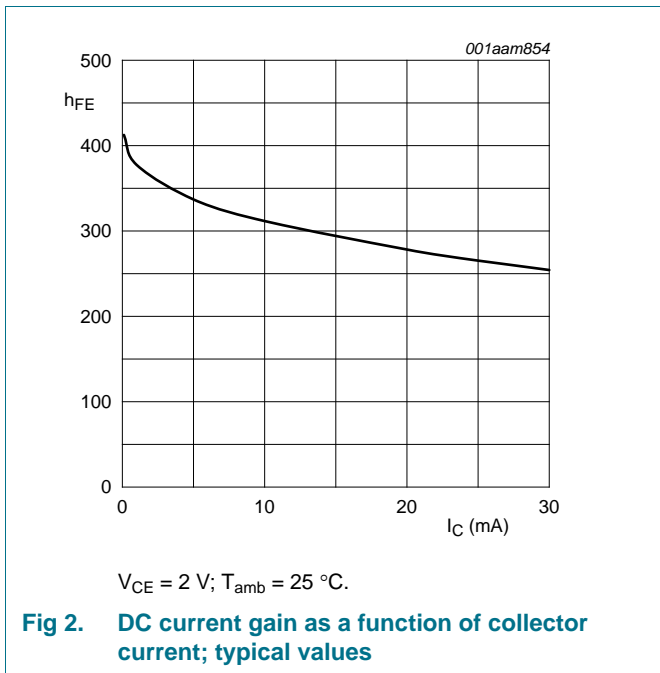


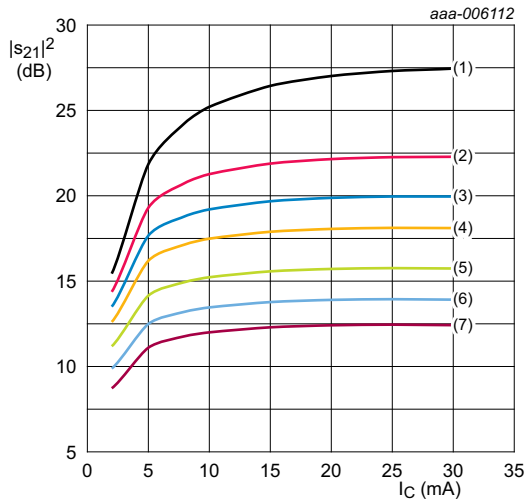

$V_{CE} = 3 \text{ V}; T_{amb} = 25 \text{ }^\circ\text{C}.$


- (1)  $f = 0.9 \text{ GHz}$
- (2)  $f = 1.8 \text{ GHz}$
- (3)  $f = 2.4 \text{ GHz}$
- (4)  $f = 3.0 \text{ GHz}$
- (5)  $f = 4.0 \text{ GHz}$
- (6)  $f = 5.0 \text{ GHz}$
- (7)  $f = 6.0 \text{ GHz}$

**Fig 4. Insertion power gain as a function of collector current; typical value**

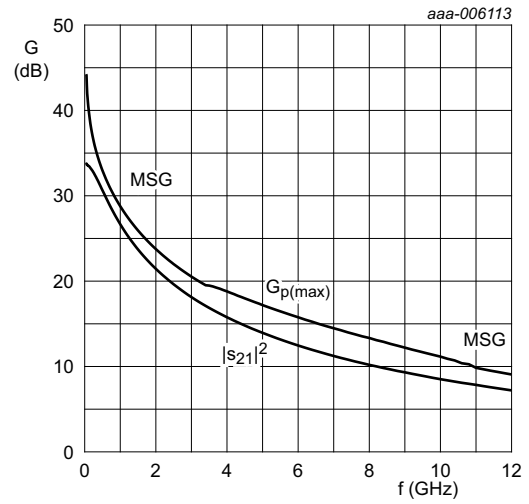

$I_C = 25 \text{ mA}; V_{CE} = 3 \text{ V}; T_{amb} = 25 \text{ }^\circ\text{C}.$


**Fig 5. Gain as a function of frequency; typical values**

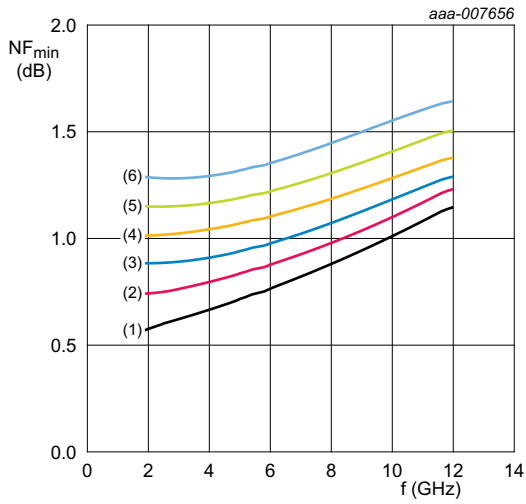

$V_{CE} = 3$  V;  $T_{amb} = 25$  °C.

- (1)  $I_C = 5$  mA
- (2)  $I_C = 10$  mA
- (3)  $I_C = 15$  mA
- (4)  $I_C = 20$  mA
- (5)  $I_C = 25$  mA
- (6)  $I_C = 30$  mA

**Fig 6. Minimum noise figure as a function of frequency; typical values**

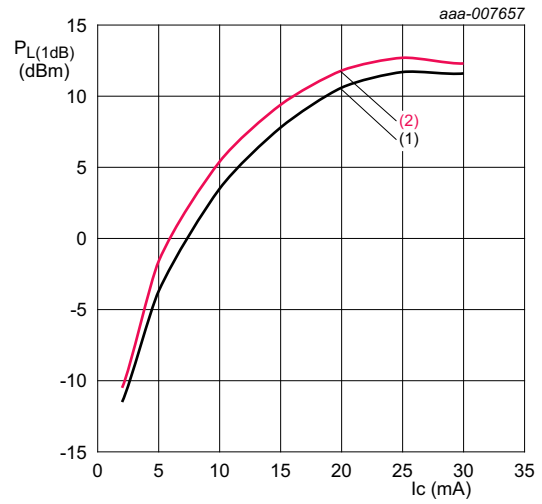

$V_{CE} = 3$  V;  $T_{amb} = 25$  °C.

- (1)  $f = 1.8$  GHz
- (2)  $f = 6$  GHz


**Fig 7. Output power at 1 dB gain compression as a function of collector current; typical values**



## 10. Package outline

Leadless ultra small plastic package; 3 solder lands; body 1.0 x 0.6 x 0.34 mm

SOT883C

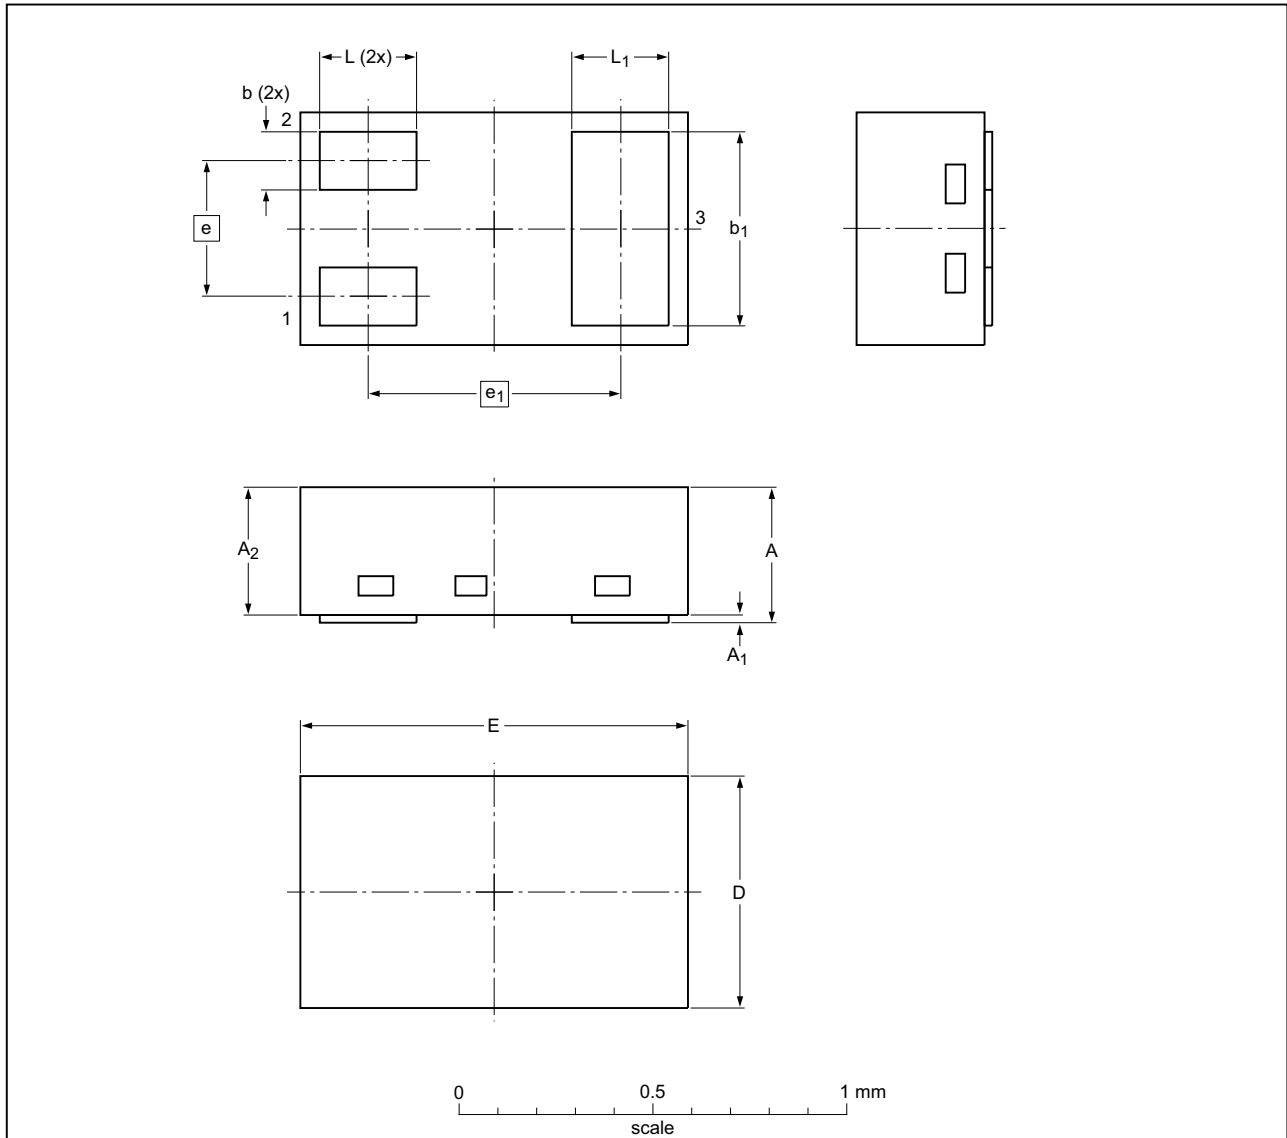

Dimensions (mm are the original dimensions)

Unit	A <sup>(1)</sup>	A <sub>1</sub>	A <sub>2</sub>	E	D	e	e <sub>1</sub>	b	b <sub>1</sub>	L	L <sub>1</sub>
max	0.35	0.04	0.33	1.05	0.65			0.20	0.55	0.30	0.30
nom	0.34			1.00	0.60	0.35	0.65	0.15	0.50	0.25	0.25
min	0.32		0.31	0.95	0.55			0.12	0.47	0.22	0.22

**Notes**

1. Including plating thickness.

sot883c\_po

Outline version	References			European projection	Issue date
	IEC	JEDEC	JEITA		
SOT883C		MO-252			<del>12-11-28</del> 13-04-09

**Fig 8. Package outline SOT883C**

## 11. Abbreviations

**Table 10. Abbreviations**

Acronym	Description
AMR	Automatic Meter Reading
DBS	Direct Broadcast Satellite
DRO	Dielectric Resonator Oscillator
GLONASS	GLObal NAVigation Satellite System
GPS	Global Positioning System
LNA	Low Noise Amplifier
LNB	Low Noise Block
NPN	Negative-Positive-Negative
RKE	Remote Keyless Entry
SDARS	Satellite Digital Audio Radio Service
SMD	Surface-Mounted Device
WiMAX	Worldwide Interoperability for Microwave Access
WLAN	Wireless Local Area Network

## 12. Revision history

**Table 11. Revision history**

Document ID	Release date	Data sheet status	Change notice	Supersedes
BFU730LX v.1	20130508	Product data sheet	-	-

## 13. Legal information

### 13.1 Data sheet status

Document status <sup>[1][2]</sup>	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 13.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 13.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any

liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

## 13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 14. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 15. Contents

<b>1</b>	<b>Product profile</b> . . . . .	<b>1</b>
1.1	General description . . . . .	1
1.2	Features and benefits . . . . .	1
1.3	Applications . . . . .	1
1.4	Quick reference data . . . . .	2
<b>2</b>	<b>Pinning information</b> . . . . .	<b>2</b>
<b>3</b>	<b>Ordering information</b> . . . . .	<b>2</b>
<b>4</b>	<b>Marking</b> . . . . .	<b>3</b>
<b>5</b>	<b>Design support</b> . . . . .	<b>3</b>
<b>6</b>	<b>Limiting values</b> . . . . .	<b>3</b>
<b>7</b>	<b>Recommended operating conditions</b> . . . . .	<b>4</b>
<b>8</b>	<b>Thermal characteristics</b> . . . . .	<b>4</b>
<b>9</b>	<b>Characteristics</b> . . . . .	<b>4</b>
<b>10</b>	<b>Package outline</b> . . . . .	<b>9</b>
<b>11</b>	<b>Abbreviations</b> . . . . .	<b>10</b>
<b>12</b>	<b>Revision history</b> . . . . .	<b>10</b>
<b>13</b>	<b>Legal information</b> . . . . .	<b>11</b>
13.1	Data sheet status . . . . .	11
13.2	Definitions . . . . .	11
13.3	Disclaimers . . . . .	11
13.4	Trademarks . . . . .	12
<b>14</b>	<b>Contact information</b> . . . . .	<b>12</b>
<b>15</b>	<b>Contents</b> . . . . .	<b>13</b>

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2013.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 8 May 2013

Document identifier: BFU730LX

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Bipolar Transistors](#) category:*

*Click to view products by [NXP](#) manufacturer:*

Other Similar products are found below :

[MAPRST0912-50](#) [MCH4016-TL-H](#) [MMBT5551-G](#) [MRF10120](#) [15GN01CA-TB-E](#) [PH1214-25M](#) [MAPRST0912-350](#) [MMBTH10-TP](#) [BFP640F H6327](#) [BFP 720F H6327](#) [BFP 740F H6327](#) [BFR 360F H6765](#) [MRF10031](#) [NSVF4009SG4T1G](#) [BFP 182R E7764](#) [BFP405H6740XTSA1](#) [MRF10350](#) [ASMA201](#) [BFR360FH6765XTSA1](#) [BFP410H6327XTSA1](#) [BFP620FH7764XTSA1](#) [BFP720ESDH6327XTSA1](#) [BFP720FH6327XTSA1](#) [BFR360L3E6765XTMA1](#) [BFP420H6433XTMA1](#) [BFP420H6740XTSA1](#) [BFP420H6801XTSA1](#) [MCH4015-TL-H](#) [BF888H6327XTSA1](#) [MMBT2222A-G](#) [BFP196WH6327XTSA1](#) [BFP405FH6327XTSA1](#) [BFP640ESDH6327XTSA1](#) [BFR193L3E6327XTMA1](#) [BFS483H6327XTSA1](#) [NSVF4020SG4T1G](#) [NSVF6003SB6T1G](#) [MRF10005](#) [BFP420FH6327XTSA1](#) [BFP740FESDH6327XTSA1](#) [BFR181E6327HTSA1](#) [BFR181WH6327XTSA1](#) [BFR182E6327HTSA1](#) [BFR193E6327HTSA1](#) [BFP181E7764HTSA1](#) [BFP183WH6327XTSA1](#) [BFP720H6327XTSA1](#) [BFR182WH6327XTSA1](#) [BFU590GX](#) [MAPR-000912-500S00](#)