


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 4772: ADDED ROHS STAMP & PS-0031 PACKAGING SPEC	5/24/10	D. CASTRO
G	ECN 5508: ADDED TRD695VLT-XX	5/17/11	D. CASTRO
-	-	-	-
-	-	-	-

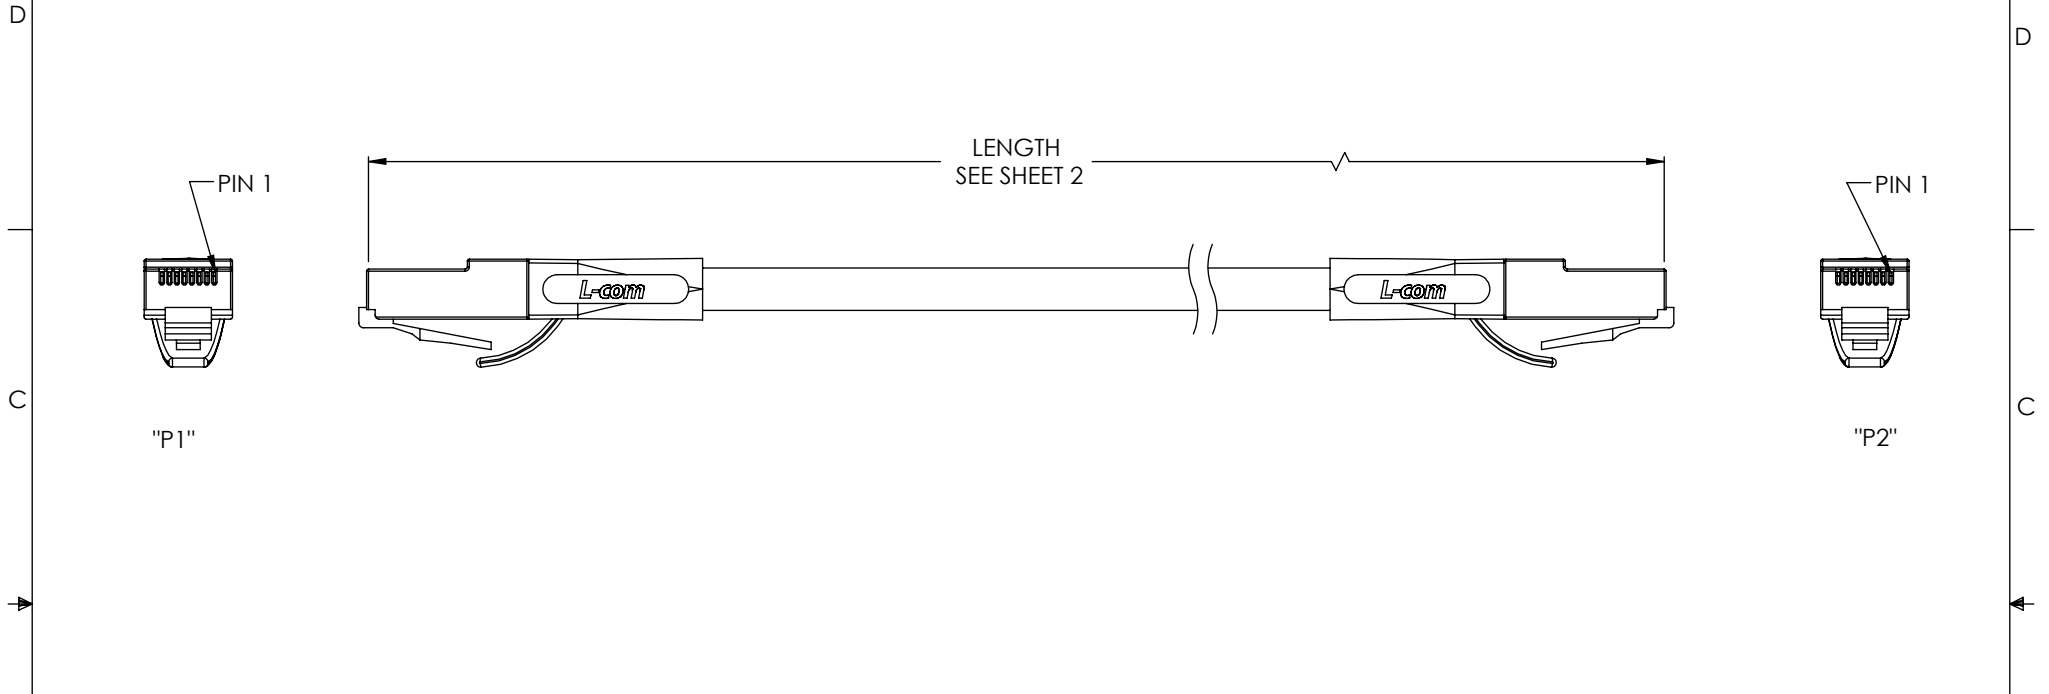

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE
 CABLE JACKET: PVC (SEE SHEET 2 FOR COLORS)
 SNAGLESS BOOT: CLEAR PVC

FINISH:

CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL



CABLE CHARACTERISTICS:

UNSHIELDED, FOUR TWISTED PAIR, CAT 6 MODULAR CABLE
 CONDUCTORS: 24 AWG (7/32) STRANDED COPPER

MISCELLANEOUS:

ASSEMBLY WIRED PER TIA/EIA 568B SEQUENCE
 PLUG CONFORMS TO TIA-1096
 OPERATING TEMPERATURE RANGE: -20°C TO +75°C
 CABLES TO BE TESTED FOR CONTINUITY
 CABLES TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031


RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	07/18/2006	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY ENG	07/18/2006	CATEGORY MODULAR
	APPROVED BY J.ROBERTS	07/18/2006	PRODUCT DESCRIPTION CATEGORY 6 PATCH CORD
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. TRD695 REV. G SCALE: NONE CAD FILE: TRD695.SLDDRW SHEET 1 OF 2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

PART NUMBER	LENGTH		PART NUMBER	LENGTH		PART NUMBER	LENGTH		PART NUMBER	LENGTH	
	FEET	METERS		FEET	METERS		FEET	METERS		FEET	METERS
TRD695BLK-1	1.0	0.31	TRD695R-1	1.0	0.31	TRD695GR-1	1.0	0.31	TRD695WHT-1	1.0	0.31
TRD695BLK-2	2.0	0.61	TRD695R-2	2.0	0.61	TRD695GR-2	2.0	0.61	TRD695WHT-2	2.0	0.61
TRD695BLK-3	3.0	0.91	TRD695R-3	3.0	0.91	TRD695GR-3	3.0	0.91	TRD695WHT-3	3.0	0.91
TRD695BLK-5	5.0	1.52	TRD695R-5	5.0	1.52	TRD695GR-5	5.0	1.52	TRD695WHT-5	5.0	1.52
TRD695BLK-7	7.0	2.13	TRD695R-7	7.0	2.13	TRD695GR-7	7.0	2.13	TRD695WHT-7	7.0	2.13
TRD695BLK-10	10.0	3.05	TRD695R-10	10.0	3.05	TRD695GR-10	10.0	3.05	TRD695WHT-10	10.0	3.05
TRD695BLK-14	14.0	4.26	TRD695R-14	14.0	4.26	TRD695GR-14	14.0	4.26	TRD695WHT-14	14.0	4.26
TRD695BLK-20	20.0	6.10	TRD695R-20	20.0	6.10	TRD695GR-20	20.0	6.10	TRD695WHT-20	20.0	6.10
TRD695BLK-25	25.0	7.62	TRD695R-25	25.0	7.62	TRD695GR-25	25.0	7.62	TRD695WHT-25	25.0	7.62
TRD695BLK-30	30.0	9.14	TRD695R-30	30.0	9.14	TRD695GR-30	30.0	9.14	TRD695WHT-30	30.0	9.14
TRD695BLK-40	40.0	12.19	TRD695R-40	40.0	12.19	TRD695GR-40	40.0	12.19	TRD695WHT-40	40.0	12.19
TRD695BLK-50	50.0	15.24	TRD695R-50	50.0	15.24	TRD695GR-50	50.0	15.24	TRD695WHT-50	50.0	15.24
TRD695BLK-60	60.0	18.29	TRD695R-60	60.0	18.29	TRD695GR-60	60.0	18.29	TRD695WHT-60	60.0	18.29
TRD695BLK-75	75.0	22.86	TRD695R-75	75.0	22.86	TRD695GR-75	75.0	22.86	TRD695WHT-75	75.0	22.86
TRD695BLK-80	80.0	24.38	TRD695R-80	80.0	24.38	TRD695GR-80	80.0	24.38	TRD695WHT-80	80.0	24.38
TRD695BLK-90	90.0	27.43	TRD695R-90	90.0	27.43	TRD695GR-90	90.0	27.43	TRD695WHT-90	90.0	27.43
TRD695BLK-100	100.0	30.48	TRD695R-100	100.0	30.48	TRD695GR-100	100.0	30.48	TRD695WHT-100	100.0	30.48
TRD695BL-1	1.0	0.31	TRD695Y-1	1.0	0.31	TRD695GRY-1	1.0	0.31	TRD695VLT-1	1.0	0.31
TRD695BL-2	2.0	0.61	TRD695Y-2	2.0	0.61	TRD695GRY-2	2.0	0.61	TRD695VLT-2	2.0	0.61
TRD695BL-3	3.0	0.91	TRD695Y-3	3.0	0.91	TRD695GRY-3	3.0	0.91	TRD695VLT-3	3.0	0.91
TRD695BL-5	5.0	1.52	TRD695Y-5	5.0	1.52	TRD695GRY-5	5.0	1.52	TRD695VLT-5	5.0	1.52
TRD695BL-7	7.0	2.13	TRD695Y-7	7.0	2.13	TRD695GRY-7	7.0	2.13	TRD695VLT-7	7.0	2.13
TRD695BL-10	10.0	3.05	TRD695Y-10	10.0	3.05	TRD695GRY-10	10.0	3.05	TRD695VLT-10	10.0	3.05
TRD695BL-14	14.0	4.26	TRD695Y-14	14.0	4.26	TRD695GRY-14	14.0	4.26	TRD695VLT-14	14.0	4.26
TRD695BL-20	20.0	6.10	TRD695Y-20	20.0	6.10	TRD695GRY-20	20.0	6.10	TRD695VLT-20	20.0	6.10
TRD695BL-25	25.0	7.62	TRD695Y-25	25.0	7.62	TRD695GRY-25	25.0	7.62	TRD695VLT-25	25.0	7.62
TRD695BL-30	30.0	9.14	TRD695Y-30	30.0	9.14	TRD695GRY-30	30.0	9.14	TRD695VLT-30	30.0	9.14
TRD695BL-40	40.0	12.19	TRD695Y-40	40.0	12.19	TRD695GRY-40	40.0	12.19	TRD695VLT-40	40.0	12.19
TRD695BL-50	50.0	15.24	TRD695Y-50	50.0	15.24	TRD695GRY-50	50.0	15.24	TRD695VLT-50	50.0	15.24
TRD695BL-60	60.0	18.29	TRD695Y-60	60.0	18.29	TRD695GRY-60	60.0	18.29	TRD695VLT-60	60.0	18.29
TRD695BL-75	75.0	22.86	TRD695Y-75	75.0	22.86	TRD695GRY-75	75.0	22.86	TRD695VLT-75	75.0	22.86
TRD695BL-80	80.0	24.38	TRD695Y-80	80.0	24.38	TRD695GRY-80	80.0	24.38	TRD695VLT-80	80.0	24.38
TRD695BL-90	90.0	27.43	TRD695Y-90	90.0	27.43	TRD695GRY-90	90.0	27.43	TRD695VLT-90	90.0	27.43
TRD695BL-100	100.0	30.48	TRD695Y-100	100.0	30.48	TRD695GRY-100	100.0	30.48	TRD695VLT-100	100.0	30.48

BLK = BLACK
 BL = BLUE
 GR = GREEN
 R = RED
 Y = YELLOW
 GRY = GRAY
 WHT = WHITE
 VLT = VIOLET

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY MODULAR			
PRODUCT DESCRIPTION CATEGORY 6 PATCH CORD			
SIZE A	FSCM NO. 43321	DWG. NO. TRD695	REV. G
SCALE: NONE		CAD FILE: TRD695.SLDDRW	
			SHEET 2 OF 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [l-com manufacturer](#):

Other Similar products are found below :

[FOA-550A](#) [SDRA15AG](#) [UMC-201](#) [CSMN50MF-5](#) [CSMNB15MF-15](#) [TRD815RA2BL-5](#) [CA3N050](#) [CA3A-90DA-1M](#) [U3A00003-03M](#)
[CTLF3VGAMM-20](#) [HDCAMM-3](#) [U3A00014-03M](#) [ECF-SK-25](#) [CSMT15MF-10](#) [CSMT15MM-15](#) [CSMT15MM-25](#) [CSPL15MF-50](#)
[CSPL25MF-25](#) [CSPL9MF-10](#) [CSPL9MF-5](#) [CSPL25MF-5](#) [CSPL25MF-2.5](#) [AL-IPEPS](#) [NB201611-10F-1](#) [TDG1026KC5-MNL](#) [NB121005-](#)
[10F](#) [TRD855SRA6DBL-05M](#) [TRD855SRA6DBL-10M](#) [TRD855SRA7DBL-1M](#) [TRD855SRA7DBL-10M](#) [PR175SCDLCQ24](#) [TRG508-T4T-](#)
[3M](#) [TRA5261-15F](#) [TRA5261S-1F](#) [TRA6261-1F](#) [TRA6261-10F](#) [USBBFT](#) [DGB25M](#) [CASATAL-18](#) [CSM25MM-10](#) [CSM37MF-10](#)
[CSUSB-100](#) [CA3A-90RA-1M](#) [CA3A-90RMICB-1M](#) [U2A00003-3M](#) [U3A00003-05M](#) [U2A00008-12I](#) [U3A00056-03M](#) [U3A00007-075M](#)
[U3A00007-1M](#)