


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	ECN 3423: ADD LENGTHS 60 FT, 80FT AND 90FT	6/30/08	D.GRIFFIN
K	ECN 4643: ADDED ROHS, NEW FORMAT AND REVISED PACKAGING	3/26/10	D.FRISIELLO
L	ECN 4733: ADD COLORS BLUE, BLACK, RED, YELLOW AND GREEN TO CHARTS	5/10/10	D.FRISIELLO
M	ECN 5677: REMOVED "PLUG SHIELDING: COPPER"	9/2/11	D.FRISIELLO

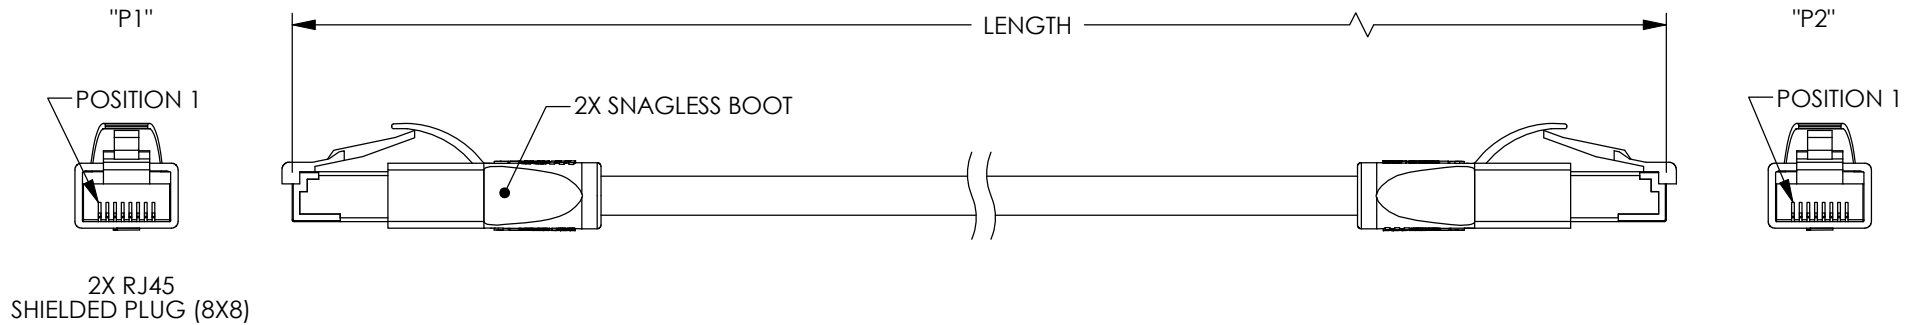

**NOTES:**

**MATERIAL:**

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0  
 CONTACTS: PHOSPHOR BRONZE  
 CABLE JACKET: PVC, SEE CHARTS (SHEET 2 OF 2)  
 SNAGLESS BOOT: BLACK, LSZH THERMOPLASTIC

**FINISH:**

CONTACTS: 50 μINCHES GOLD IN CONTACT AREA  
 OVER 100 μINCHES NICKEL PLATE OVERALL.  
 PLUG SHIELDING: NICKEL PLATED

**CABLE CHARACTERISTICS:**

SHIELD: ALUMINUM/POLYESTER WITH DRAIN WIRE  
 FOUR TWISTED PAIR MODULAR CABLE, 26 AWG (7X34)  
 STRANDED COPPER; UL STYLE 2835 COMMUNICATIONS CABLE

**ELECTRICAL:**

ASSEMBLY WIRED PER TIA/EIA 568B SEQUENCE  
 DRAIN WIRE TIED TO PLUG SHIELDS  
 NOMINAL IMPEDANCE: 100Ω

**MISCELLANEOUS:**

PLUG CONFORMS TO TIA-1096  
 OPERATING TEMPERATURE RANGE: 0°C TO +60°C.  
 CABLES TO BE TESTED FOR CONTINUITY.  
 CABLES TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.



RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	10/2/2000		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY T. CLARK	10/3/2000	PRODUCT DESCRIPTION	
PROJECTION 	APPROVED BY R. CARRICK	10/03/2000	CATEGORY 5E PATCH CORD	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE <b>A</b>	FSCM NO. <b>43321</b>
	COLOR VARIATIONS MAY OCCUR		DWG. NO. TRD855SCR	REV. <b>M</b>
			SCALE: NONE	CAD FILE: TRD855SCR.SLDDRW
				SHEET 1 OF 2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

PART NUMBER	LENGTH		COLOR
	FEET	METERS	
TRD855SCR-1	1.0	.31	GRAY
TRD855SCR-2	2.0	.61	GRAY
TRD855SCR-3	3.0	.91	GRAY
TRD855SCR-5	5.0	1.52	GRAY
TRD855SCR-7	7.0	2.13	GRAY
TRD855SCR-10	10.0	3.05	GRAY
TRD855SCR-15	15.0	4.57	GRAY
TRD855SCR-20	20.0	6.10	GRAY
TRD855SCR-25	25.0	7.62	GRAY
TRD855SCR-30	30.0	9.14	GRAY
TRD855SCR-40	40.0	12.19	GRAY
TRD855SCR-50	50.0	15.24	GRAY
TRD855SCR-60	60.0	18.29	GRAY
TRD855SCR-75	75.0	22.86	GRAY
TRD855SCR-80	80.0	24.38	GRAY
TRD855SCR-90	90.0	27.43	GRAY
TRD855SCR-100	100.0	30.48	GRAY


TRD855SCRBL-1	1.0	.31	BLUE
TRD855SCRBL-2	2.0	.61	BLUE
TRD855SCRBL-3	3.0	.91	BLUE
TRD855SCRBL-5	5.0	1.52	BLUE
TRD855SCRBL-7	7.0	2.13	BLUE
TRD855SCRBL-10	10.0	3.05	BLUE
TRD855SCRBL-15	15.0	4.57	BLUE
TRD855SCRBL-20	20.0	6.10	BLUE
TRD855SCRBL-25	25.0	7.62	BLUE
TRD855SCRBL-30	30.0	9.14	BLUE
TRD855SCRBL-40	40.0	12.19	BLUE
TRD855SCRBL-50	50.0	15.24	BLUE
TRD855SCRBL-60	60.0	18.29	BLUE
TRD855SCRBL-75	75.0	22.86	BLUE
TRD855SCRBL-80	80.0	24.38	BLUE
TRD855SCRBL-90	90.0	27.43	BLUE
TRD855SCRBL-100	100.0	30.48	BLUE

PART NUMBER	LENGTH		COLOR
	FEET	METERS	
TRD855SCRGR-1	1.0	.31	GREEN
TRD855SCRGR-2	2.0	.61	GREEN
TRD855SCRGR-3	3.0	.91	GREEN
TRD855SCRGR-5	5.0	1.52	GREEN
TRD855SCRGR-7	7.0	2.13	GREEN
TRD855SCRGR-10	10.0	3.05	GREEN
TRD855SCRGR-15	15.0	4.57	GREEN
TRD855SCRGR-20	20.0	6.10	GREEN
TRD855SCRGR-25	25.0	7.62	GREEN
TRD855SCRGR-30	30.0	9.14	GREEN
TRD855SCRGR-40	40.0	12.19	GREEN
TRD855SCRGR-50	50.0	15.24	GREEN
TRD855SCRGR-60	60.0	18.29	GREEN
TRD855SCRGR-75	75.0	22.86	GREEN
TRD855SCRGR-80	80.0	24.38	GREEN
TRD855SCRGR-90	90.0	27.43	GREEN
TRD855SCRGR-100	100.0	30.48	GREEN

TRD855SCRBLK-1	1.0	.31	BLACK
TRD855SCRBLK-2	2.0	.61	BLACK
TRD855SCRBLK-3	3.0	.91	BLACK
TRD855SCRBLK-5	5.0	1.52	BLACK
TRD855SCRBLK-7	7.0	2.13	BLACK
TRD855SCRBLK-10	10.0	3.05	BLACK
TRD855SCRBLK-15	15.0	4.57	BLACK
TRD855SCRBLK-20	20.0	6.10	BLACK
TRD855SCRBLK-25	25.0	7.62	BLACK
TRD855SCRBLK-30	30.0	9.14	BLACK
TRD855SCRBLK-40	40.0	12.19	BLACK
TRD855SCRBLK-50	50.0	15.24	BLACK
TRD855SCRBLK-60	60.0	18.29	BLACK
TRD855SCRBLK-75	75.0	22.86	BLACK
TRD855SCRBLK-80	80.0	24.38	BLACK
TRD855SCRBLK-90	90.0	27.43	BLACK
TRD855SCRBLK-100	100.0	30.48	BLACK

PART NUMBER	LENGTH		COLOR
	FEET	METERS	
TRD855SCRRD-1	1.0	.31	RED
TRD855SCRRD-2	2.0	.61	RED
TRD855SCRRD-3	3.0	.91	RED
TRD855SCRRD-5	5.0	1.52	RED
TRD855SCRRD-7	7.0	2.13	RED
TRD855SCRRD-10	10.0	3.05	RED
TRD855SCRRD-15	15.0	4.57	RED
TRD855SCRRD-20	20.0	6.10	RED
TRD855SCRRD-25	25.0	7.62	RED
TRD855SCRRD-30	30.0	9.14	RED
TRD855SCRRD-40	40.0	12.19	RED
TRD855SCRRD-50	50.0	15.24	RED
TRD855SCRRD-60	60.0	18.29	RED
TRD855SCRRD-75	75.0	22.86	RED
TRD855SCRRD-80	80.0	24.38	RED
TRD855SCRRD-90	90.0	27.43	RED
TRD855SCRRD-100	100.0	30.48	RED

TRD855SCRY-1	1.0	.31	YELLOW
TRD855SCRY-2	2.0	.61	YELLOW
TRD855SCRY-3	3.0	.91	YELLOW
TRD855SCRY-5	5.0	1.52	YELLOW
TRD855SCRY-7	7.0	2.13	YELLOW
TRD855SCRY-10	10.0	3.05	YELLOW
TRD855SCRY-15	15.0	4.57	YELLOW
TRD855SCRY-20	20.0	6.10	YELLOW
TRD855SCRY-25	25.0	7.62	YELLOW
TRD855SCRY-30	30.0	9.14	YELLOW
TRD855SCRY-40	40.0	12.19	YELLOW
TRD855SCRY-50	50.0	15.24	YELLOW
TRD855SCRY-60	60.0	18.29	YELLOW
TRD855SCRY-75	75.0	22.86	YELLOW
TRD855SCRY-80	80.0	24.38	YELLOW
TRD855SCRY-90	90.0	27.43	YELLOW
TRD855SCRY-100	100.0	30.48	YELLOW

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY <b>MODULAR</b>			
PRODUCT DESCRIPTION <b>CATEGORY 5E PATCH CORD</b>			
SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>TRD855SCR</b>	REV. <b>M</b>
SCALE: NONE		CAD FILE: TRD855SCR.SLDDRW	
			SHEET 2 OF 2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [l-com manufacturer](#):*

Other Similar products are found below :

[FOA-550A](#) [UMC-201](#) [CSMN50MF-5](#) [CSMNB15MF-15](#) [TRD815RA2BL-5](#) [CA3A-90DA-1M](#) [CTLF3VGAMM-20](#) [HDCAMM-3](#)  
[U3A00014-03M](#) [CSMT15MF-10](#) [CSMT15MM-15](#) [CSMT15MM-25](#) [CSPL15MF-50](#) [CSPL25MF-25](#) [CSPL9MF-10](#) [CSPL9MF-5](#)  
[CSPL25MF-5](#) [CSPL25MF-2.5](#) [AL-IPEPS](#) [NB201611-10F-1](#) [TDG1026KC5-MNL](#) [NB121005-10F](#) [TRD855SRA6DBL-10M](#)  
[TRD855SRA7DBL-1M](#) [TRD855SRA7DBL-10M](#) [U2A00017-05M](#) [PR175SCDLCQ24](#) [TRG508-T4T-3M](#) [TRA5261-15F](#) [TRA5261S-1F](#)  
[TRA6261-1F](#) [USBBFT](#) [DGB25M](#) [HG2403RD-RSF](#) [CASATAL-18](#) [CSM25MM-10](#) [CSM37MF-10](#) [CSUSB-100](#) [CA3A-90RA-1M](#) [CA3A-](#)  
[90RMICB-1M](#) [U2A00003-3M](#) [U3A00003-05M](#) [U2A00008-12I](#) [U3A00007-075M](#) [U3A00007-1M](#) [HGV-903U](#) [CSMT15MF-5](#)  
[CSMT15MM-50](#) [CSPL15MF-25](#) [LPXT-WP-PMT](#)