



RF Power LDMOS Transistors

N-Channel Enhancement-Mode Lateral MOSFETs

These high power transistors are designed for use in UHF TV broadcast applications. The devices have an integrated input matching network for better power distribution and are ideal for use in both analog and digital TV transmitters.

DBV-T Broadband Class AB Performance: $V_{DD} = 50$ Vdc, $I_{DQ} = 1400$ mA, Channel Bandwidth = 8 MHz, Input Signal PAR = 9.5 dB @ 0.01% Probability on CCDF.

| Signal Type | P_{out} (W) | f (MHz) | G_{ps} (dB) | η_D (%) | Output PAR (dB) |
|-----------------|---------------|---------|---------------|--------------|-----------------|
| DVB-T (8k OFDM) | 140 Avg. | 474 | 20.2 | 29.7 | 8.9 |
| | | 610 | 20.7 | 34.5 | 8.2 |
| | | 810 | 20.0 | 34.0 | 8.4 |

Load Mismatch/Ruggedness


| Frequency (MHz) | Signal Type | VSWR | P_{out} (W) | Test Voltage | Result |
|-----------------|-----------------|--------------------------|----------------------|--------------|-----------------------|
| 860 | DVB-T (8k OFDM) | 20:1 at all Phase Angles | 125 (3 dB Overdrive) | 50 | No Device Degradation |

Features


- Excellent thermal characteristics
- High gain for reduced PA size
- High efficiency for Class AB and Doherty operations
- Integrated input matching and unmatched output
- Extended negative gate-source voltage range of -6 Vdc to $+10$ Vdc

MRFE8VP8600H
MRFE8VP8600HS


470–860 MHz, 140 W AVG., 50 V
RF POWER LDMOS TRANSISTORS

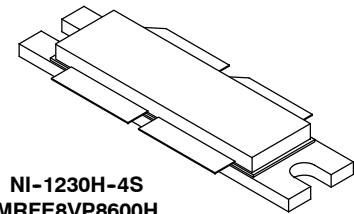

NI-1230H-4S
MRFE8VP8600H



NI-1230S-4S
MRFE8VP8600HS

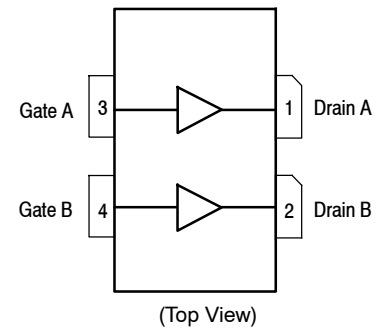

Note: The backside of the package is the source terminal for the transistor.

Figure 1. Pin Connections

Table 1. Maximum Ratings

| Rating | Symbol | Value | Unit |
|--|-----------|--------------|-----------|
| Drain-Source Voltage | V_{DSS} | -0.5, +115 | Vdc |
| Gate-Source Voltage | V_{GS} | -6.0, +10 | Vdc |
| Storage Temperature Range | T_{stg} | -65 to +150 | °C |
| Case Operating Temperature Range | T_C | -40 to +150 | °C |
| Operating Junction Temperature Range (1) | T_J | -40 to +225 | °C |
| Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C | P_D | 1250 6.25 | W W/°C |

Table 2. Thermal Characteristics

| Characteristic | Symbol | Value (2,3) | Unit |
|---|-----------------|-------------|------|
| Thermal Resistance, Junction to Case Case Temperature 99°C, 125 W DVB-T (8k OFDM), 50 Vdc, $I_{DQ} = 1400$ mA, 860 MHz | $R_{\theta JC}$ | 0.16 | °C/W |

Table 3. ESD Protection Characteristics

| Test Methodology | Class |
|---------------------------------------|-------------------|
| Human Body Model (per JESD22-A114) | 2, passes 2500 V |
| Machine Model (per EIA/JESD22-A115) | B, passes 250 V |
| Charge Device Model (per JESD22-C101) | IV, passes 2000 V |

Table 4. Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

Off Characteristics (4)

| | | | | | |
|--|---------------|-----|-----|----|-----------------|
| Gate-Source Leakage Current ($V_{GS} = 5$ Vdc, $V_{DS} = 0$ Vdc) | I_{GSS} | — | — | 1 | μAdc |
| Drain-Source Breakdown Voltage ($V_{GS} = 0$ Vdc, $I_D = 10$ μAdc) | $V_{(BR)DSS}$ | 115 | 118 | — | Vdc |
| Zero Gate Voltage Drain Leakage Current ($V_{DS} = 50$ Vdc, $V_{GS} = 0$ Vdc) | I_{DSS} | — | — | 5 | μAdc |
| Zero Gate Voltage Drain Leakage Current ($V_{DS} = 115$ Vdc, $V_{GS} = 0$ Vdc) | I_{DSS} | — | — | 20 | μAdc |

On Characteristics

| | | | | | |
|--|--------------|-----|------|-----|-----|
| Gate Threshold Voltage (4) ($V_{DS} = 10$ Vdc, $I_D = 925$ μAdc) | $V_{GS(th)}$ | 1.3 | 2.1 | 2.3 | Vdc |
| Gate Quiescent Voltage (5) ($V_{DD} = 50$ Vdc, $I_D = 1400$ mAdc, Measured in Functional Test) | $V_{GS(Q)}$ | 1.8 | 2.4 | 2.8 | Vdc |
| Drain-Source On-Voltage (4) ($V_{GS} = 10$ Vdc, $I_D = 2.8$ Adc) | $V_{DS(on)}$ | 0.1 | 0.3 | 0.5 | Vdc |
| Forward Transconductance ($V_{DS} = 10$ Vdc, $I_D = 17$ Adc) | g_{fs} | — | 19.4 | — | S |

Dynamic Characteristics (4)

| | | | | | |
|---|-----------|---|------|---|----|
| Reverse Transfer Capacitance (6) ($V_{DS} = 50$ Vdc \pm 30 mV(rms)ac @ 1 MHz, $V_{GS} = 0$ Vdc) | C_{rss} | — | 1.62 | — | pF |
| Output Capacitance (6) ($V_{DS} = 50$ Vdc \pm 30 mV(rms)ac @ 1 MHz, $V_{GS} = 0$ Vdc) | C_{oss} | — | 71.2 | — | pF |
| Input Capacitance (7) ($V_{DS} = 50$ Vdc, $V_{GS} = 0$ Vdc \pm 30 mV(rms)ac @ 1 MHz) | C_{iss} | — | 452 | — | pF |

1. Continuous use at maximum temperature will affect MTTF.
2. MTTF calculator available at <http://www.nxp.com/RF/calculators>.
3. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.nxp.com/RF> and search for AN1955.
4. Each side of device measured separately.
5. Measurement made with device in push-pull configuration.
6. Part internally input matched.
7. Die capacitance value without internal matching.

(continued)

Table 4. Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) (continued)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|----------|------|-------|-------|------|
| Functional Tests ⁽¹⁾ (In NXP Narrowband Test Fixture, 50 ohm system) $V_{DD} = 50\text{ Vdc}$, $I_{DQ} = 1400\text{ mA}$, $P_{out} = 125\text{ W Avg.}$, $f = 860\text{ MHz}$, DVB-T (8k OFDM) Single Channel. ACPR measured in 7.61 MHz Signal Bandwidth @ $\pm 4\text{ MHz}$ Offset with an Integration Bandwidth of 4 kHz. | | | | | |
| Power Gain | G_{ps} | 20.6 | 21.0 | 23.6 | dB |
| Drain Efficiency | η_D | 28.0 | 30.0 | — | % |
| Adjacent Channel Power Ratio | ACPR | — | -61.0 | -59.4 | dBc |
| Input Return Loss | IRL | — | -12 | -9 | dB |


Typical DVB-T (8k OFDM) Performance (In NXP Narrowband Test Fixture, 50 ohm system) $V_{DD} = 50\text{ Vdc}$, $I_{DQ} = 1400\text{ mA}$, $f = 860\text{ MHz}$, DVB-T (8k OFDM) Single Channel.

| | | | | | |
|---|--------|--------------------------------|-----|---|----|
| Output Peak-to-Average Ratio @ 0.01% Probability on CCDF, $P_{out} = 125\text{ W Avg.}$ | PAR | — | 7.8 | — | dB |
| Load Mismatch VSWR 20:1 at all Phase Angles, 3 dB Overdrive from Rated P_{out} (125 W Avg.) | Ψ | No Degradation in Output Power | | | |

Table 5. Ordering Information

| Device | Tape and Reel Information | Package |
|-----------------|--|-------------|
| MRFE8VP8600HR5 | R5 Suffix = 50 Units, 56 mm Tape Width, 13-inch Reel | NI-1230H-4S |
| MRFE8VP8600HSR5 | | NI-1230S-4S |

1. Measurement made with device in push-pull configuration.

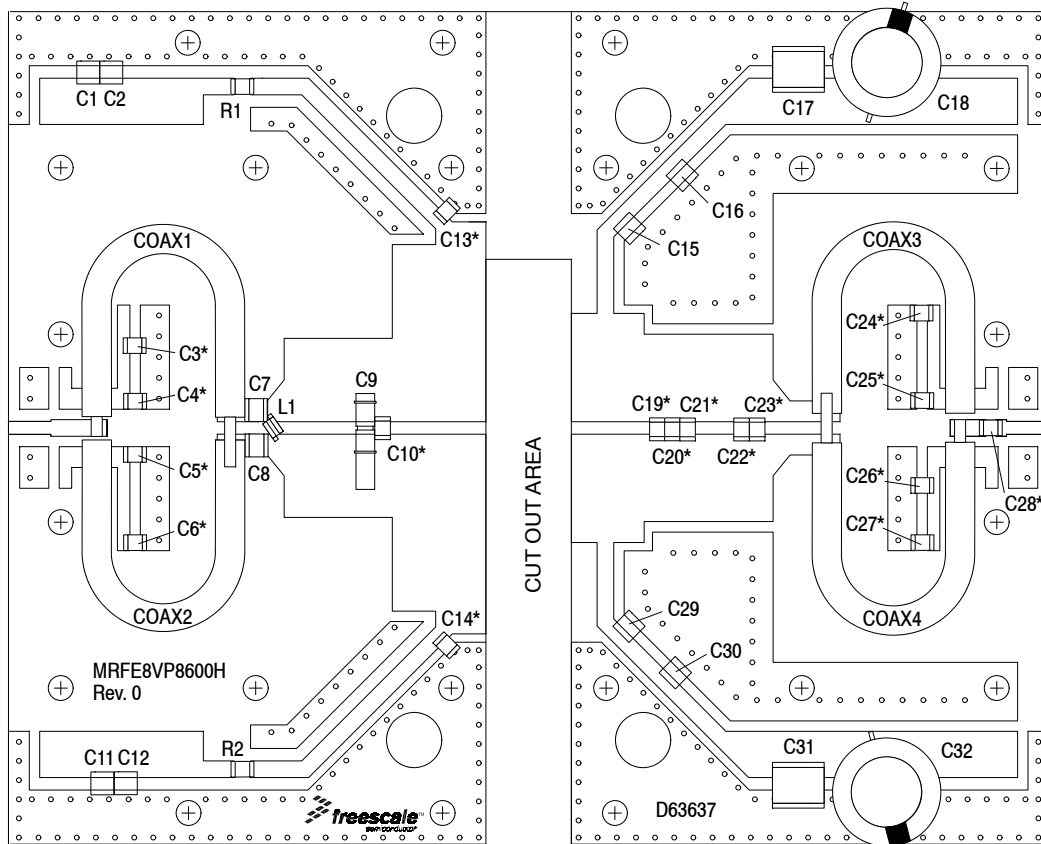

*C3, C4, C5, C6, C10, C13, C14, C19, C20, C21, C22, C23, C24, C25, C26, C27, and C28 are mounted vertically.

Figure 2. MRFE8VP8600H Test Circuit Component Layout — 860 MHz, DVB-T (8k OFDM)

Table 6. MRFE8VP8600H Test Circuit Component Designations and Values — 860 MHz, DVB-T (8k OFDM)

| Part | Description | Part Number | Manufacturer |
|-------------------------|---|----------------------|---------------------|
| C1, C11 | 10 μ F Chip Capacitors | GRM32ER61H106KA12L | Murata |
| C2, C12 | 2.2 μ F Chip Capacitors | C3225X7R1H225K250AB | TDK |
| C3, C4, C5, C6 | 30 pF Chip Capacitors | ATC100B300JT500XT | ATC |
| C7, C8 | 24 pF Chip Capacitors | ATC100B240JT500XT | ATC |
| C9 | 0.8–8.0 pF Variable Capacitor | 27291SL | Johanson Components |
| C10 | 12 pF Chip Capacitor | ATC100B120JT500XT | ATC |
| C13, C14 | 8.2 pF Chip Capacitors | ATC100B8R2CT500XT | ATC |
| C15, C29 | 2.2 μ F Chip Capacitors | C3225X7R2A225K230AB | TDK |
| C16, C25, C26, C28, C30 | 100 pF Chip Capacitors | ATC100B101JT500XT | ATC |
| C17, C31 | 4.7 μ F Chip Capacitors | C575X7R2A475K230KA | TDK |
| C18, C32 | 470 μ F, 63 V Electrolytic Capacitors | MCGPR63V477M13X26-RH | Multicomp |
| C19 | 7.5 pF Chip Capacitor | ATC100B7R5CT500XT | ATC |
| C20 | 3.3 pF Chip Capacitor | ATC100B3R3CT500XT | ATC |
| C21 | 3.0 pF Chip Capacitor | ATC100B3R0BT500XT | ATC |
| C22 | 3.9 pF Chip Capacitor | ATC100B3R9CT500XT | ATC |
| C23 | 5.1 pF Chip Capacitor | ATC100B5R1CT500XT | ATC |
| C24, C27 | 1000 pF Chip Capacitors | ATC100B102JT50XT | ATC |
| Coax1, 2 | 25 Ω Semi Rigid Coax, 2.0" Shield Length | UT-141C-25 | Micro-Coax |
| Coax3, 4 | 25 Ω Semi Rigid Coax, 2.2" Shield Length | UT-141C-25 | Micro-Coax |
| L1 | 2.5 nH, 1 Turn Inductor | A01TKLC | Coilcraft |
| R1, R2 | 10 Ω , 1/4 W Chip Resistors | CRCW120610R0JNEA | Vishay |
| PCB | Rogers RO4350B, 0.030", $\epsilon_r = 3.66$ | D63637 | MTL |

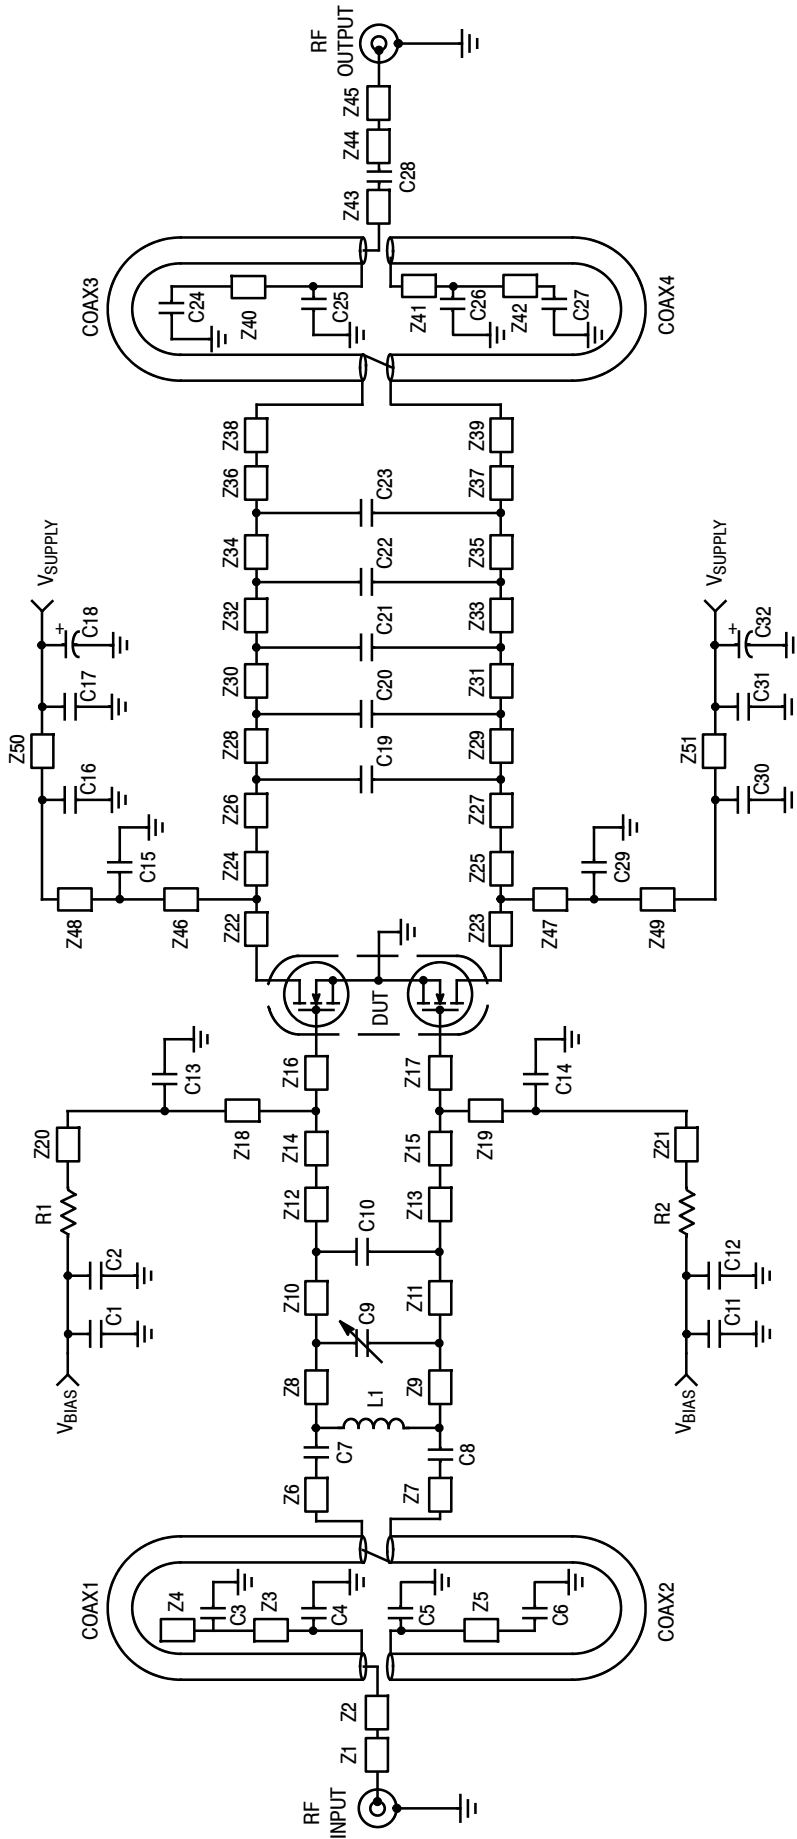


Figure 3. MRFE8VP8600H Test Circuit Schematic — 860 MHz DVB-T (8k OFDM)

Table 7. MRFE8VP8600H Test Circuit Schematic — 860 MHz DVB-T (8k OFDM)

| Microstrip | Description | Microstrip | Description | Microstrip | Description |
|------------|----------------------------|------------|----------------------------|------------|----------------------------|
| Z1 | 0.204" x 0.062" Microstrip | Z18, Z19 | 0.115" x 0.080" Microstrip | Z38, Z39 | 0.211" x 0.100" Microstrip |
| Z2 | 0.245" x 0.080" Microstrip | Z20*, Z21* | 1.026" x 0.080" Microstrip | Z40 | 0.389" x 0.060" Microstrip |
| Z3, Z4 | 0.220" x 0.060" Microstrip | Z22, Z23 | 0.164" x 0.520" Microstrip | Z41 | 0.155" x 0.060" Microstrip |
| Z5 | 0.410" x 0.062" Microstrip | Z24, Z25 | 0.186" x 0.520" Microstrip | Z42 | 0.280" x 0.060" Microstrip |
| Z6, Z7 | 0.019" x 0.100" Microstrip | Z26, Z27 | 0.015" x 0.420" Microstrip | Z43 | 0.070" x 0.080" Microstrip |
| Z8, Z9 | 0.341" x 0.400" Microstrip | Z28, Z29 | 0.072" x 0.420" Microstrip | Z44 | 0.018" x 0.080" Microstrip |
| Z10, Z11 | 0.083" x 0.400" Microstrip | Z30, Z31 | 0.072" x 0.420" Microstrip | Z45 | 0.204" x 0.062" Microstrip |
| Z12, Z13 | 0.065" x 0.400" Microstrip | Z32, Z33 | 0.275" x 0.420" Microstrip | Z46, Z47 | 0.358" x 0.080" Microstrip |
| Z14, Z15 | 0.208" x 0.850" Microstrip | Z34, Z35 | 0.072" x 0.420" Microstrip | Z48*, Z49* | 0.297" x 0.080" Microstrip |
| Z16, Z17 | 0.242" x 0.960" Microstrip | Z36, Z37 | 0.074" x 0.420" Microstrip | Z50, Z51 | 0.371" x 0.080" Microstrip |

*Line length includes microstrip bends

TYPICAL CHARACTERISTICS — 860 MHz

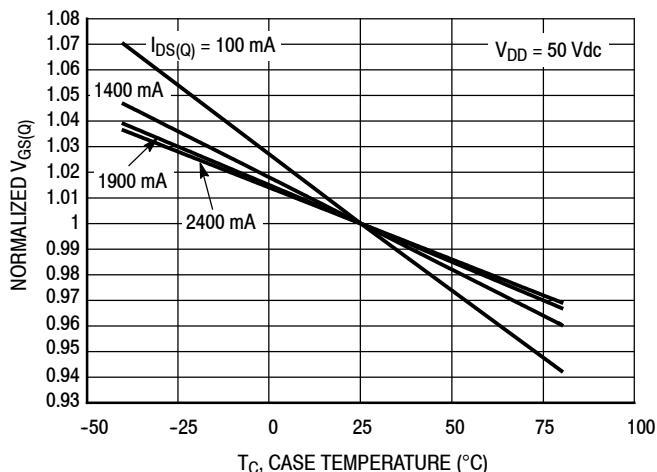


Figure 4. Normalized V_{GS} versus Quiescent Current and Case Temperature


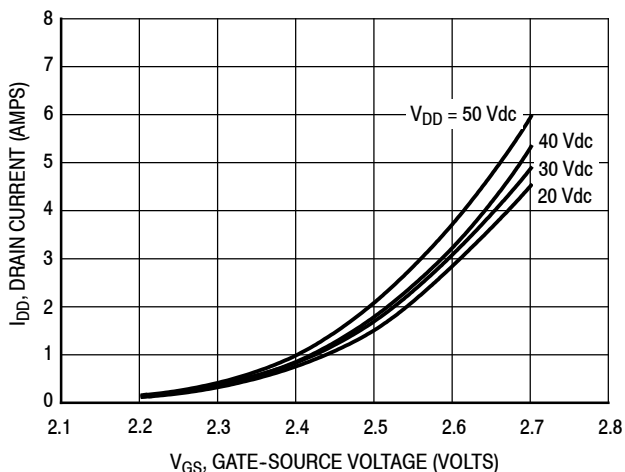


Figure 5. Drain Current versus Gate-Source Voltage

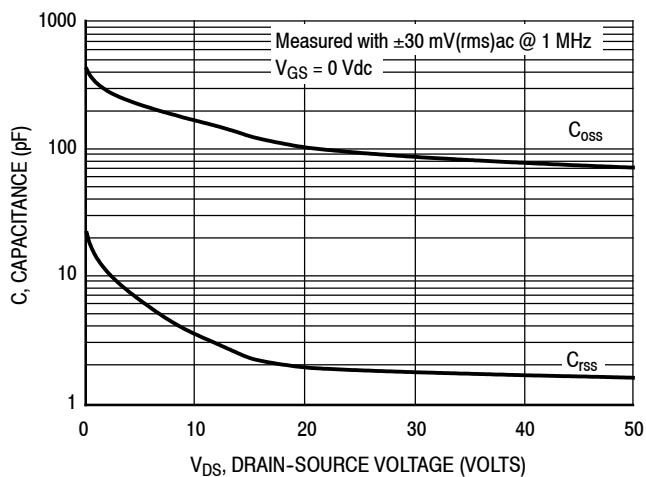

Note: Each side of device measured separately.

Figure 6. Capacitance versus Drain-Source Voltage

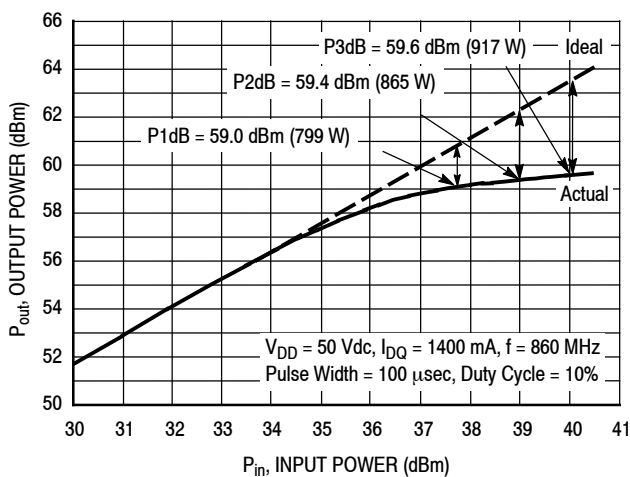


Figure 7. Pulse CW Output Power versus Input Power

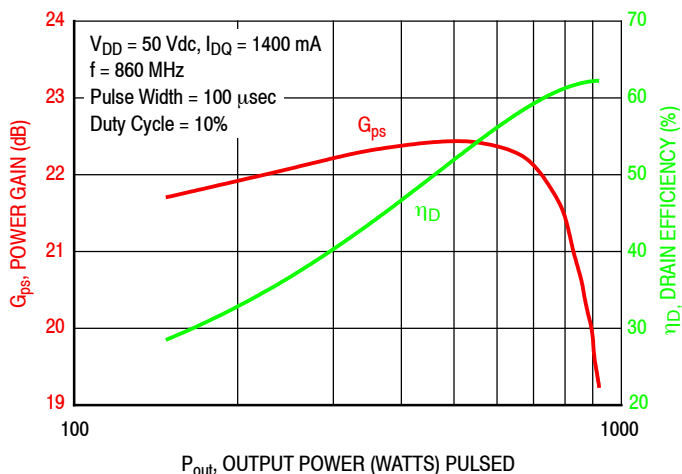


Figure 8. Pulse Power Gain and Drain Efficiency versus Output Power

TYPICAL CHARACTERISTICS — DVB-T (8k OFDM)

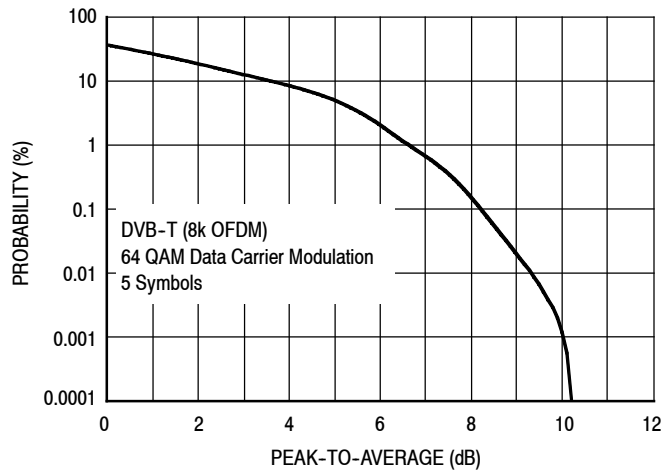


Figure 9. Source Peak-to-Average DVB-T (8k OFDM)


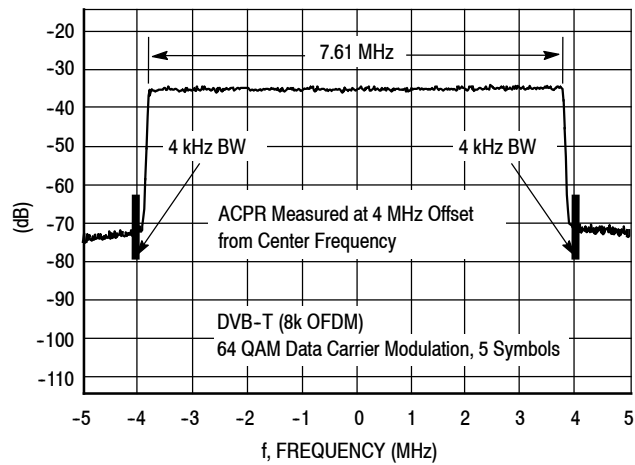


Figure 10. DVB-T (8k OFDM) Spectrum

TYPICAL CHARACTERISTICS

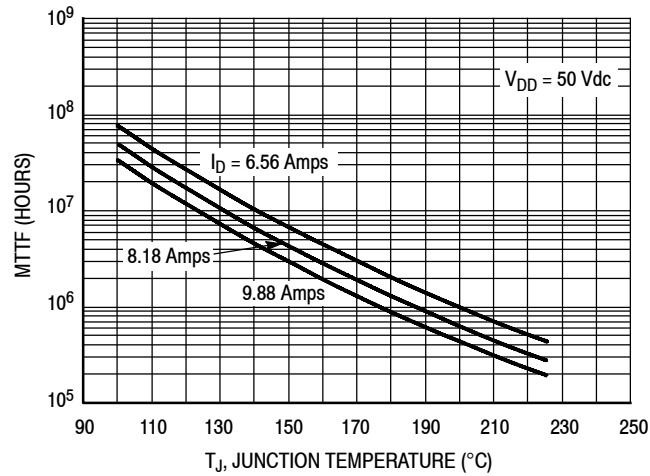

Note: MTTF value represents the total cumulative operating time under indicated test conditions.

MTTF calculator available at <http://www.nxp.com/RF/calculators>.

Figure 11. MTTF versus Junction Temperature - CW

| f MHz | Z _{source} Ω | Z _{load} Ω |
|----------|--------------------------|------------------------|
| 860 | 0.85 - j0.90 | 4.0 + j1.1 |

Z_{source} = Test circuit impedance as measured from gate to gate, balanced configuration.

Z_{load} = Test circuit impedance as measured from drain to drain, balanced configuration.


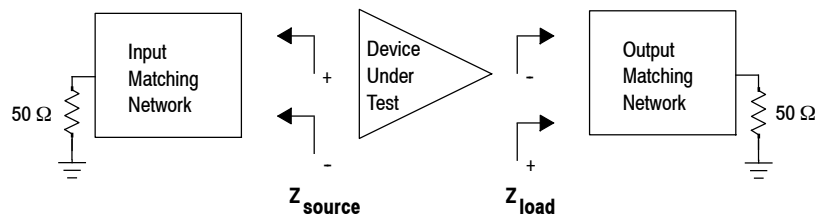


Figure 12. Series Equivalent Source and Load Impedance

PACKAGE DIMENSIONS

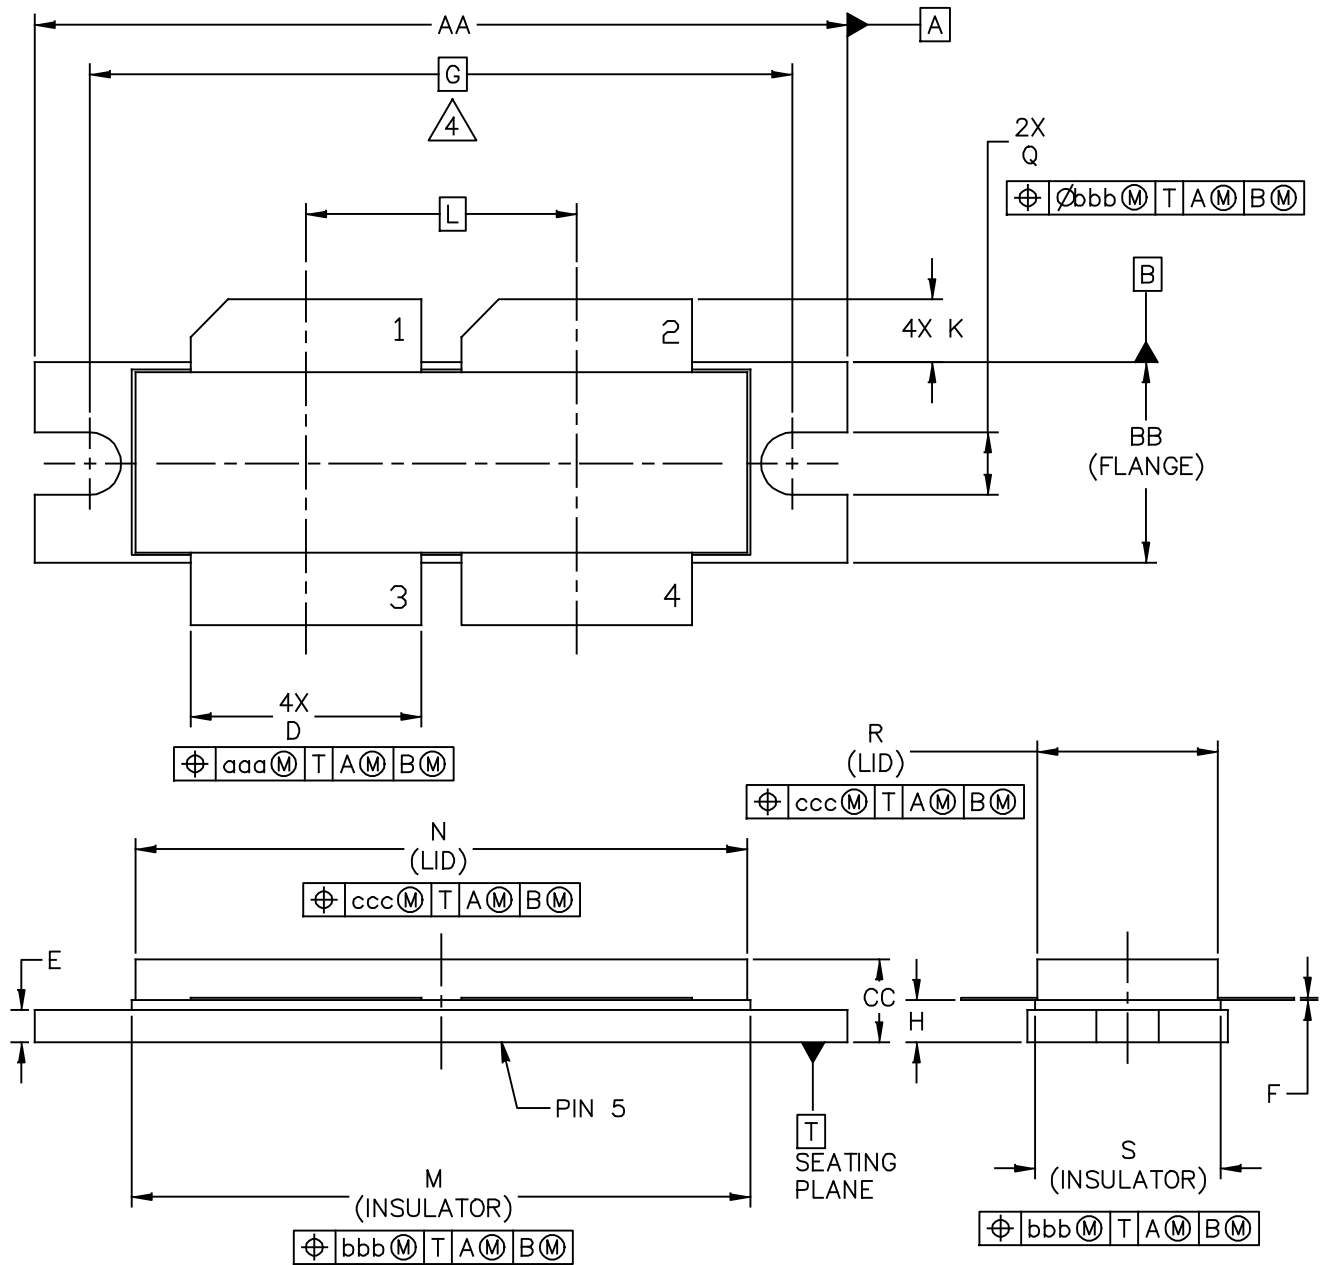

| | | | | | | | | |
|---|---|----------------------------|--------------------------|--------|---------------------|--|-----------|-------------|
| © NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED | MECHANICAL OUTLINE | PRINT VERSION NOT TO SCALE | | | | | | |
| TITLE: <div style="text-align: center; font-size: 1.2em;">NI-1230-4H</div> | <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">DOCUMENT NO: 98ASB16977C</td> <td style="width: 50%;">REV: G</td> </tr> <tr> <td colspan="2">STANDARD: NON-JEDEC</td> </tr> <tr> <td>SOT1787-1</td> <td style="text-align: right;">03 MAR 2016</td> </tr> </table> | | DOCUMENT NO: 98ASB16977C | REV: G | STANDARD: NON-JEDEC | | SOT1787-1 | 03 MAR 2016 |
| DOCUMENT NO: 98ASB16977C | REV: G | | | | | | | |
| STANDARD: NON-JEDEC | | | | | | | | |
| SOT1787-1 | 03 MAR 2016 | | | | | | | |


MRFE8VP8600H MRFE8VP8600HS

NOTES:

1. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH
3. DIMENSION H IS MEASURED .030 INCH (0.762 MM) AWAY FROM PACKAGE BODY.

4.  RECOMMENDED BOLT CENTER DIMENSION OF 1.52 INCH (38.61 MM) BASED ON M3 SCREW.

| DIM | INCH | | MILLIMETER | | DIM | INCH | | MILLIMETER | |
|--|-----------|-------|--------------------|-------|--------------------------------------|----------------------------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX | | MIN | MAX | MIN | MAX |
| AA | 1.615 | 1.625 | 41.02 | 41.28 | N | 1.218 | 1.242 | 30.94 | 31.55 |
| BB | .395 | .405 | 10.03 | 10.29 | Q | .120 | .130 | 3.05 | 3.30 |
| CC | .170 | .190 | 4.32 | 4.83 | R | .355 | .365 | 9.02 | 9.27 |
| D | .455 | .465 | 11.56 | 11.81 | S | .365 | .375 | 9.27 | 9.53 |
| E | .062 | .066 | 1.57 | 1.68 | | | | | |
| F | .004 | .007 | 0.10 | 0.18 | | | | | |
| G | 1.400 BSC | | 35.56 BSC | | aaa | .013 | | 0.33 | |
| H | .082 | .090 | 2.08 | 2.29 | bbb | .010 | | 0.25 | |
| K | .117 | .137 | 2.97 | 3.48 | ccc | .020 | | 0.51 | |
| L | .540 BSC | | 13.72 BSC | | | | | | |
| M | 1.219 | 1.241 | 30.96 | 31.52 | | | | | |
| © NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED | | | MECHANICAL OUTLINE | | | PRINT VERSION NOT TO SCALE | | | |
| TITLE: NI-1230-4H | | | | | DOCUMENT NO: 98ASB16977C REV: G | | | | |
| | | | | | STANDARD: NON-JEDEC | | | | |
| | | | | | SOT1787-1 | | | 03 MAR 2016 | |

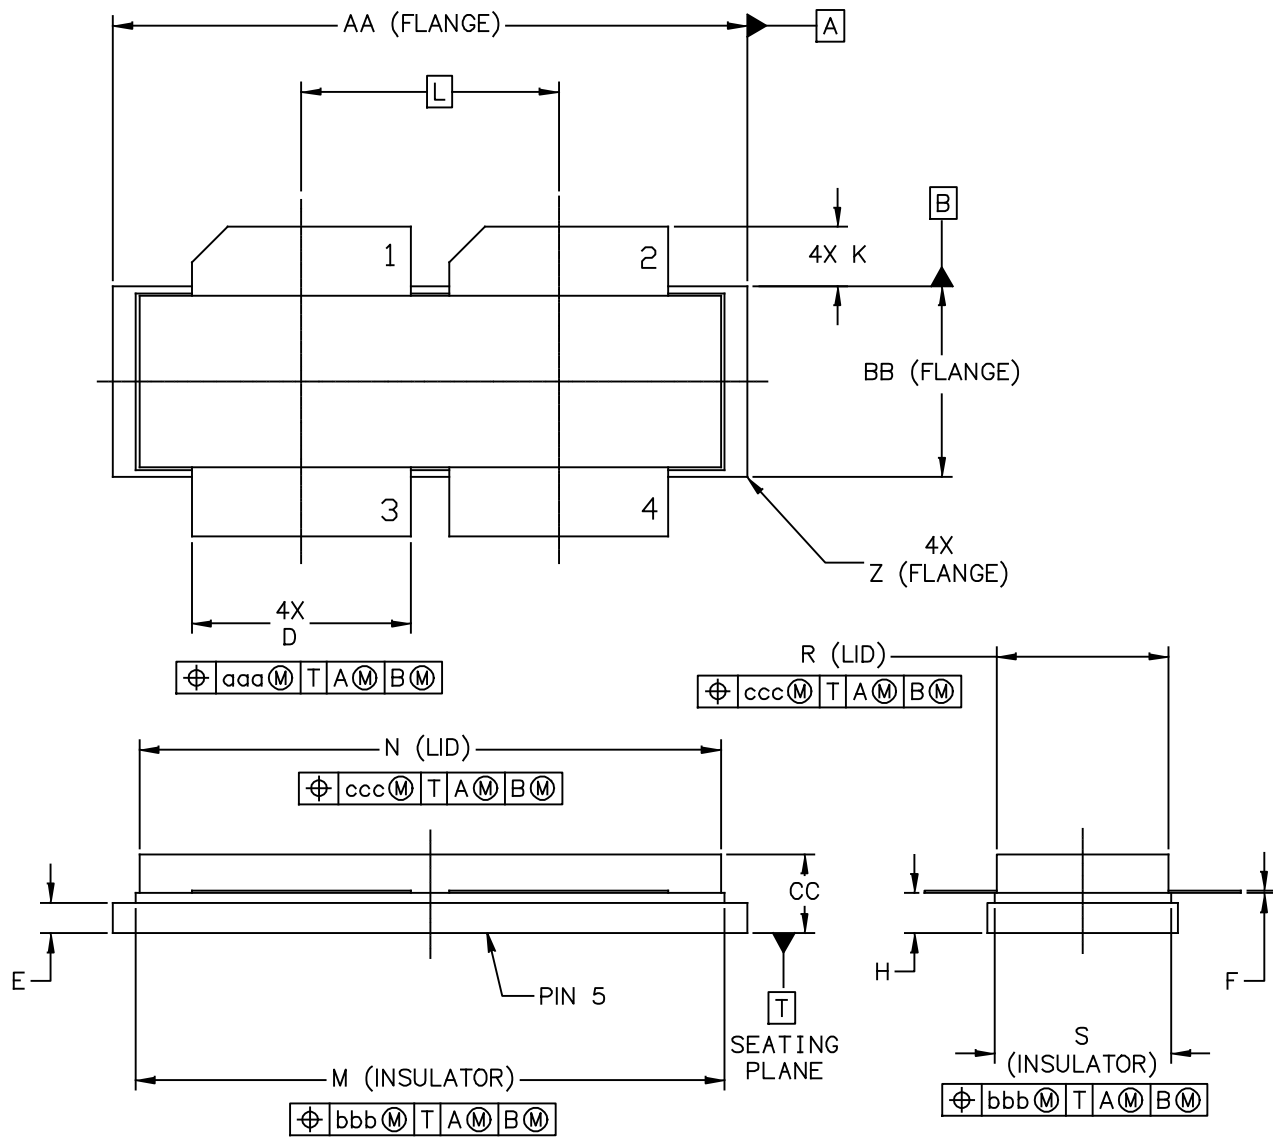

| | | |
|---|--|----------------------------|
| © NXP SEMICONDUCTORS N. V. ALL RIGHTS RESERVED | MECHANICAL OUTLINE | PRINT VERSION NOT TO SCALE |
| TITLE: NI-1230-4S | DOCUMENT NO: 98ARB18247C STANDARD: NON-JEDEC SOT1829-1 | REV: H 19 FEB 2016 |

NOTES:

1. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH
3. DIMENSION H IS MEASURED .030 INCH (0.762 MM) AWAY FROM PACKAGE BODY

| DIM | INCHES | | MILLIMETERS | | DIM | INCHES | | MILLIMETERS | |
|--|----------|-------|--------------------|-------|--------------------------|----------------------------|-------------|-------------|-------|
| | MIN | MAX | MIN | MAX | | MIN | MAX | MIN | MAX |
| AA | 1.265 | 1.275 | 32.13 | 32.39 | R | .355 | .365 | 9.02 | 9.27 |
| BB | .395 | .405 | 10.03 | 10.29 | S | .365 | .375 | 9.27 | 9.53 |
| CC | .170 | .190 | 4.32 | 4.83 | Z | R.000 | R.040 | R0.00 | R1.02 |
| D | .455 | .465 | 11.56 | 11.81 | | | | | |
| E | .062 | .066 | 1.57 | 1.68 | aaa | .013 | | 0.33 | |
| F | .004 | .007 | 0.10 | 0.18 | bbb | .010 | | 0.25 | |
| H | .082 | .090 | 2.08 | 2.29 | ccc | .020 | | 0.51 | |
| K | .117 | .137 | 2.97 | 3.48 | | | | | |
| L | .540 BSC | | 13.72 BSC | | | | | | |
| M | 1.219 | 1.241 | 30.96 | 31.52 | | | | | |
| N | 1.218 | 1.242 | 30.94 | 31.55 | | | | | |
| © NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED | | | MECHANICAL OUTLINE | | | PRINT VERSION NOT TO SCALE | | | |
| TITLE: NI-1230-4S | | | | | DOCUMENT NO: 98ARB18247C | | REV: H | | |
| | | | | | STANDARD: NON-JEDEC | | | | |
| | | | | | SOT1829-1 | | 19 FEB 2016 | | |

PRODUCT DOCUMENTATION, SOFTWARE AND TOOLS

Refer to the following resources to aid your design process.

Application Notes

- AN1908: Solder Reflow Attach Method for High Power RF Devices in Air Cavity Packages
- AN1955: Thermal Measurement Methodology of RF Power Amplifiers

Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

Software

- Electromigration MTTF Calculator
- RF High Power Model
- .s2p File

Development Tools

- Printed Circuit Boards

To Download Resources Specific to a Given Part Number:

1. Go to <http://www.nxp.com/RF>
2. Search by part number
3. Click part number link
4. Choose the desired resource from the drop down menu

REVISION HISTORY

The following table summarizes revisions to this document.

| Revision | Date | Description |
|----------|-----------|--|
| 0 | July 2015 | <ul style="list-style-type: none">• Initial release of data sheet |
| 1 | Aug. 2017 | <ul style="list-style-type: none">• Added part number MRFE8VP8600HS, pp. 1, 3• Added NI-1230S-4S package isometric, p. 1, and Mechanical Outline, pp. 11-12 |

How to Reach Us:

Home Page:
nxp.com

Web Support:
nxp.com/support

Information in this document is provided solely to enable system and software implementers to use NXP products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document. NXP reserves the right to make changes without further notice to any products herein.

NXP makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does NXP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in NXP data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. NXP does not convey any license under its patent rights nor the rights of others. NXP sells products pursuant to standard terms and conditions of sale, which can be found at the following address: nxp.com/SalesTermsandConditions.

NXP, the NXP logo, Freescale, and the Freescale logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners.
© 2017 NXP B.V.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF MOSFET Transistors](#) category:

Click to view products by [NXP](#) manufacturer:

Other Similar products are found below :

[MRF166W](#) [MHT1006NT1](#) [FH2164](#) [MRFE8VP8600HR5](#) [BLF245](#) [BLF278](#) [ARF1511](#) [ARF465BG](#) [BF 2030 E6814](#) [BLF861A](#) [3SK263-5-TG-E](#) [VRF154FL](#) [MRF6S20010GNR1](#) [DU1215S](#) [DU28200M](#) [VRF150MP](#) [MMRF1015NR1](#) [MRF154](#) [MRF175LU](#) [MRF6S20010GNR1](#) [UF28100M](#) [MW6S010GNR1](#) [MW6S010GNR1](#) [DU2820S](#) [SD2943W](#) [SD2932BW](#) [SD2941-10W](#) [MRF24301HR5](#) [ARF469AG](#) [ARF463BP1G](#) [MMRF1019NR4](#) [MHT1008NT1](#) [MMRF1014NT1](#) [MRF426](#) [MRF422](#) [BLW96](#) [ARF468AG](#) [VRF161MP](#) [ARF468BG](#) [MRFE6VP61K25NR6](#) [MRFE6VP5300NR1](#) [A2T27S020NR1](#) [UF2840P](#) [MMRF1304NR1](#) [MRFE6S9060GNR1](#) [MMRF1008GHR5](#) [A2T27S007NT1](#) [AFT09MP055NR1](#) [DU2860U](#) [MHT1803A](#)