NCX2220

Low voltage comparator

Rev. 4 — 27 June 2012

Product data sheet

1. General description

The NCX2220 provides a dual low voltage low power comparator.

The NCX2220 has a very low supply current of 5 μ A per comparator and is guaranteed to operate at a low voltage of 1.3 V. It is fully operational up to 5.5 V which makes this device convenient for use in both 3.0 V and 5.0 V systems.

2. Features and benefits

- Wide supply voltage range from 1.3 V to 5.5 V (functional operating range)
- Rail-to-rail input/output performance
- Very low supply current of 5 μA (typical) per comparator
- Very low-power consumption
- No phase inversion with overdriven input signals
- Internal hysteresis
- Propagation delay of 0.8 μs (typical)
- ESD protection:
 - ♦ HBM JESD22-A114F Class 3A. Exceeds 2000 V
 - ◆ CDM JESD22-C101E exceeds 1000 V
- Multiple package options
- Specified from -40 °C to +85 °C

3. Applications

- Cellular telephones
- Alarm and security systems
- Personal Digital assistants



Low voltage comparator

4. Ordering information

Table 1. Ordering information

Type number	Package						
	Temperature range	Name	Description	Version			
NCX2220DP	–40 °C to +85 °C	TSSOP8	plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm	SOT505-2			
NCX2220GU	–40 °C to +85 °C	HXSON8	plastic, thermal enhanced extremely thin small outline package; no leads; 8 terminals; body 1.35 \times 1.7 \times 0.5 mm	SOT972-2 ^[1]			
NCX2220GT	–40 °C to +85 °C	XSON8	plastic extremely thin small outline package; no leads; 8 terminals; body 1 \times 1.95 \times 0.5 mm	SOT833-1			
NCX2220GF	–40 °C to +85 °C	XSON8	extremely thin small outline package; no leads; 8 terminals; body 1.35 \times 1 \times 0.5 mm	SOT1089			
NCX2220GM	–40 °C to +85 °C	XQFN8	plastic, extremely thin quad flat package; no leads; 8 terminals; body 1.6 \times 1.6 \times 0.5 mm	SOT902-2			

^[1] Lead pitch is 0.4 mm.


5. Marking

Table 2. Marking codes

Type number	Marking ^[1]
NCX2220DP	q2
NCX2220GU	q2
NCX2220GT	q2
NCX2220GF	q2
NCX2220GM	q2

^[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.


6. Functional diagram

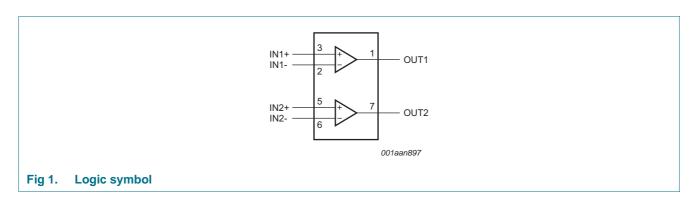


Low voltage comparator

7. Pinning information

7.1 Pinning

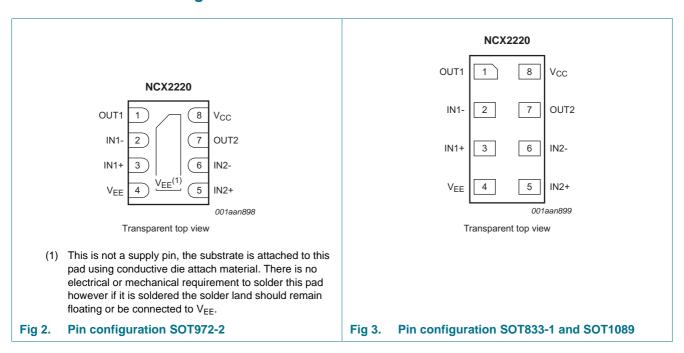

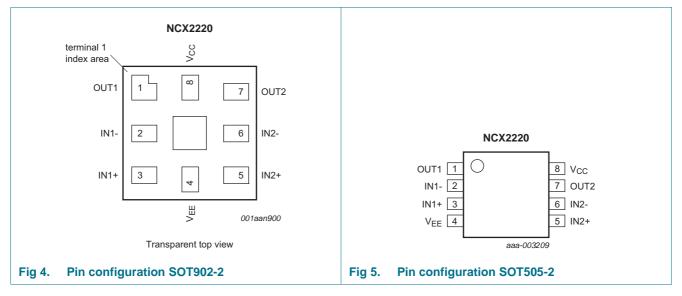

Low voltage comparator

7.2 Pin description

Table 3. Pin description

Symbol	Pin	Description
OUT1	1	comparator output 1
IN1-	2	comparator input 1 (negative)
IN1+	3	comparator input 1 (positive)
V _{EE}	4	supply voltage
IN2+	5	comparator input 2 (positive)
IN2-	6	comparator input 2 (negative)
OUT2	7	comparator output 2
V _{CC}	8	supply voltage

8. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to V_{EE}.

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-	7.0	V
V_{I}	input voltage	IN1-, IN1+, IN2-, IN2+ inputs	-0.5	$V_{CC} + 0.5$	V
t _{sc}	short circuit duration time		<u>[1]</u> -	indefinite	S
$T_{j(max)}$	maximum junction temperature		-	+150	°C
T _{stg}	storage temperature		-65	+150	°C
P _{tot}	total power dissipation	$T_{amb} = -40 ^{\circ}\text{C} \text{ to } +85 ^{\circ}\text{C}$	-	250	mW

^[1] The maximum total power dissipation must not be exceeded.

9. Recommended operating conditions

Table 5. Recommended operating conditions

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V _{CC} supply voltage		V _{CC} to V _{EE}				
		full spec operating range	1.6	-	5.5	V
		functional operating range	1.3	-	5.5	V
VI	input voltage		V_{EE}	-	V_{CC}	V
T _{amb}	ambient temperature		-40	-	+85	°C

Low voltage comparator

10. Static characteristics

Table 6. Static characteristics

At recommended operating conditions. $V_{CC} = 1.6 \text{ V}$ to 5.5 V, $V_{EE} = 0 \text{ V}$; $V_{CM} = 0.5 V_{CC}$ unless otherwise specified.

Parameter	Conditions		25 °C			-40 °C to +85 °C		Unit
			Min	Тур	Max	Min	Max	
hysteresis voltage			6	9	13	-	-	mV
	V _{CC} = 1.3 V		-	20	-	-	-	mV
offset input voltage		[1]	-30	0.5	+30	-30	+30	mV
	V _{CC} = 1.3 V	[1]	-	3	-	-	-	mV
HIGH-level output	$I_{O} = -0.5 \text{ mA}; V_{CC} = 1.3 \text{ V}$		-	1.24	-	-	-	V
voltage	$I_{O} = -0.5 \text{ mA}; V_{CC} = 1.6 \text{ V}$		-	1.55	-	1.35	-	V
	$I_{O} = -3 \text{ mA}; V_{CC} = 3.0 \text{ V}$		-	2.85	-	2.7	-	V
	$I_{O} = -5 \text{ mA}; V_{CC} = 5.5 \text{ V}$		-	5.33	-	5.2	-	V
LOW-level output	$I_{O} = 0.5 \text{ mA}; V_{CC} = 1.3 \text{ V}$		-	0.05	-	-	-	V
voltage	$I_O = 0.5 \text{ mA}; V_{CC} = 1.6 \text{ V}$		-	0.04	-	-	0.25	V
	$I_{O} = 3 \text{ mA}; V_{CC} = 3.0 \text{ V}$		-	0.14	-	-	0.3	V
	$I_{O} = 5 \text{ mA}; V_{CC} = 5.5 \text{ V}$		-	0.20	-	-	0.3	V
common-mode voltage	$V_{CC} = 1.3 \text{ V to } 5.5 \text{ V}$		-	V_{EE} to V_{CC}	-	-	-	V
output short-circuit current	$V_{CC} = 5.5 \text{ V}; V_O = V_{EE} \text{ or } V_{CC}$		-	68	-	-	-	mA
common-mode rejection ratio	$\Delta V_{CM} = V_{CC}$		-	70	-	-	-	dB
power supply rejection ratio	ΔV_{CC} = 1.95 V		45	80	-	-	-	dB
input bias current			-	1.0	-	-	-	рА
supply current	per comparator		-	5.0	-	-	7.0	μΑ
	hysteresis voltage offset input voltage HIGH-level output voltage LOW-level output voltage common-mode voltage output short-circuit current common-mode rejection ratio power supply rejection ratio input bias current	$\label{eq:hysteresis} \text{hysteresis voltage} \\ \hline \text{V}_{CC} = 1.3 \text{ V} \\ \hline \text{Offset input voltage} \\ \hline \text{V}_{CC} = 1.3 \text{ V} \\ \hline \text{HIGH-level output voltage} \\ \hline \text{V}_{CC} = 1.3 \text{ V} \\ \hline \text{I}_{O} = -0.5 \text{ mA; V}_{CC} = 1.3 \text{ V} \\ \hline \text{I}_{O} = -0.5 \text{ mA; V}_{CC} = 1.6 \text{ V} \\ \hline \text{I}_{O} = -3 \text{ mA; V}_{CC} = 3.0 \text{ V} \\ \hline \text{I}_{O} = -5 \text{ mA; V}_{CC} = 5.5 \text{ V} \\ \hline \text{LOW-level output voltage} \\ \hline \text{I}_{O} = 0.5 \text{ mA; V}_{CC} = 1.3 \text{ V} \\ \hline \text{I}_{O} = 0.5 \text{ mA; V}_{CC} = 1.6 \text{ V} \\ \hline \text{I}_{O} = 3 \text{ mA; V}_{CC} = 3.0 \text{ V} \\ \hline \text{I}_{O} = 3 \text{ mA; V}_{CC} = 5.5 \text{ V} \\ \hline \text{common-mode voltage} \\ \hline \text{output short-circuit current} \\ \hline \text{common-mode rejection ratio} \\ \hline \text{power supply rejection ratio} \\ \hline \text{input bias current} \\ \hline \hline \end{tabular} \text{ΔV}_{CC} = 1.95 \text{ V} \\ \hline \end{tabular}$	$\label{eq:bounds} \text{hysteresis voltage} \\ \hline \text{V}_{CC} = 1.3 \text{ V} \\ \hline \text{offset input voltage} \\ \hline \text{V}_{CC} = 1.3 \text{ V} \\ \hline \text{HIGH-level output voltage} \\ \hline \text{V}_{CC} = 1.3 \text{ V} \\ \hline \text{I}_{O} = -0.5 \text{ mA; V}_{CC} = 1.3 \text{ V} \\ \hline \text{I}_{O} = -0.5 \text{ mA; V}_{CC} = 1.6 \text{ V} \\ \hline \text{I}_{O} = -3 \text{ mA; V}_{CC} = 3.0 \text{ V} \\ \hline \text{I}_{O} = -5 \text{ mA; V}_{CC} = 5.5 \text{ V} \\ \hline \text{LOW-level output voltage} \\ \hline \text{I}_{O} = 0.5 \text{ mA; V}_{CC} = 1.3 \text{ V} \\ \hline \text{I}_{O} = 0.5 \text{ mA; V}_{CC} = 1.6 \text{ V} \\ \hline \text{I}_{O} = 3 \text{ mA; V}_{CC} = 1.6 \text{ V} \\ \hline \text{I}_{O} = 3 \text{ mA; V}_{CC} = 3.0 \text{ V} \\ \hline \text{I}_{O} = 5 \text{ mA; V}_{CC} = 5.5 \text{ V} \\ \hline \text{common-mode voltage} \\ \hline \text{output short-circuit current} \\ \hline \text{common-mode rejection ratio} \\ \hline \text{power supply rejection ratio} \\ \hline \text{power supply rejection ratio} \\ \hline \text{input bias current} \\ \hline \end{tabular}$	$\begin{tabular}{ c c c c c } hysteresis voltage & & & & & & & & & & & & & & & & & & &$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	$\begin{array}{c c c c c c c c c c c c c c c c c c c $	Min Typ Max Min Max hysteresis voltage 6 9 13 - - offset input voltage 11 -30 0.5 +30 -30 +30 Offset input voltage 11 -30 0.5 +30 -30 +30 HIGH-level output voltage 10 = -0.5 mA; V _{CC} = 1.3 V - 1.24 - - - 10 = -0.5 mA; V _{CC} = 1.6 V - 1.55 - 1.35 - - 10 = -3 mA; V _{CC} = 3.0 V - 2.85 - 2.7 - - 10 = -5 mA; V _{CC} = 5.5 V - 5.33 - 5.2 -

^[1] Differential input switching level is guaranteed at the minimum or maximum offset voltage, minus or plus half the maximum hysteresis voltage.

11. Dynamic characteristics

Table 7. Dynamic characteristics

Voltages are referenced to V_{EE} (V_{EE} = 0 V); V_{CC} = 1.6 V to 5.5 V; V_{CM} = 0.5 V_{CC} unless otherwise specified.

Symbol	Parameter	Conditions		25 °C			Unit
				Min	Тур	Max	
t_{pd}	propagation delay	20 mV overdrive; $C_L = 15 pF$	<u>[1]</u>	-	0.8	-	μs
t _{THL}	HIGH to LOW output transition time	$V_{CC} = 5.5 \text{ V}; C_L = 50 \text{ pF}$	[2]	-	10	-	ns
t _{TLH}	LOW to HIGH output transition time	$V_{CC} = 5.5 \text{ V}; C_L = 50 \text{ pF}$	<u>[2]</u>	-	10	-	ns

^[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

NCX2220

All information provided in this document is subject to legal disclaimers.

^[2] Input signal: 1 kHz, squarewave signal with 10 ns edge rate.

Low voltage comparator

12. Graphs



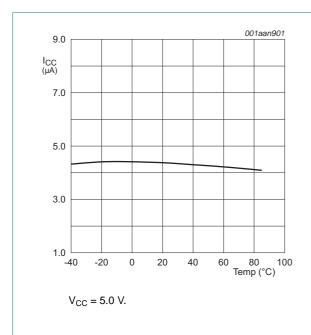


Fig 6. Supply current versus temperature (per comparator)

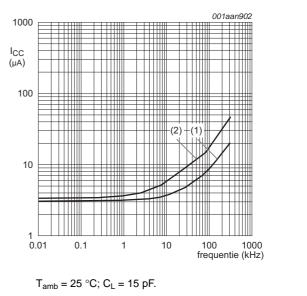


- (1) $V_{CC} = 2.7 \text{ V}.$
- (2) $V_{CC} = 5.0 \text{ V}.$

Fig 7. Supply current versus output transition frequency (per comparator)

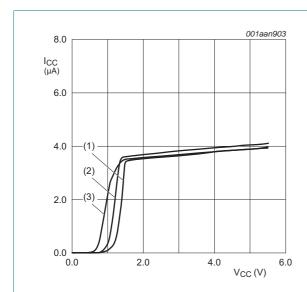

- (1) $T_{amb} = -40 \, ^{\circ}C$.
- (2) $T_{amb} = 25 \, ^{\circ}C$.
- (3) $T_{amb} = 85 \, ^{\circ}C$.

Fig 8. Supply current versus supply voltage (per comparator)

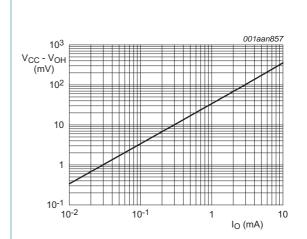

 $T_{amb} = 25 \, ^{\circ}C.$ $V_{CC} = 5.0 \, V.$

Fig 9. HIGH-level output voltage versus output current

Low voltage comparator

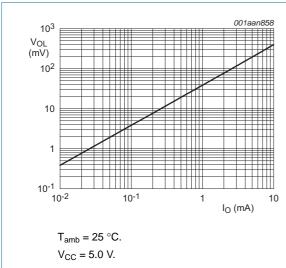


Fig 10. LOW-level output voltage versus output current

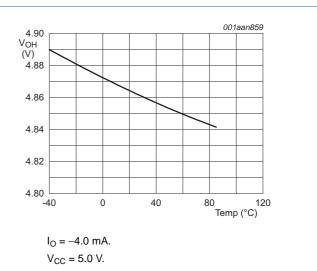


Fig 11. HIGH-level output voltage versus temperature


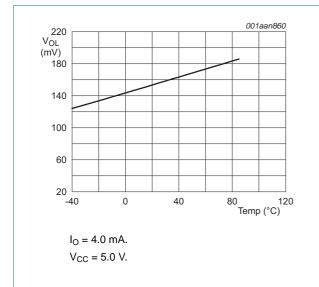


Fig 12. LOW-level output voltage versus temperature

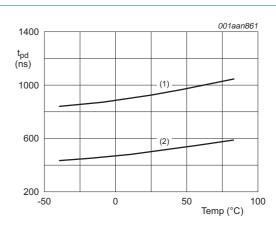


 $V_{CC} = 5.0 \text{ V}$; input overdrive = 50 mV.

- (1) t_{PLH}.
- (2) t_{PHL}.

Fig 13. Propagation delay versus temperature

Product data sheet

Low voltage comparator

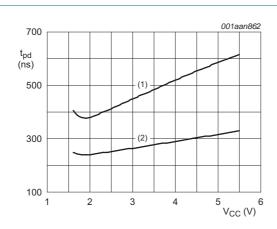

 T_{amb} = 25 °C; input overdrive = 100 mV.

- (1) t_{PLH}.
- (2) t_{PHL}.

Fig 14. Propagation delay versus supply voltage.

Low voltage comparator


13. Application information

13.1 Operating description

The NCX2220 is a dual low voltage low power comparator. This device is designed for rail-to-rail input and output performance. This device consumes only 5 μ A per comparator of supply current while achieving a typical propagation delay of 0.8 μ s at a 20 mV input overdrive. This comparator is guaranteed to operate at a low voltage of 1.3 V up to 5.5 V. The common-mode input voltage range extends 0.1 V beyond the upper and lower rail without phase inversion or other adverse effects. This device has a typical internal hysteresis of 9.0 mV. This allows for greater noise immunity and clean output switching.

13.2 Output stage

The NCX2220 has a complementary P and N Channel output stage that has capability of driving a rail-to-rail output swing with a load ranging up to 5.0 mA. It is designed such that shoot-through current is minimized while switching. This feature eliminates the need for bypass capacitors under most circumstances. See <u>Figure 15</u>

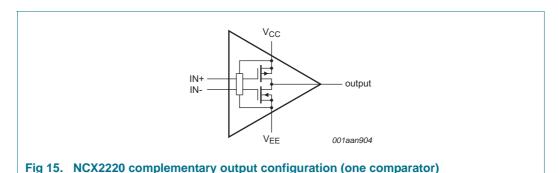

Low voltage comparator

13.3 Schmitt trigger oscillator

Figure 16 shows the NCX2220 configured as a Schmitt trigger oscillator.


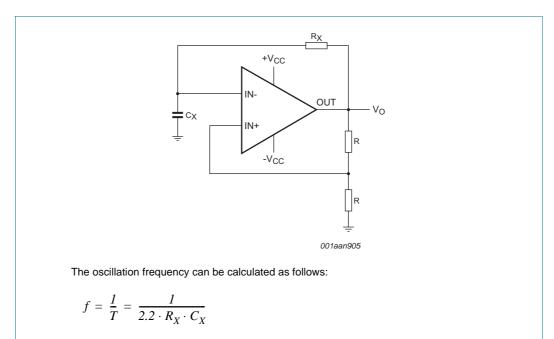


Fig 16. Schmitt trigger oscillator

13.4 Zero-crossing detector


Figure 17 shows the NCX2220 configured as a zero-crossing detector.

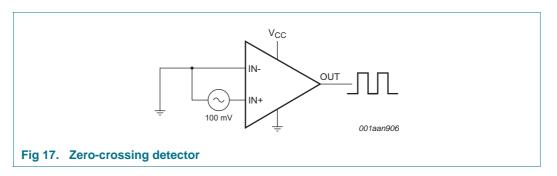

Low voltage comparator


13.5 One-shot multivibrator

Figure 18 shows the NCX2220 configured as a one-shot multivibrator.

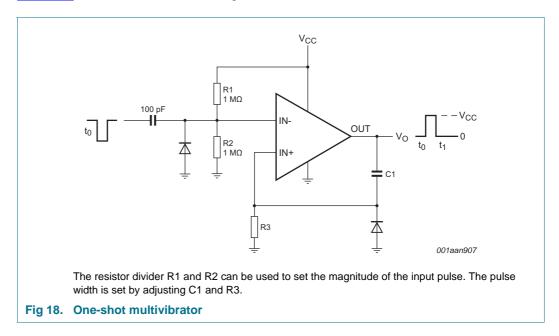

13.6 Logic level translator

Figure 19 shows the NCX2220 configured as a logic level translator.

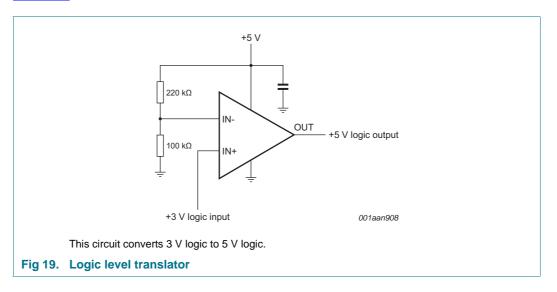

Low voltage comparator

14. Package outline

TSSOP8: plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm SOT505-2

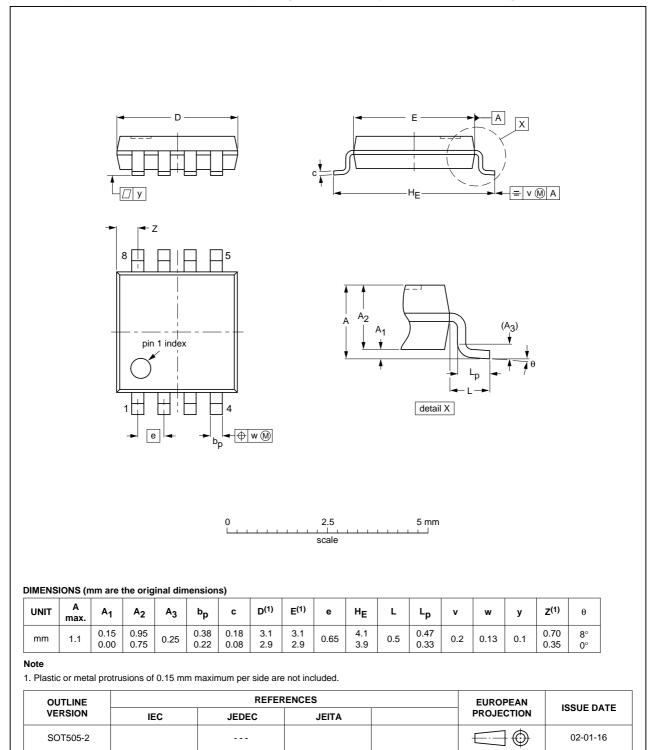


Fig 20. Package outline SOT505-2 (TSSOP8)

XX2220 All information provided in this document is subject to legal disclaimers.

Low voltage comparator

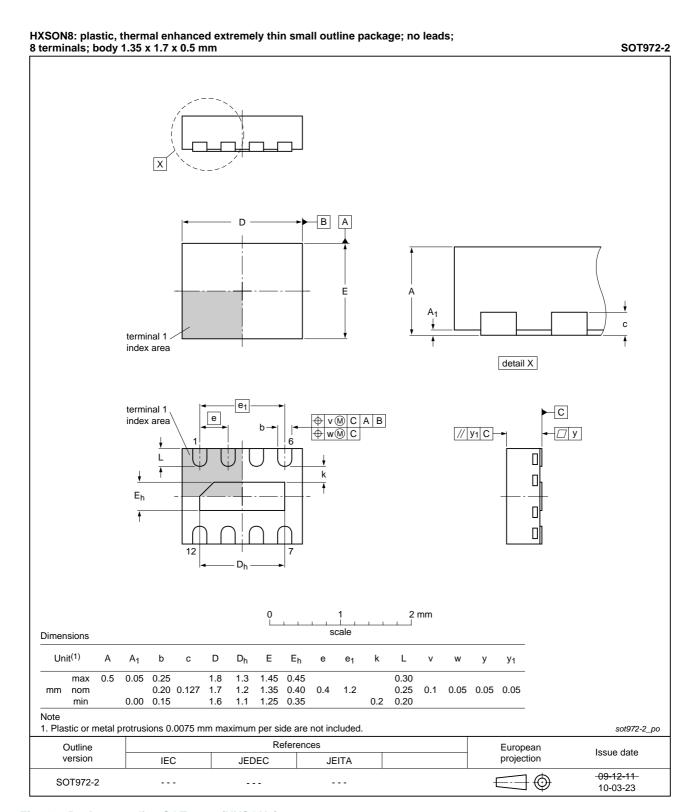


Fig 21. Package outline SOT972-2 (HXSON8)

NCX2220 All information provided in this document is subject to legal disclaimers.

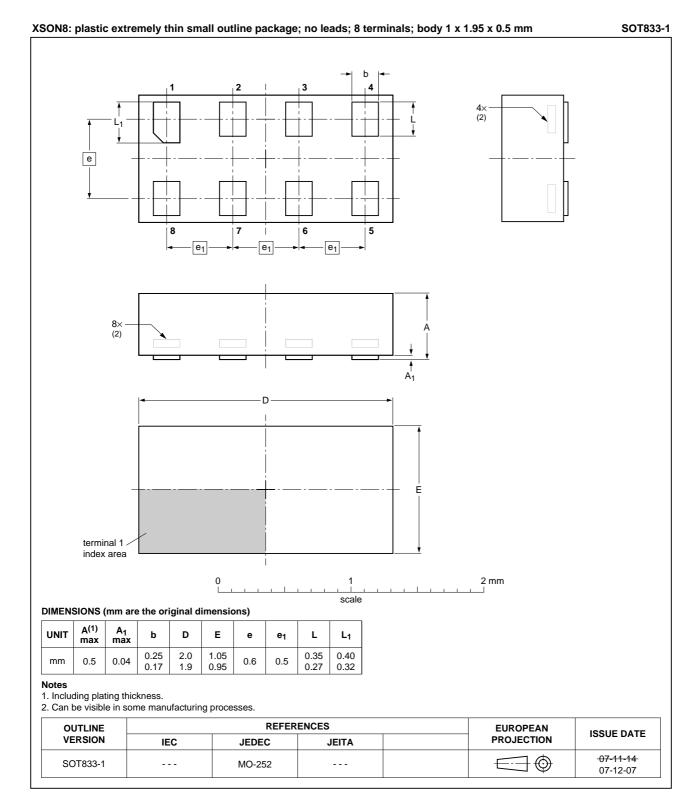


Fig 22. Package outline SOT833-1 (XSON8)

NCX2220 All information provided in this document is subject to legal disclaimers.

Low voltage comparator

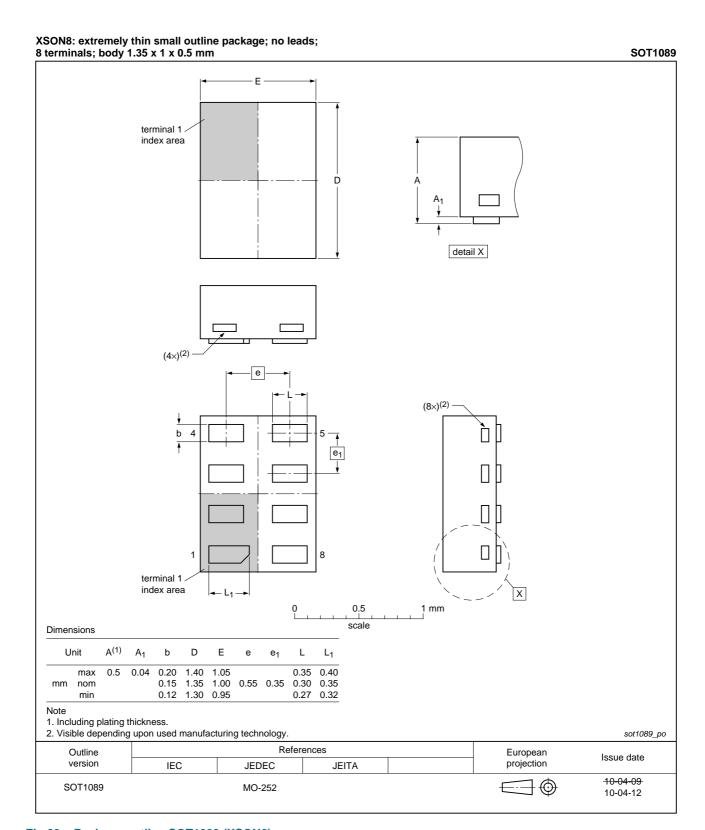


Fig 23. Package outline SOT1089 (XSON8)

X2220 All information provided in this document is subject to legal disclaimers.

Low voltage comparator

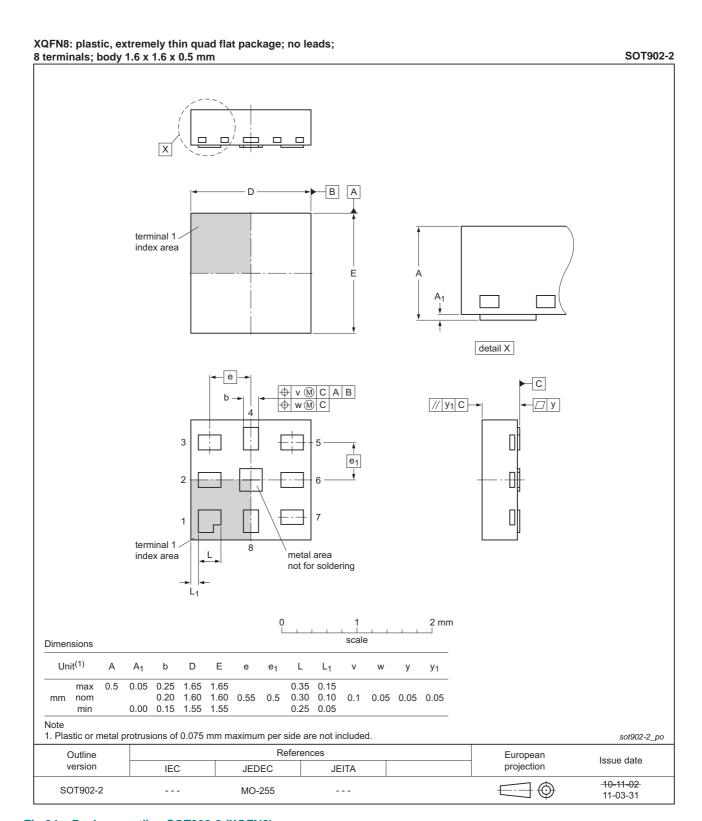


Fig 24. Package outline SOT902-2 (XQFN8)

NCX2220 All information provided in this document is subject to legal disclaimers.

Low voltage comparator

15. Abbreviations

Table 8. Abbreviations

Acronym	Description
CDM	Charged Device Model
ESD	ElectroStatic Discharge
HBM	Human Body Model

16. Revision history

Table 9. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
NCX2220 v.4	20120627	Product data sheet	-	NCX2220 v.3
Modifications:	For type numNCX2220DP	nber NCX2220GM the SOT \cos^2 added.	de has changed to S	OT902-2.
NCX2220 v.3	20111110	Product data sheet	-	NCX2220 v.2
Modifications:	 Legal pages 	updated.		
NCX2220 v.2	20111012	Product data sheet	-	NCX2220 v.1
NCX2220 v.1	20110405	Product data sheet	-	-

Low voltage comparator

17. Legal information

17.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

17.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

17.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

NCX2220

All information provided in this document is subject to legal disclaimers.

Low voltage comparator

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

17.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

18. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

19 of 20

NCX2220 NXP Semiconductors

Low voltage comparator

19. Contents

1	General description
2	Features and benefits
3	Applications
4	Ordering information
5	Marking
6	Functional diagram
7	Pinning information
7.1	Pinning
7.2	Pin description
8	Limiting values
9	Recommended operating conditions 4
10	Static characteristics
11	Dynamic characteristics
12	Graphs
13	Application information
13.1	Operating description
13.2	Output stage
13.3	Schmitt trigger oscillator
13.4	Zero-crossing detector
13.5	One-shot multivibrator 1
13.6	Logic level translator1
14	Package outline
15	Abbreviations17
16	Revision history
17	Legal information
17.1	Data sheet status
17.2	Definitions
17.3	Disclaimers
17.4	Trademarks19
18	Contact information
19	Contents 20

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Analog Comparators category:

Click to view products by NXP manufacturer:

Other Similar products are found below:

SC2903VDR2G LM2901SNG LM339SNG 55122 5962-8757203IA NTE911 5962-8751601DA LM339EDR2G NTE922 SC2901DR2G LM2903M/TR LM2903F-E2 MCP6544-EP MCP6542T-E/MS LM2901EDR2G TS391SN2T1G LM111JG LM239APT HMC675LC3CTR 5962-8765801PA MAX9024AUD+ LT6700HVIS6-2#TRMPBF 5962-8765902CA ADCMP394ARZ-RL7 LM339AMX LTC1440IMS8#PBF AZV331KSTR-G1 LTC1841IS8#PBF LTC1440CN8#PBF LTC1542CS8#PBF LTC1445CS#PBF TL331VSN4T3G LT6700IDCB-1#TRMPBF LTC1042CN8#PBF LTC1540CMS8#PBF LT6703CDC-2#TRMPBF ADCMP607BCPZ-R7 LT1720CDD#PBF LTC1040CN#PBF LT6700MPDCB-1#TRMPBF LT6700IDCB-3#TRMPBF LTC1440IS8#PBF S-89431ACNC-HBVTFG CMP402GSZ-REEL NTE1718 NTE943 NTE943M NTE943SM TA75S393F,LF(T ALD2301APAL