
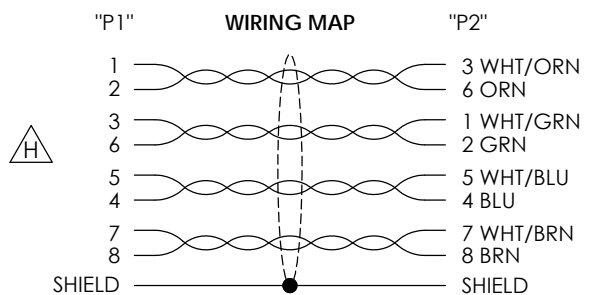


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
G	ECN 5811: DELETED SHIELDING NOTE, REVISED PACKAGING NOTE	11/1/11	D.FRISIELLO
H	ECN 7327: REVISED ALL NOTES, FORMAT, ROHS, WIRING MAP	3/7/14	D.FRISIELLO

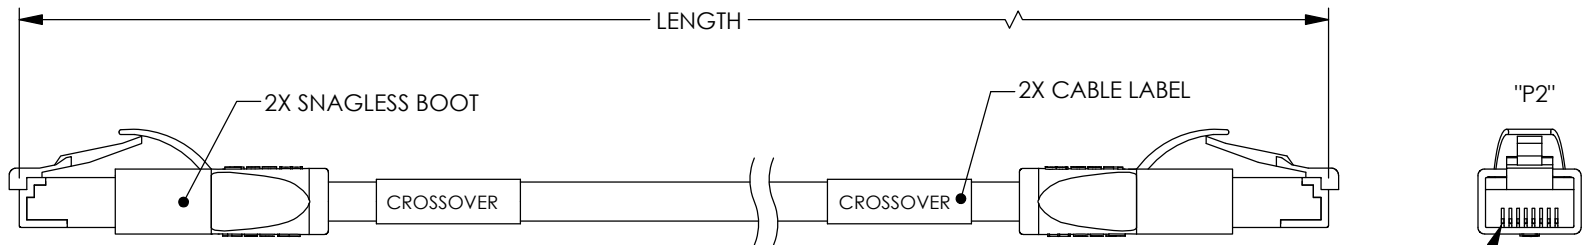

**NOTES:**

**MATERIAL:**  
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0  
 CONTACTS: PHOSPHOR BRONZE  
 CABLE JACKET: PVC, GRAY (RAL 7044)  
 SNAGLESS BOOT: LSZH THERMOPLASTIC, RED

**FINISH:**  
 CONTACTS: 50 μINCHES GOLD IN CONTACT AREA  
 OVER 100 μINCHES NICKEL PLATE OVERALL.  
 SHIELDING: NICKEL PLATED.

**CABLE CHARACTERISTICS:**  
 UL STYLE 2835, TYPE CMG  
 FOUR TWISTED PAIRS CAT5E CABLE, 26AWG STRANDED BARE COPPER WITH ALUMINUM/POLYESTER FOIL SHIELD AND DRAIN WIRE.

**MISCELLANEOUS:**  
 PLUG CONFORMS TO TIA-1096.  
 OPERATING TEMPERATURE RANGE: -10°C TO +75°C.  
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

PART NUMBER	LENGTH		PART NUMBER	LENGTH	
	FEET	METERS		FEET	METERS
TRD855XCR-1	1	0.31	TRD855XCR-30	30	9.14
TRD855XCR-2	2	0.61	TRD855XCR-40	40	12.19
TRD855XCR-3	3	0.91	TRD855XCR-50	50	15.24
TRD855XCR-5	5	1.52	TRD855XCR-60	60	18.29
TRD855XCR-7	7	2.13	TRD855XCR-75	75	22.86
TRD855XCR-10	10	3.05	TRD855XCR-80	80	24.38
TRD855XCR-15	15	4.57	TRD855XCR-90	90	27.43
TRD855XCR-20	20	6.1	TRD855XCR-100	100	30.48
TRD855XCR-25	25	7.62			

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.27]	APPROVALS DRAWN BY MCCORMICK CHECKED BY D.PARHAM APPROVED BY R.CARRICK	DATE 12/27/01 12/27/01 12/27/01	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY TELECOM/MODULAR
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. TRD855XCR	REV. <b>H</b>
		SCALE: NONE	CAD FILE: TRD855XCR.SLDDRW	
		SHEET 1 OF 1		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [l-com manufacturer](#):*

Other Similar products are found below :

[FOA-550A](#) [SDRA15AG](#) [UMC-201](#) [CSMN50MF-5](#) [CSMNB15MF-15](#) [TRD815RA2BL-5](#) [CA3N050](#) [CA3A-90DA-1M](#) [U3A00003-03M](#)  
[CTLF3VGAMM-20](#) [HDCAMM-3](#) [U3A00014-03M](#) [ECF-SK-25](#) [CSMT15MF-10](#) [CSMT15MM-15](#) [CSMT15MM-25](#) [CSPL15MF-50](#)  
[CSPL25MF-25](#) [CSPL9MF-10](#) [CSPL9MF-5](#) [CSPL25MF-5](#) [CSPL25MF-2.5](#) [AL-IPEPS](#) [NB201611-10F-1](#) [TDG1026KC5-MNL](#) [NB121005-](#)  
[10F](#) [TRD855SRA6DBL-05M](#) [TRD855SRA6DBL-10M](#) [TRD855SRA7DBL-1M](#) [TRD855SRA7DBL-10M](#) [PR175SCDLCQ24](#) [TRG508-T4T-](#)  
[3M](#) [TRA5261-15F](#) [TRA5261S-1F](#) [TRA6261-1F](#) [TRA6261-10F](#) [USBBFT](#) [DGB25M](#) [CASATAL-18](#) [CSM25MM-10](#) [CSM37MF-10](#)  
[CSUSB-100](#) [CA3A-90RA-1M](#) [CA3A-90RMICB-1M](#) [U2A00003-3M](#) [U3A00003-05M](#) [U2A00008-12I](#) [U3A00056-03M](#) [U3A00007-075M](#)  
[U3A00007-1M](#)