


4mm LED Indicators




- Chrome Plated Brass Bezel
- Prominent or Recessed Style
- Choice of LED Types and Colours





- Black Nickel Plated Brass Bezel
- Prominent or Recessed Style
- Choice of LED Types and Colours




Specification	DX1116, DX1118/Colour	DX1117, DX1119/Colour	
Bezel Materials:	Brass, Chrome Plated	Brass, Nickel Plated - Black	
Style:	Recessed (DX1116) Prominent (DX1118)	Recessed (DX1117) Prominent (DX1119)	
Operating Temp. Range:	Dependent on LED used	Dependent on LED used	
Storage Temperature:	Dependent on LED used	Dependent on LED used	
Lead Solder Time:	260°C for 5 seconds max.	260°C for 5 seconds max.	
LED Colours:	/RD (Red), /GN (Green), /YL (Yellow), /BL (Blue)	/RD (Red), /GN (Green), /YL (Yellow), /BL (Blue)	
	See Page 158 for LED specifications		

www.bulgin.co.uk




4mm LED options

4mm LEDs STANDARD					
Specification	Red	Green	Yellow	Blue	
Luminous Intensity @10mA:	2.5mcd	2.5mcd	2.5mcd	12mcd	
Forward voltage:	2.0V	2.1V	2.0V	3.5V	
Cont. Forward Current (max):	30mA	30mA	20mA	30mA	
Power Dissipation (max) @ 20°C Ambient:	100mW	100mW	85mW	120mW	
Reverse Current:	10μA	10μΑ	10μΑ	100μΑ	
Reverse Voltage:	5V (max)				
Part No:	/RD	/GN	/YL	/BL	



PART NO BREAKDOWN

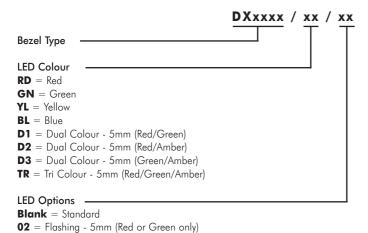

Example:

DX1092/RD/02 = Black Aluminum IP66 Prominent Bezel, with Red flashing LED

158 www.bulgin.co.uk

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Industrial Panel Mount Indicators / Switch Indicators category:

Click to view products by Bulgin manufacturer:

Other Similar products are found below:

LW1A-P1-W LW1B-A0L 01-952.0 01-152.025 D38999/20FJ29PB L/C 704-6012 704-6020 704-6023 704-6026 73.362.4028.0 EUS-704.000.7 750-1520 9001OA120 99-450.837 99-455.837 99-486.837 99-901.9 99-902.9 99-908.0 99-909.4 99-909.5 A0244J1 A3DT-500Y AL6M-P7P-A AOLQW-2B0600 AP1M255-A APD106LN-A APD106LN-G APN1126-G APS122DN-W ATN2100 AYLW4L-A 18-237.035 C0180AANAH HW1A-L1-GD HW1A-P2-GL HW1F-3G HW1R-2DF20-R HW1X-BM411-R HW2A-L1-GL HW2A-P1-GD HW4S-31L HWAZ1N-OB PA2200/1 PA2SHIELD 21-931.0 21-931.2 96-923.5 1625006 99-451.837